



CSEP567-- tonight

- I. Color
- II. Accelerometers and PWM

I. Color Spaces




Color



- Color perception usually involves three quantities:
 - *Hue*: Distinguishes between colors like red, green, blue, etc
 - *Saturation*: How far the color is from a gray of equal intensity
 - *Lightness*: The perceived intensity of a reflecting object
- Sometimes lightness is called *brightness* if the object is emitting light instead of reflecting it.
- In order to use color precisely in computer graphics, we need to be able to specify and measure colors.

Color Spaces

- **Definition:** A mapping of color components onto a Cartesian coordinate system in three or more dimensions.
- RGB, CMY, XYZ, HSV, HLS, Lab, UVW, YUV, YCrCb, Luv, $L^* u^* v^*$, ..
- **Different Purposes:** display, editing, computation, compression, ..
- Equally distant colors may not be equally perceivable




Additive Model: (RGB System)

- R, G, B normalized on orthogonal axes
- All representable colors inside the unit cube
- Color Monitors mix R, G and B
- Video cameras pick up R, G and B
- CIE (Commission Internationale de l'Eclairage) standardized in 1931: B: 435.8 nm, G: 546.1 nm, R: 700 nm.
- 3 fixed components acting alone can't generate all spectrum colors.


CSEIP567

Color-Accelerometers

5

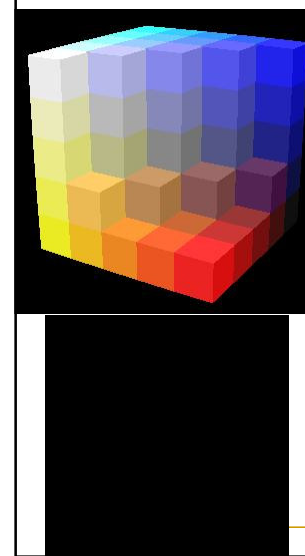

RGB Color space

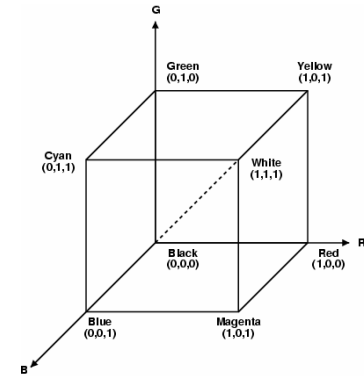

Color-Accelerometers

6

Problems with RGB

- Only a small range of potential perceivable colors (particularly for monitor RGB)
- It isn't easy for humans to say how much of RGB to use to get a given color
 - How much R, G and B is there in "brown"?
- Perceptually non-linear
 - Two points, a certain distance apart, may be perceptually different in one part of the space, but could be same in another part of the space.


CSEIP567

Color-Accelerometers

7

Subtractive model (CMY System)



- Color results from removal of light from the illumination source
- Pigments absorb R, G or B and so give C, M or Y
 - Used in deskjet/ inkjet printers.
 - No ink (pigment) = white

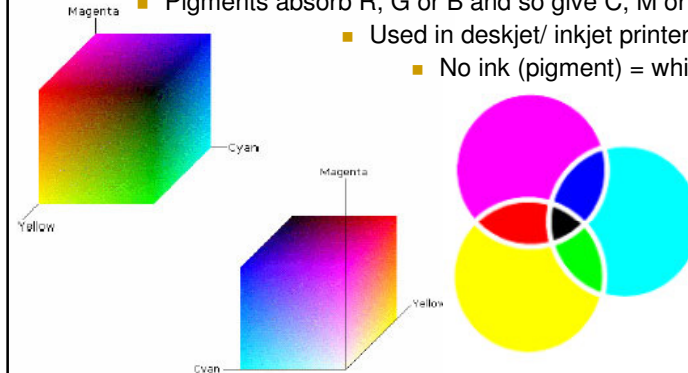

CSEIP567

Color-Accelerometers

8

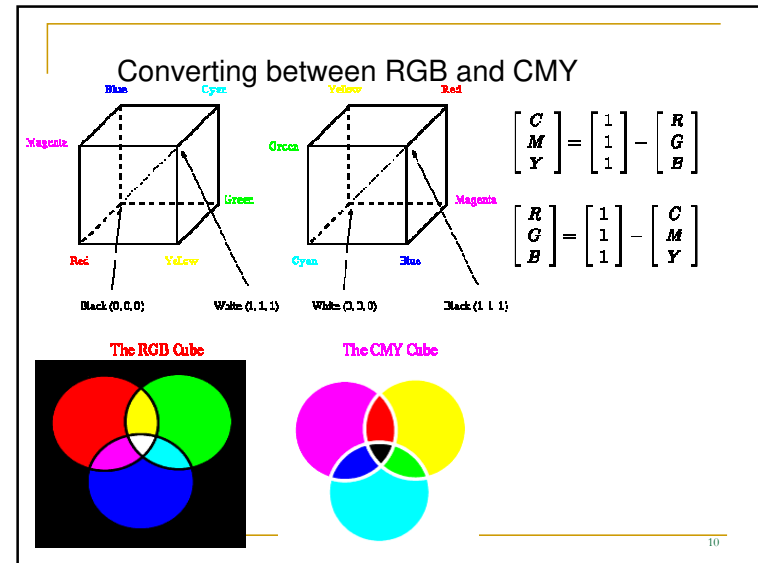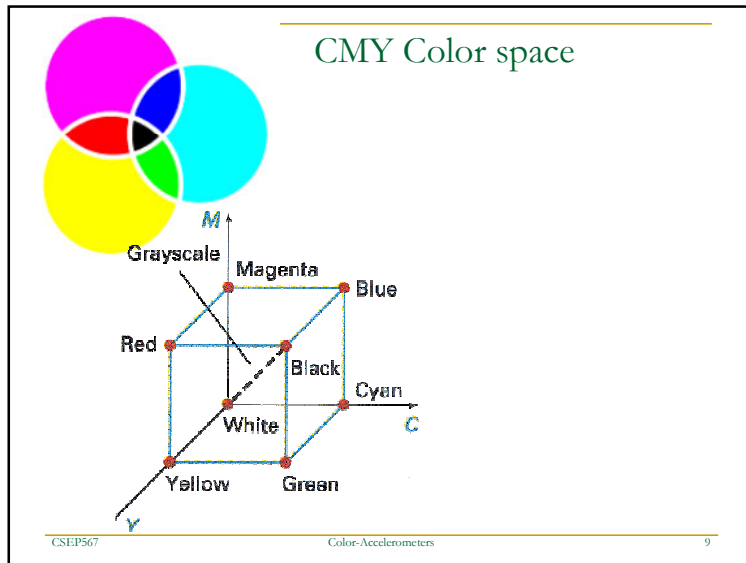

Specifying Color

- Color perception usually involves three quantities:
 - Hue: Distinguishes between colors like red, green, blue, etc
 - Saturation: How far the color is from a gray of equal intensity
 - Lightness: The perceived intensity of a reflecting object
- Sometimes lightness is called *brightness* if the object is emitting light instead of reflecting it.

CSEP567 Color-Accelerometers 11

How Do Artists Do It?

- Artists often specify color as tints, shades, and tones of saturated (pure) pigments
- Tint:** Gotten by adding white to a pure pigment, decreasing saturation
- Shade:** Gotten by adding black to a pure pigment, decreasing lightness
- Tone:** Gotten by adding white and black to a pure pigment

CSEP567 Color-Accelerometers 12

HSV Color Space

- Computer scientists frequently use an intuitive color space that corresponds to tint, shade, and tone:
 - Hue - The color we see (red, green, purple)
 - Saturation - How far is the color from gray (pink is less saturated than red, sky blue is less saturated than royal blue)
 - Brightness (Luminance) - How bright is the color (how bright are the lights illuminating the object?)




CSEP567

Color-Accelerometers

13

HSV Color space

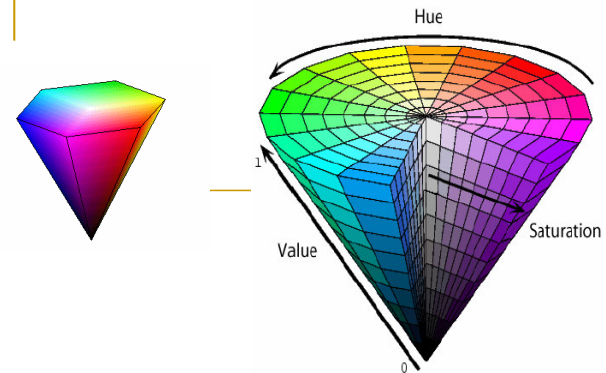


CSEP567

Color-Accelerometers

14

HSV Color Model



- Hue (H) is the angle around the vertical axis
- Saturation (S) is a value from 0 to 1 indicating how far from the vertical axis the color lies
- Value (V) is the height of the hexcone



CSEP567

Color-Accelerometers

15

HSV Color Space

- A more intuitive color space
 - H = Hue
 - S = Saturation
 - V = Value (or brightness)

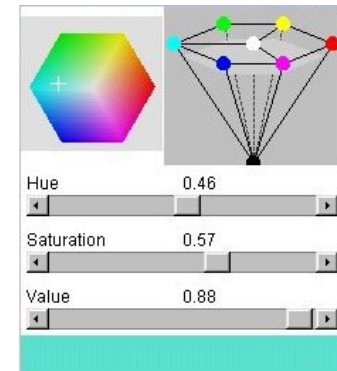

http://www.cs.rit.edu/~ncs/color/a_spaces.html

16

HSV System

- Normally represented as a cone or *hexcone*
- Hue is the angle around the circle or the regular hexagon; $0 \leq H \leq 360$
- Saturation is the distance from the center; $0 \leq S \leq 1$
- Value is the position along the axis of the cone or hexcone; $0 \leq V \leq 1$
- Value is not perceptually-based, so colors of the same value may have slightly different brightness
- Main axis is grey scale

HSV to RGB Conversion

```

if ( S == 0 ) //HSV values = From 0 to 1
{
    R = V * 255 //RGB results = From 0 to 255
    G = V * 255
    B = V * 255
}
else
{
    var_h = H * 6
    var_i = int( var_h ) //Or ... var_i = floor( var_h )
    var_1 = V * ( 1 - S )
    var_2 = V * ( 1 - S * ( var_h - var_i ) )
    var_3 = V * ( 1 - S * ( 1 - ( var_h - var_i ) ) )


    if ( var_i == 0 ) { var_r = V ; var_g = var_3 ; var_b = var_1 }
    else if ( var_i == 1 ) { var_r = var_2 ; var_g = V ; var_b = var_1 }
    else if ( var_i == 2 ) { var_r = var_1 ; var_g = V ; var_b = var_3 }
    else if ( var_i == 3 ) { var_r = var_1 ; var_g = var_2 ; var_b = V }
    else if ( var_i == 4 ) { var_r = var_3 ; var_g = var_1 ; var_b = V }
    else { var_r = V ; var_g = var_1 ; var_b = var_2 }

    R = var_r * 255 //RGB results = From 0 to 255
    G = var_g * 255
    B = var_b * 255
}
    
```

II. Accelerometer

Accelerometer

- Micro-electro-mechanical system that measures force
 - $F = ma$ (1. Newton)
 - Measured as change in capacitance between moving plates
 - Designed for a maximum g-force (e.g., 2-10g)
 - 2-axis and 3-axis versions
 - Used in airbags, laptop disk drives, etc.

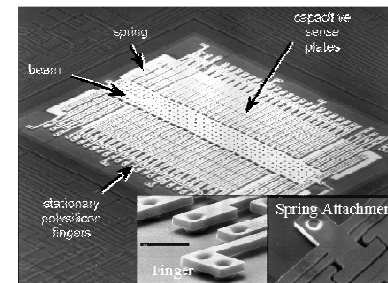

Accelerometer output

- Analog output too susceptible to noise
- Digital output requires many pins for precision
- Use pulse-width modulation
- What about gravity?


CSEP567

Color-Accelerometers

21

Analog Devices ADXL202

- 2-axis accelerometer
 - Set 0g at 50% duty-cycle
 - Positive acceleration increases duty cycle
 - Negative acceleration decreases duty cycle
 - 12.5% per g in either direction

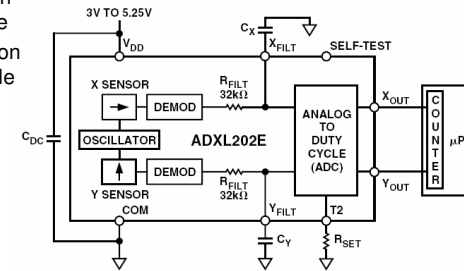


CSEP567

Color-Accelerometers

22

Typical measurement for ADXL202

- Noisy data – all forces are aggregated by accelerometer
- Sample trace at 250Hz

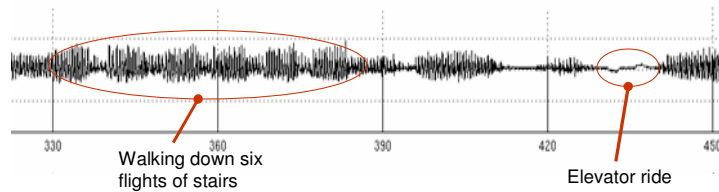


CSEP567

Color-Accelerometers

23

Typical signal from ADXL202

- Cause interrupts at T_a , T_b , and T_c from X-axis output
 1. Look for rising edge, reset counter: $T_a = 0$
 2. Look for falling edge, record timer: $T_b = \text{positive duty cycle}$
 3. Look for rising edge, record timer, reset counter: $T_c = \text{period}$
- Repeat from 2
- Same for Y-axis output (T_2 is the same for both axes)

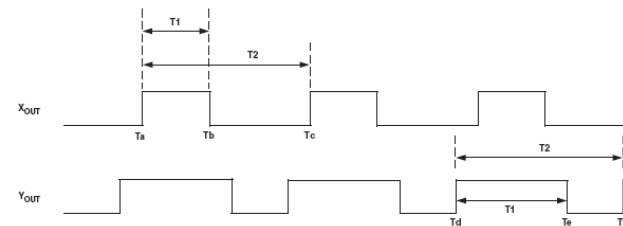

CSEP567

Color-Accelerometers

24

What to do about noise/jitter?

- Average over time – smoothing
 - Software filter – like switch debouncing
- Take several readings
 - use average for T_b and T_c or their ratio
- Running average so that a reading is available at all times
 - e.g., update running average of 4 readings
current average = $\frac{3}{4}$ * current average + $\frac{1}{4}$ * new reading
- Take readings of both T_b and T_c to be extra careful
 - T_c changes with temperature
 - Usually can do T_c just once


CSEP567

Color-Accelerometers

25

Built-in filter

- Filter capacitors limited noise frequency
 - bandwidth limiting



Bandwidth	Capacitor Value
10 Hz	0.47 μ F
50 Hz	0.10 μ F
100 Hz	0.05 μ F
200 Hz	0.027 μ F
500 Hz	0.01 μ F
5 kHz	0.001 μ F


CSEP567

Color-Accelerometers

26

ADXL202 Output

- Accelerometer duty cycle varies with force
- 12.5% for each g
- R_{SET} determines duration of period
- At 1g duty-cycle will be 62.5% (37.5%)



$$A(g) = (T1/T2 - 0.5)/12.5\%$$

$$0g = 50\% \text{ DUTY CYCLE}$$

$$T2(s) = R_{SET}(\Omega)/125M\Omega$$

$T2$	R_{SET}
1 ms	125 k Ω
2 ms	250 k Ω
5 ms	625 k Ω
10 ms	1.25 M Ω


CSEP567

Color-Accelerometers

27

ADXL202 Orientation

- Sensitivity (maximum duty cycle change per degree) is highest when accelerometer is perpendicular to gravity



X Axis Orientation to Horizon (°)	X Output		Y Output (g)	
	X Output (g)	Δ per Degree of Tilt (mg)	Y Output (g)	Δ per Degree of Tilt (mg)
-90	-1.000	-0.2	0.000	17.5
-75	-0.966	4.4	0.259	16.9
-60	-0.866	8.6	0.500	15.2
-45	-0.707	12.2	0.707	12.4
-30	-0.500	15.0	0.866	8.9
-15	-0.259	16.8	0.966	4.7
0	0.000	17.5	1.000	0.2
15	0.259	16.9	0.966	-4.4
30	0.500	15.2	0.866	-8.6
45	0.707	12.4	0.707	-12.2
60	0.866	8.9	0.500	-15.0
75	0.966	4.7	0.259	-16.8
90	1.000	0.2	0.000	-17.5

CSEP567

Color-Accelerometers

28

PWM Calculations

- How big a counter do you need?
- Assume 7.37MHz clock
- 1ms period yields a count of 7370
 - This fits in a 16-bit timer/counter
- Should you use a prescaler for the counter?
- Bit precision issues

```
unsigned int positive;  
unsigned int period;  
unsigned int pos_duty_cycle;
```

BAD:

```
pos_duty_cycle = positive/period;
```

BAD:

```
pos_duty_cycle = ( positive * 1000 ) / period;
```

OKAY:

```
pos_duty_cycle = ( (long) positive * 1000 ) / period;
```