

# CSE-571 Robotics

## Probabilistic Sensor Models

Beam-based  
Scan-based  
Landmarks

10/9/16

## Sensors for Mobile Robots


- **Contact sensors:** Bumpers
- **Internal sensors**
  - Accelerometers (spring-mounted masses)
  - Gyroscopes (spinning mass, laser light)
  - Compasses, inclinometers (earth magnetic field, gravity)
- **Proximity sensors**
  - Sonar (time of flight)
  - Radar (phase and frequency)
  - Laser range-finders (triangulation, tof, phase)
  - Infrared (intensity)
- **Visual sensors:** Cameras, depth cameras
- **Satellite-based sensors:** GPS

10/9/16

CSE-571 - Robotics

2

## Proximity Sensors

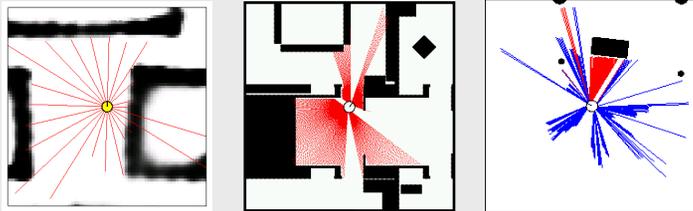

- The central task is to determine  $P(z|x)$ , i.e. the probability of a measurement  $z$  given that the robot is at position  $x$ .
- **Question:** Where do the probabilities come from?
- **Approach:** Let's try to explain a measurement.

10/9/16

CSE-571 - Robotics

3

## Beam-based Sensor Model

- Scan  $z$  consists of  $K$  measurements.

$$z = \{z_1, z_2, \dots, z_K\}$$

10/9/16

CSE-571 - Robotics

4

## Beam-based Sensor Model

- Scan  $z$  consists of  $K$  measurements.

$$z = \{z_1, z_2, \dots, z_K\}$$

- Individual measurements are independent given the robot position.


$$P(z | x, m) = \prod_{k=1}^K P(z_k | x, m)$$

10/9/16

CSE-571 - Robotics

5

## Beam-based Sensor Model

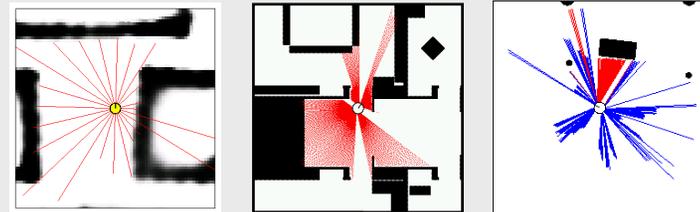

$$P(z | x, m) = \prod_{k=1}^K P(z_k | x, m)$$

10/9/16

CSE-571 - Robotics

6

## Proximity Measurement

- Measurement can be caused by ...
  - a known obstacle.
  - cross-talk.
  - an unexpected obstacle (people, furniture, ...).
  - missing all obstacles (total reflection, glass, ...).
- Noise is due to uncertainty ...
  - in measuring distance to known obstacle.
  - in position of known obstacles.
  - in position of additional obstacles.
  - whether obstacle is missed.


10/9/16

CSE-571 - Robotics

7


## Beam-based Proximity Model

Measurement noise

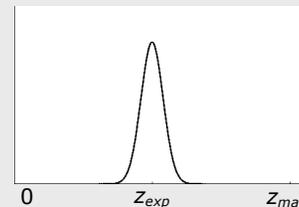

$$P_{hit}(z | x, m) = \eta \frac{1}{\sqrt{2\pi\sigma^2}} e^{-\frac{1}{2} \frac{(z - z_{exp})^2}{\sigma^2}}$$

Unexpected obstacles

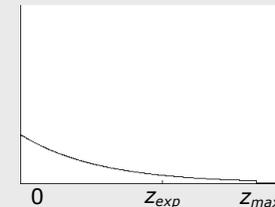

$$P_{unexp}(z | x, m) = \eta \lambda e^{-\lambda z}$$

10/9/16

CSE-571 - Robotics

8


## Beam-based Proximity Model

Random measurement



$$P_{rand}(z | x, m) = \eta \frac{1}{z_{max}}$$

Max range

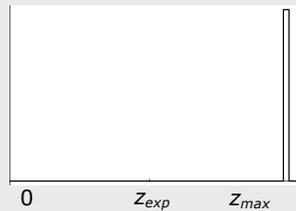


$$P_{max}(z | x, m) = \eta \frac{1}{z_{small}}$$

10/9/16

CSE-571 - Robotics

9

## Mixture Density

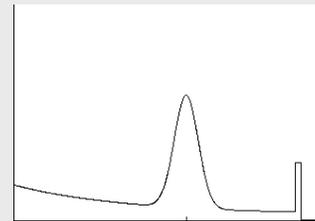

$$P(z | x, m) = \begin{pmatrix} \alpha_{hit} \\ \alpha_{unexp} \\ \alpha_{max} \\ \alpha_{rand} \end{pmatrix}^T \begin{pmatrix} P_{hit}(z | x, m) \\ P_{unexp}(z | x, m) \\ P_{max}(z | x, m) \\ P_{rand}(z | x, m) \end{pmatrix}$$

How can we determine the model parameters?

10/9/16

CSE-571 - Robotics

10

## Approximation

- Maximize log likelihood of the data  $z$ :

$$P(z | z_{exp})$$

- Search parameter space.
- EM to find mixture parameters
  - Assign measurements to densities.
  - Estimate densities using assignments.
  - Reassign measurements.


10/9/16

CSE-571 - Robotics


11

## Raw Sensor Data

Measured distances for expected distance of 300 cm.

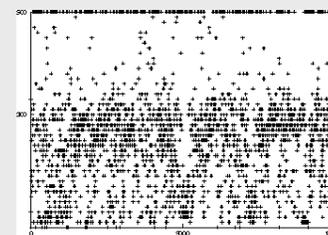

Sonar

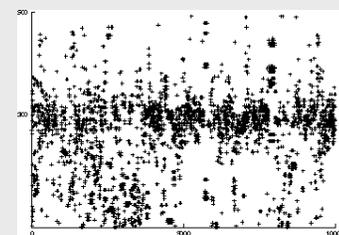


Laser

10/9/16

CSE-571 - Robotics

12

## Approximation Results

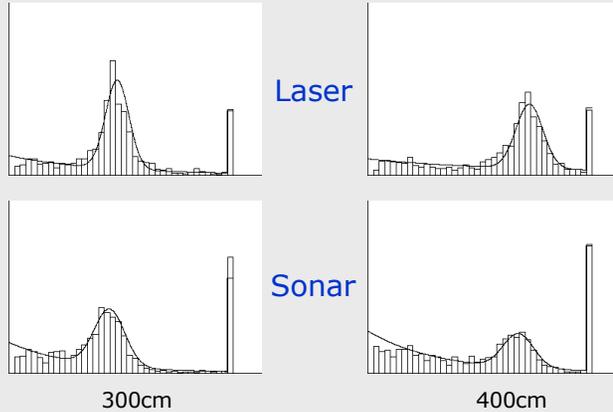


10/9/16

CSE-571 - Robotics

13

## Example

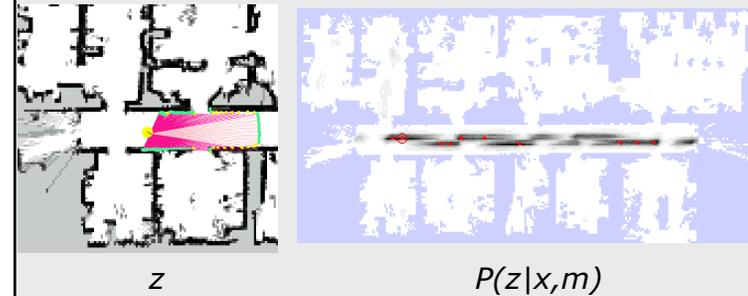

10/9/16

CSE-571 - Robotics

14

## Summary Beam-based Model

- Assumes independence between beams.
  - Justification?
  - Overconfident!
- Models physical causes for measurements.
  - Mixture of densities for these causes.
- Implementation
  - Learn parameters based on real data.
  - Different models can be learned for different angles at which the sensor beam hits the obstacle.
  - Determine expected distances by ray-tracing.
  - Expected distances can be pre-processed.

10/9/16

CSE-571 - Robotics

15

## Scan-based Model

- Beam-based model is ...
  - not smooth for small obstacles and at edges
  - not very efficient.

• **Idea:** Instead of following along the beam, just check the end point.

10/9/16

CSE-571 - Robotics

16

## Scan-based Model


- Probability is a mixture of ...
  - a Gaussian distribution with mean at **distance to closest obstacle**,
  - a uniform distribution for random measurements, and
  - a small uniform distribution for max range measurements.
- Again, independence between different components is assumed.

10/9/16


CSE-571 - Robotics

17

## Example

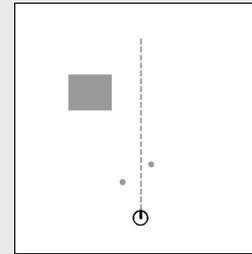

Map  $m$

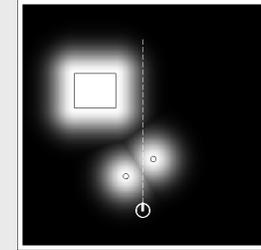

Likelihood field

$$P(z|x,m)$$



10/9/16


CSE-571 - Robotics

18

## San Jose Tech Museum



Occupancy grid map

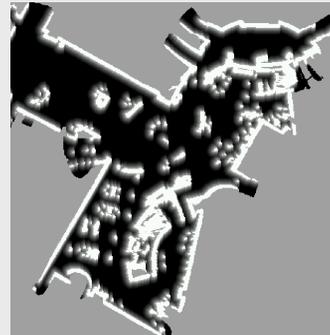

Likelihood field



10/9/16

CSE-571 - Robotics

19

## Scan Matching

- Extract likelihood field from scan and use it to match different scan.

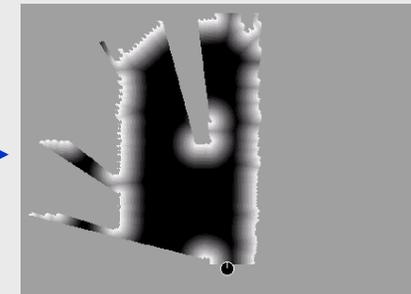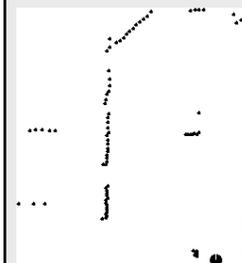

10/9/16

CSE-571 - Robotics

20

## Scan Matching

- Extract likelihood field from first scan and use it to match second scan.



~0.01 sec

10/9/16

CSE-571 - Robotics

21

## Properties of Scan-based Model

- Highly efficient, uses 2D tables only.
- Smooth w.r.t. to small changes in robot position.
- Allows gradient descent, scan matching.
- Ignores physical properties of beams.
- Works for sonars?

10/9/16

CSE-571 - Robotics

22

## Additional Models of Proximity Sensors

- **Map matching (sonar, laser)**: generate small, local maps from sensor data and match local maps against global model.
- **Scan matching (laser)**: map is represented by scan endpoints, match scan into this map using ICP, correlation.
- **Features (sonar, laser, vision)**: Extract features such as doors, hallways from sensor data.

10/9/16

CSE-571 - Robotics

23

## Landmarks

- Active beacons (e.g. radio, GPS)
- Passive (e.g. visual, retro-reflective)
- Standard approach is **triangulation**
  
- Sensor provides
  - distance, or
  - bearing, or
  - distance and bearing.

10/9/16

CSE-571 - Robotics

24

## Distance and Bearing



10/9/16

CSE-571 - Robotics

25

## Probabilistic Model

1. Algorithm `landmark_detection_model(z,x,m)`:

$$z = \langle i, d, \alpha \rangle, x = \langle x, y, \theta \rangle$$

2.  $\hat{d} = \sqrt{(m_x(i) - x)^2 + (m_y(i) - y)^2}$

3.  $\hat{\alpha} = \text{atan2}(m_y(i) - y, m_x(i) - x) - \theta$

4.  $p_{\text{det}} = \text{prob}(\hat{d} - d, \varepsilon_d) \cdot \text{prob}(\hat{\alpha} - \alpha, \varepsilon_\alpha)$




5. Return  $z_{\text{det}} p_{\text{det}} + z_{\text{fp}} P_{\text{uniform}}(z | x, m)$

10/9/16

CSE-571 - Robotics

26

## Distributions for $P(z|x)$

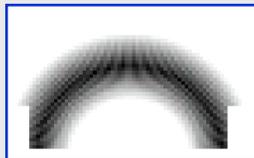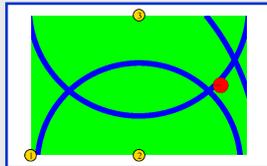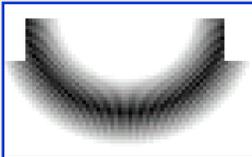

10/9/16

CSE-571 - Robotics

27

## Summary of Parametric Motion and Sensor Models

- Explicitly modeling uncertainty in motion and sensing is key to robustness.
- In many cases, good models can be found by the following approach:
  1. Determine parametric model of noise free motion or measurement.
  2. Analyze sources of noise.
  3. Add adequate noise to parameters (eventually mix in densities for noise).
  4. Learn (and verify) parameters by fitting model to data.
  5. Likelihood of measurement is given by "probabilistically comparing" the actual with the expected measurement.
- It is extremely important to be aware of the underlying assumptions!

10/9/16

CSE-571 - Robotics

28