

CSE-571

Robotics: Algorithms and Applications

Kalman Filters

Bayes Filter Reminder

- Prediction


$$\overline{bel}(x_t) = \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1}$$

- Correction

$$bel(x_t) = \eta p(z_t | x_t) \overline{bel}(x_t)$$



Properties of Gaussians

$$\left. \begin{array}{l} X \sim N(\mu, \sigma^2) \\ Y = aX + b \end{array} \right\} \Rightarrow Y \sim N(a\mu + b, a^2\sigma^2)$$

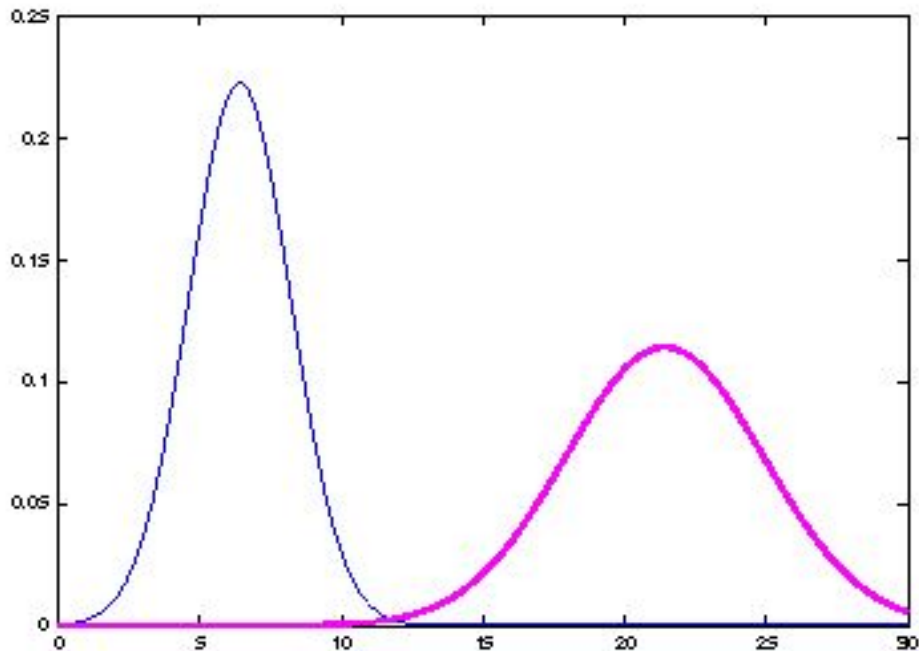

Properties of Gaussians

$$\left. \begin{array}{l} X_1 \sim N(\mu_1, \sigma_1^2) \\ X_2 \sim N(\mu_2, \sigma_2^2) \end{array} \right\} \Rightarrow p(X_1) \cdot p(X_2) \sim N\left(\frac{\sigma_2^2}{\sigma_1^2 + \sigma_2^2} \mu_1 + \frac{\sigma_1^2}{\sigma_1^2 + \sigma_2^2} \mu_2, \frac{1}{\sigma_1^{-2} + \sigma_2^{-2}} \right)$$

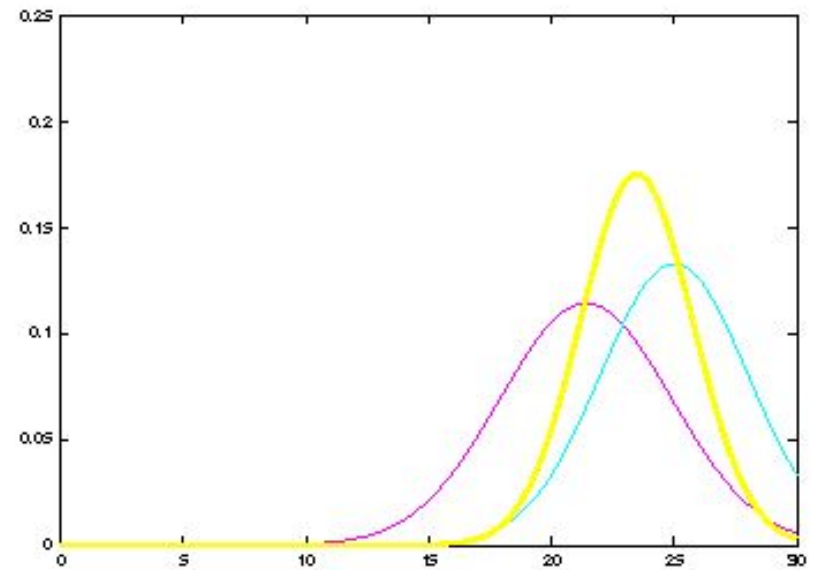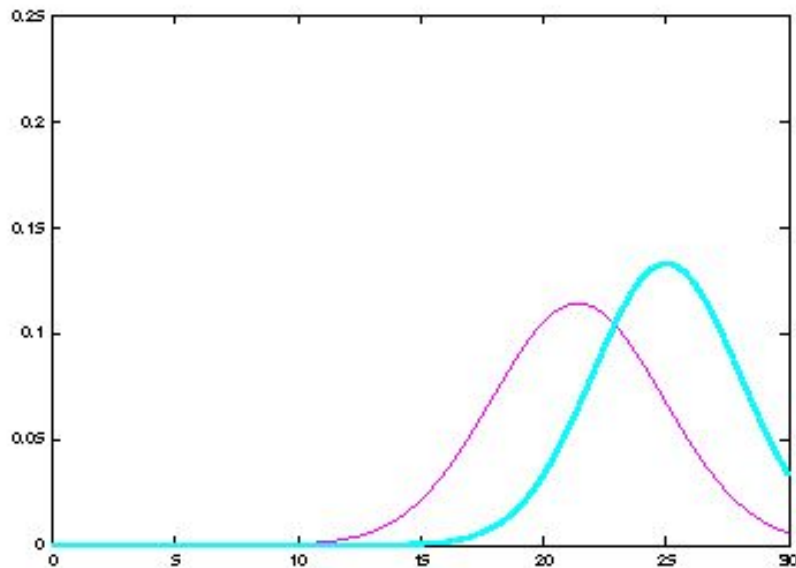

Multivariate Gaussians

$$\left. \begin{array}{l} X \sim N(\mu, \Sigma) \\ Y = AX + B \end{array} \right\} \Rightarrow Y \sim N(A\mu + B, A\Sigma A^T)$$

$$\left. \begin{array}{l} X_1 \sim N(\mu_1, \Sigma_1) \\ X_2 \sim N(\mu_2, \Sigma_2) \end{array} \right\} \Rightarrow p(X_1) \cdot p(X_2) \sim$$

$$N(\Sigma_2(\Sigma_1 + \Sigma_2)^{-1}\mu_1 + \Sigma_1(\Sigma_1 + \Sigma_2)^{-1}\mu_2, (\Sigma_1^{-1} + \Sigma_2^{-1})^{-1})$$

- Marginalization and conditioning in Gaussians results in Gaussians
- We stay in the “Gaussian world” as long as we start with Gaussians and perform only linear transformations.

Discrete Kalman Filter

Estimates the state x of a discrete-time controlled process that is governed by the linear stochastic difference equation

$$x_t = A_t x_{t-1} + B_t u_t + \varepsilon_t$$

with a measurement

$$z_t = C_t x_t + \delta_t$$

Components of a Kalman Filter

$$A_t$$

Matrix (nxn) that describes how the state evolves from $t-1$ to t without controls or noise.

$$B_t$$

Matrix (nxl) that describes how the control u_t changes the state from t to $t-1$.

$$C_t$$

Matrix (kxn) that describes how to map the state x_t to an observation z_t .

$$\varepsilon_t$$

Random variables representing the process and measurement noise that are assumed to be independent and normally distributed with covariance R_t and Q_t respectively.

$$\delta_t$$

Linear Gaussian Systems: Initialization

- Initial belief is normally distributed:

$$bel(x_0) = N(x_0; \mu_0, \Sigma_0)$$

Linear Gaussian Systems: Dynamics

- Dynamics are linear function of state and control plus additive noise:

$$x_t = A_t x_{t-1} + B_t u_t + \varepsilon_t$$

$$p(x_t | u_t, x_{t-1}) = N(x_t; A_t x_{t-1} + B_t u_t, R_t)$$

$$\begin{array}{ccc} \overline{bel}(x_t) = \int p(x_t | u_t, x_{t-1}) & & bel(x_{t-1}) dx_{t-1} \\ \Downarrow & & \Downarrow \\ \sim N(x_t; A_t x_{t-1} + B_t u_t, R_t) & \sim & N(x_{t-1}; \mu_{t-1}, \Sigma_{t-1}) \end{array}$$

Linear Gaussian Systems: Dynamics

$$\overline{bel}(x_t) = \int p(x_t | u_t, x_{t-1}) \quad bel(x_{t-1}) dx_{t-1}$$

$$\Downarrow$$
$$\Downarrow$$

$$\sim N(x_t; A_t x_{t-1} + B_t u_t, R_t) \quad \sim N(x_{t-1}; \mu_{t-1}, \Sigma_{t-1})$$

$$\Downarrow$$

$$\overline{bel}(x_t) = \eta \int \exp \left\{ -\frac{1}{2} (x_t - A_t x_{t-1} - B_t u_t)^T R_t^{-1} (x_t - A_t x_{t-1} - B_t u_t) \right\} \\ \exp \left\{ -\frac{1}{2} (x_{t-1} - \mu_{t-1})^T \Sigma_{t-1}^{-1} (x_{t-1} - \mu_{t-1}) \right\} dx_{t-1}$$

$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t \\ \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t \end{cases}$$

Linear Gaussian Systems: Observations

- Observations are linear function of state plus additive noise:

$$z_t = C_t x_t + \delta_t$$

$$p(z_t | x_t) = N(z_t; C_t x_t, Q_t)$$

$$\begin{array}{ccc} \text{bel}(x_t) = & \eta & p(z_t | x_t) & & \overline{\text{bel}}(x_t) \\ & & \Downarrow & & \Downarrow \\ & & \sim N(z_t; C_t x_t, Q_t) & & \sim N(x_t; \bar{\mu}_t, \bar{\Sigma}_t) \end{array}$$




Linear Gaussian Systems: Observations

$$\begin{aligned} bel(x_t) &= \eta \quad p(z_t | x_t) & \overline{bel}(x_t) \\ &\quad \Downarrow & \Downarrow \\ &\sim N(z_t; C_t x_t, Q_t) & \sim N(x_t; \bar{\mu}_t, \bar{\Sigma}_t) \\ &\quad \Downarrow \\ bel(x_t) &= \eta \exp\left\{-\frac{1}{2}(z_t - C_t x_t)^T Q_t^{-1}(z_t - C_t x_t)\right\} \exp\left\{-\frac{1}{2}(x_t - \bar{\mu}_t)^T \bar{\Sigma}_t^{-1}(x_t - \bar{\mu}_t)\right\} \\ \\ bel(x_t) &= \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - C_t \bar{\mu}_t) \\ \Sigma_t = (I - K_t C_t) \bar{\Sigma}_t \end{cases} & \text{with } K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1} \end{aligned}$$

Kalman Filter Algorithm

1. Algorithm **Kalman_filter** ($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$):
2. Prediction:
3. $\bar{\mu}_t = A_t \mu_{t-1} + B_t u_t$
4. $\bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t$
5. Correction:
6. $K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}$
7. $\mu_t = \bar{\mu}_t + K_t (z_t - C_t \bar{\mu}_t)$
8. $\Sigma_t = (I - K_t C_t) \bar{\Sigma}_t$
9. Return μ_t, Σ_t


Kalman Filter Updates in 1D

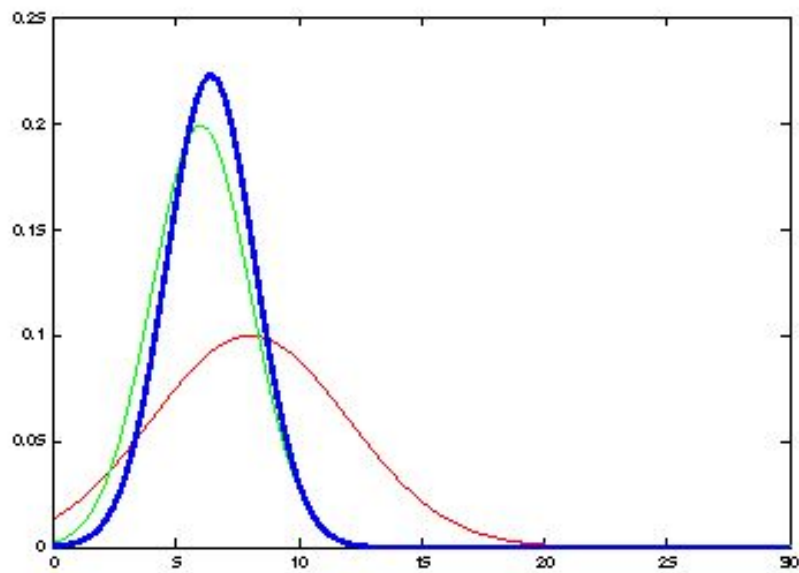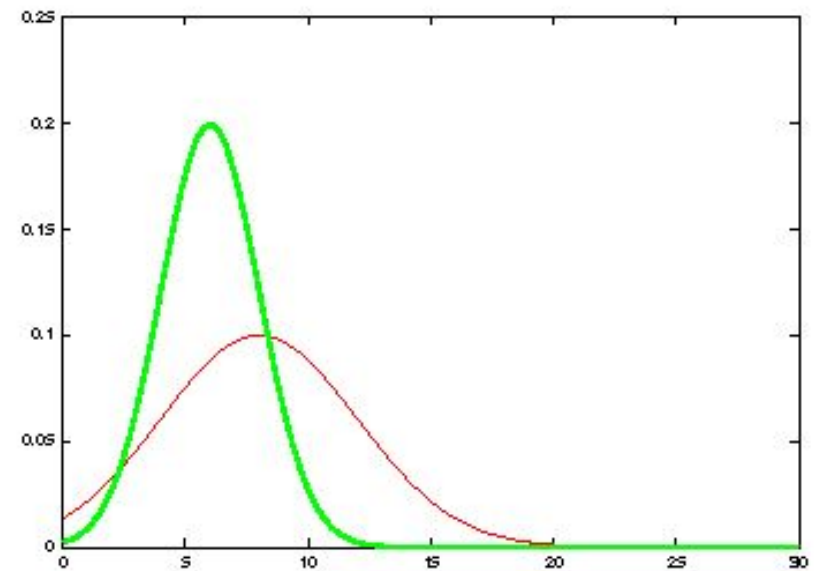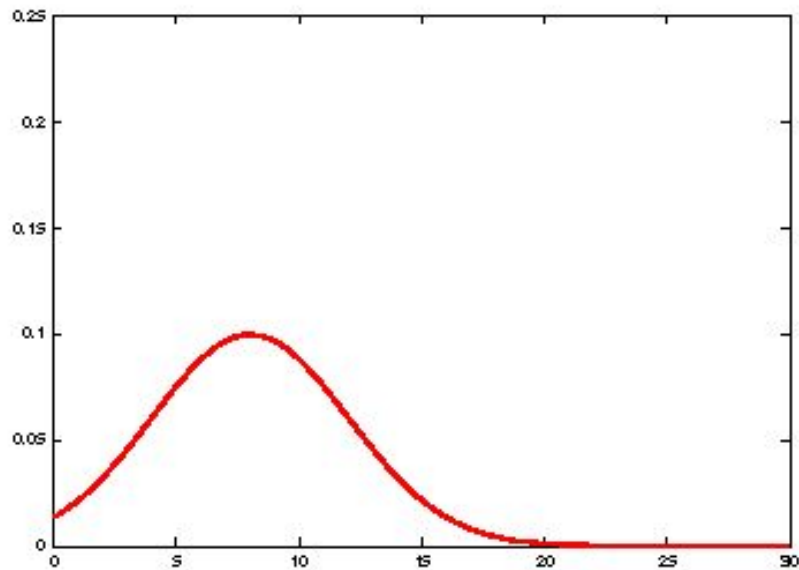

Kalman Filter Updates in 1D

$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - \bar{\mu}_t) \\ \sigma_t^2 = (1 - K_t)\bar{\sigma}_t^2 \end{cases} \quad \text{with} \quad K_t = \frac{\bar{\sigma}_t^2}{\bar{\sigma}_t^2 + \sigma_{obs,t}^2}$$



$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - C_t\bar{\mu}_t) \\ \Sigma_t = (I - K_tC_t)\bar{\Sigma}_t \end{cases} \quad \text{with} \quad K_t = \bar{\Sigma}_tC_t^T(C_t\bar{\Sigma}_tC_t^T + Q_t)^{-1}$$

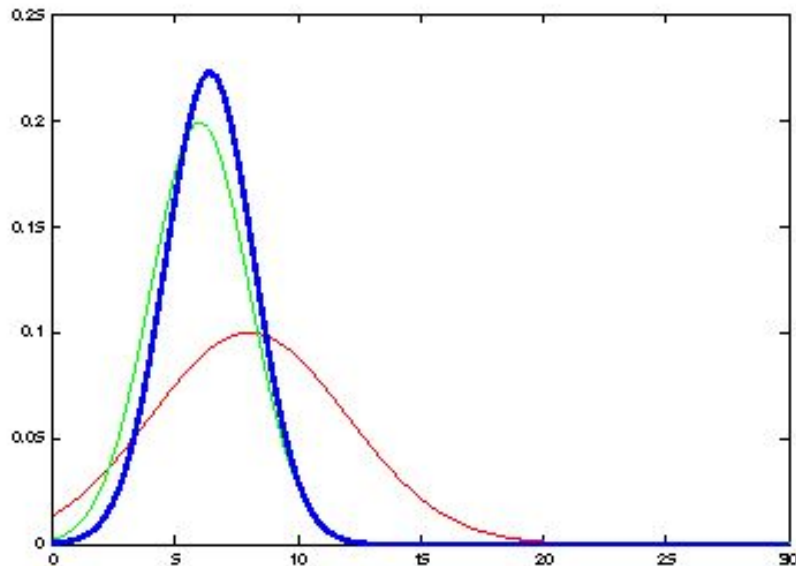





Kalman Filter Updates in 1D

$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = a_t \mu_{t-1} + b_t u_t \\ \bar{\sigma}_t^2 = a_t^2 \sigma_{t-1}^2 + \sigma_{act,t}^2 \end{cases}$$


$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t \\ \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t \end{cases}$$

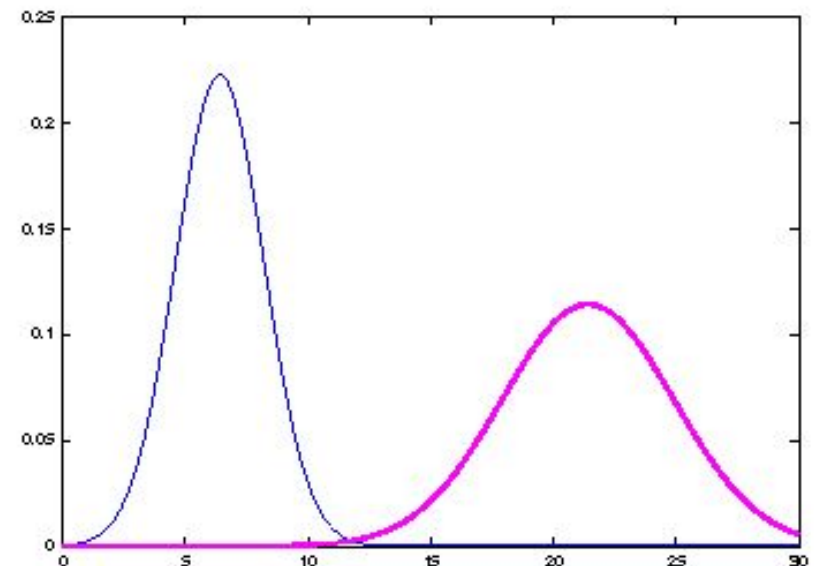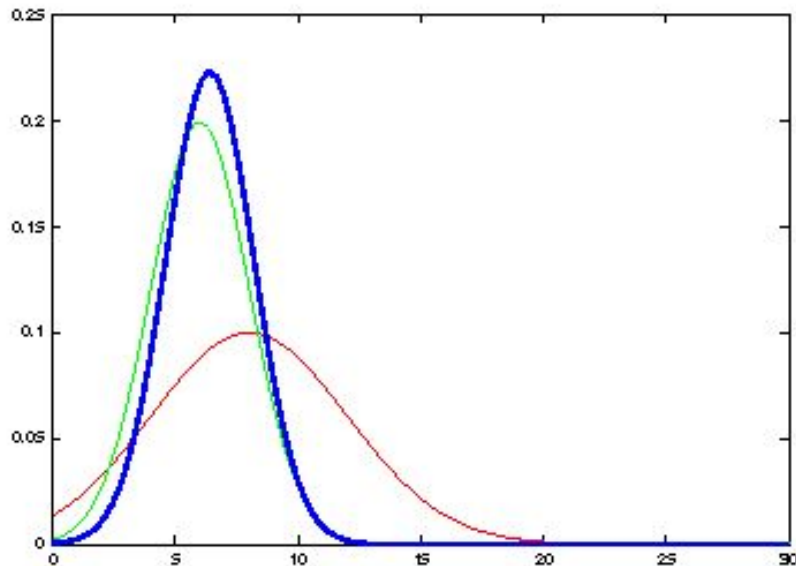

Kalman Filter Updates

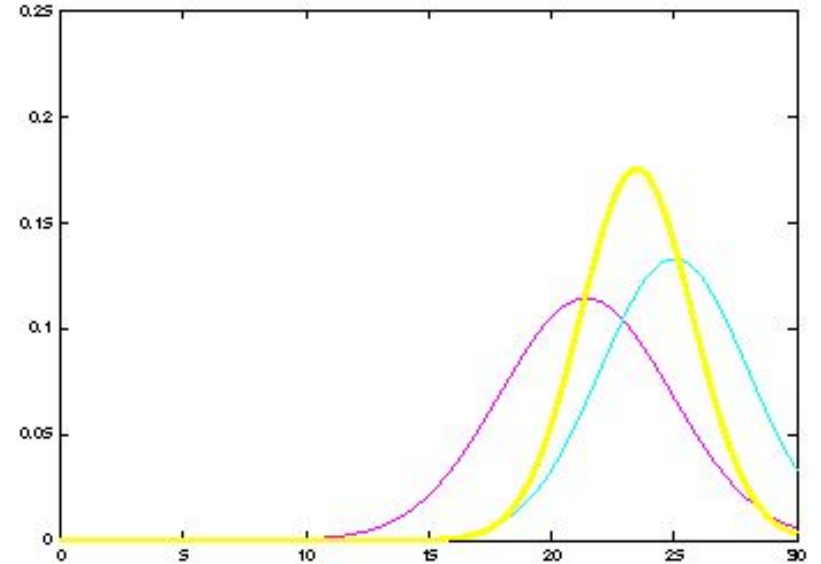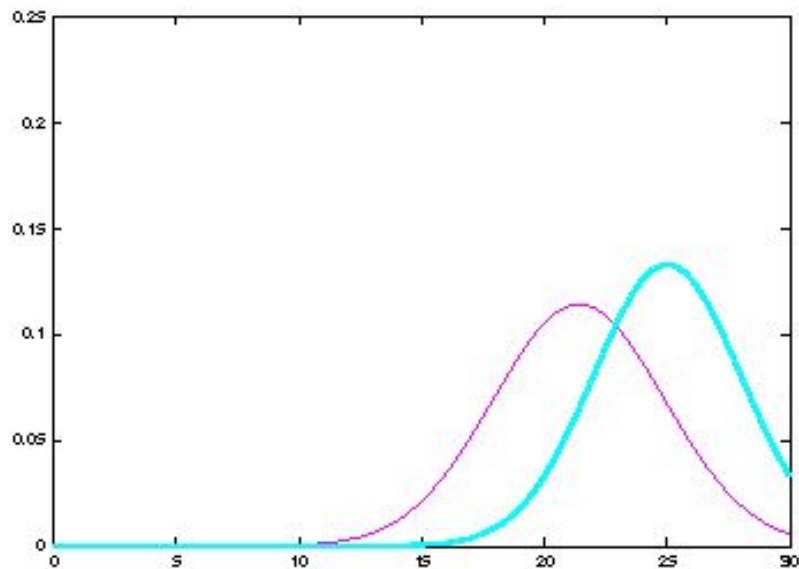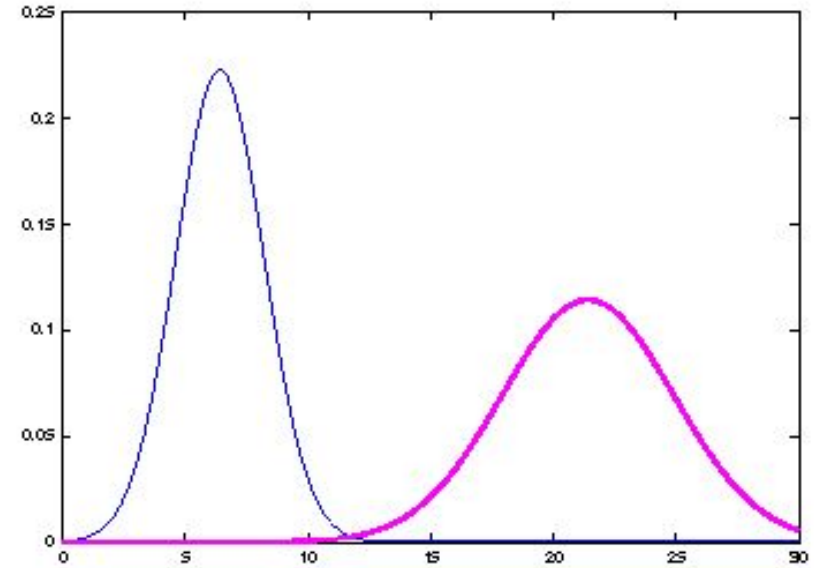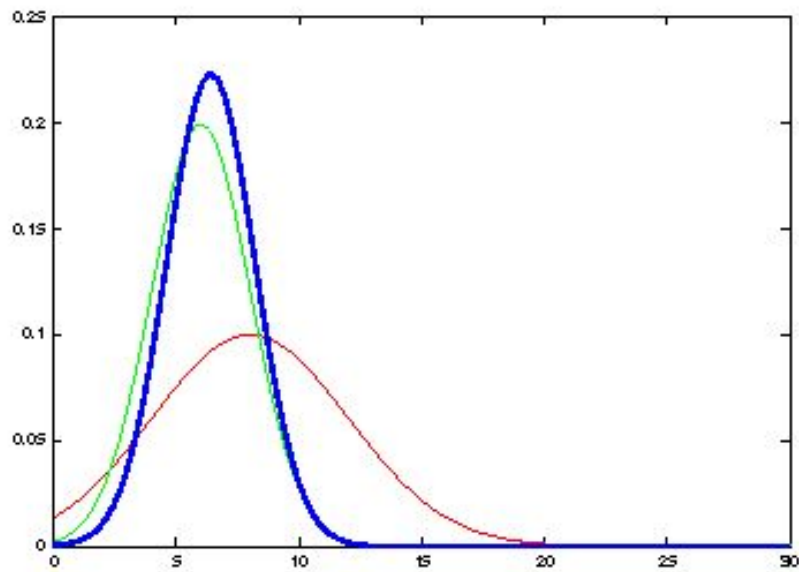


The Prediction-Correction-Cycle

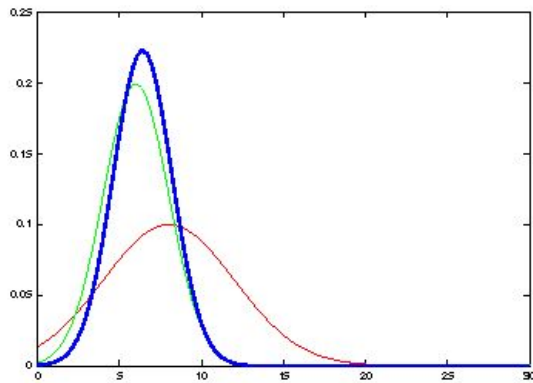


$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = a_t \mu_{t-1} + b_t u_t \\ \bar{\sigma}_t^2 = a_t^2 \sigma_t^2 + \sigma_{act,t}^2 \end{cases}$$

$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t \\ \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t \end{cases}$$

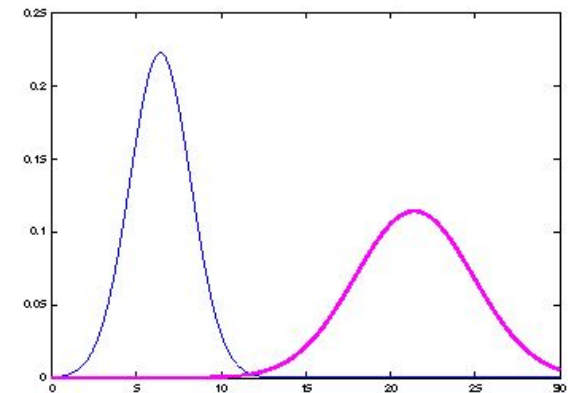


The Prediction-Correction-Cycle

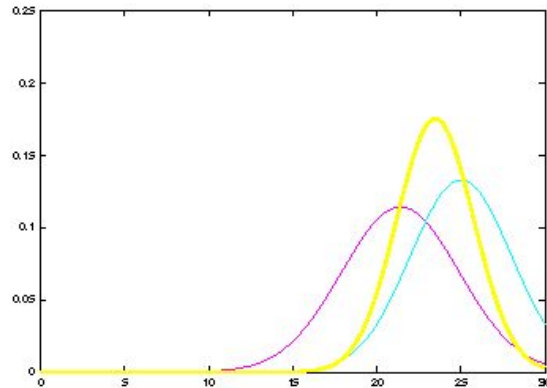

$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - \bar{\mu}_t) \\ \sigma_t^2 = (1 - K_t)\bar{\sigma}_t^2 \end{cases}, K_t = \frac{\bar{\sigma}_t^2}{\bar{\sigma}_t^2 + \sigma_{obs,t}^2}$$

$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - C_t\bar{\mu}_t) \\ \Sigma_t = (I - K_tC_t)\bar{\Sigma}_t \end{cases}, K_t = \bar{\Sigma}_tC_t^T(C_t\bar{\Sigma}_tC_t^T + Q_t)^{-1}$$

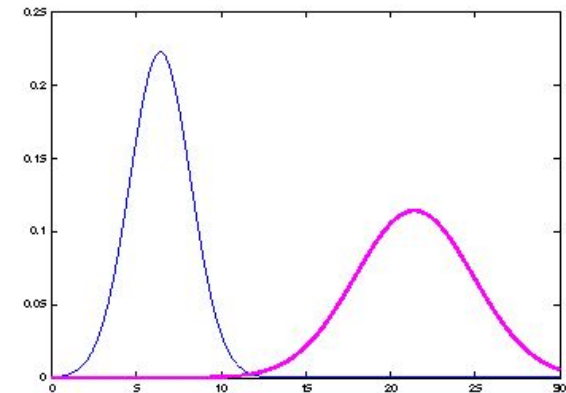

Correction



The Prediction-Correction-Cycle



$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - \bar{\mu}_t) \\ \sigma_t^2 = (1 - K_t)\bar{\sigma}_t^2 \end{cases}, K_t = \frac{\bar{\sigma}_t^2}{\bar{\sigma}_t^2 + \sigma_{obs,t}^2}$$

$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - C_t \bar{\mu}_t) \\ \Sigma_t = (I - K_t C_t) \bar{\Sigma}_t \end{cases}, K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}$$

$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = a_t \mu_{t-1} + b_t u_t \\ \bar{\sigma}_t^2 = a_t^2 \sigma_{t-1}^2 + \sigma_{act,t}^2 \end{cases}$$

$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t \\ \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t \end{cases}$$



Kalman Filter Summary

- **Highly efficient:** Polynomial in measurement dimensionality k and state dimensionality n :
$$O(k^{2.376} + n^2)$$
- **Optimal for linear Gaussian systems!**
- Most robotics systems are **nonlinear!**

Going non-linear

EXTENDED KALMAN FILTER




Nonlinear Dynamic Systems

- Most realistic robotic problems involve nonlinear functions




$$x_t = g(u_t, x_{t-1})$$

$$z_t = h(x_t)$$




Linearity Assumption Revisited

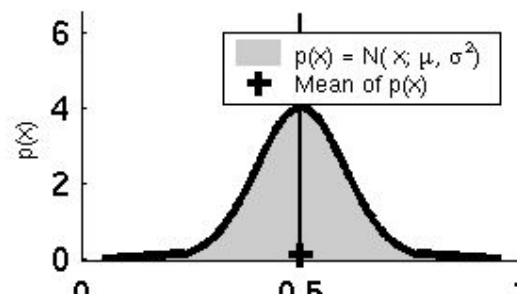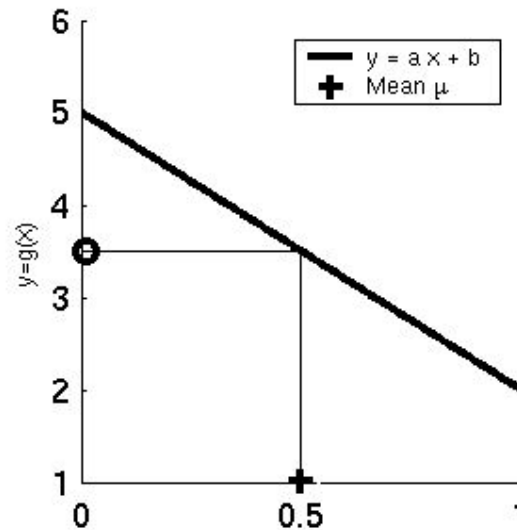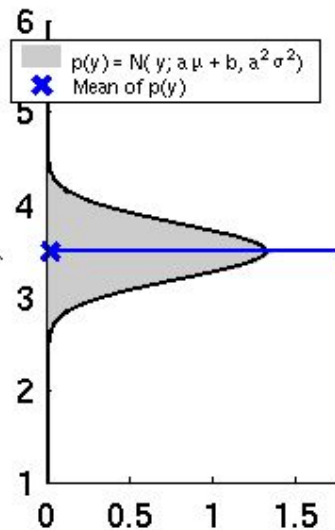


Non-linear Function

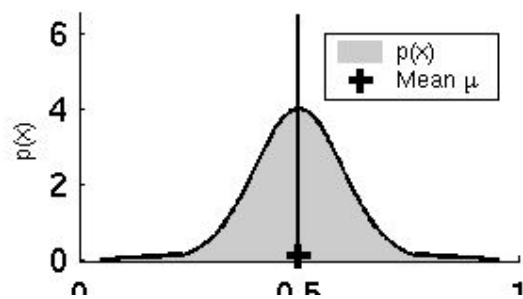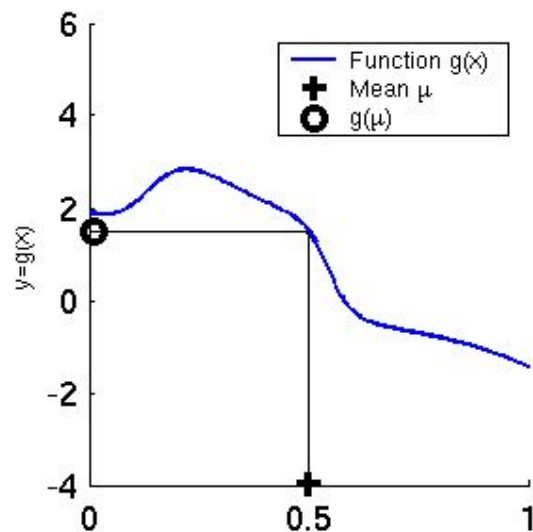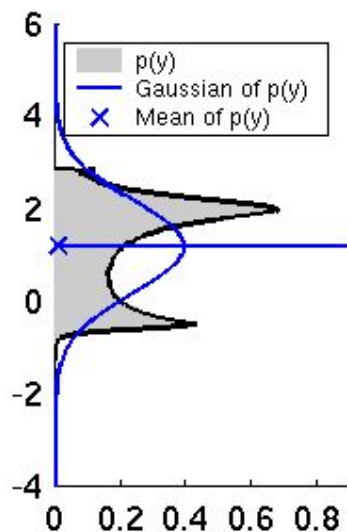




EKF Linearization (1)

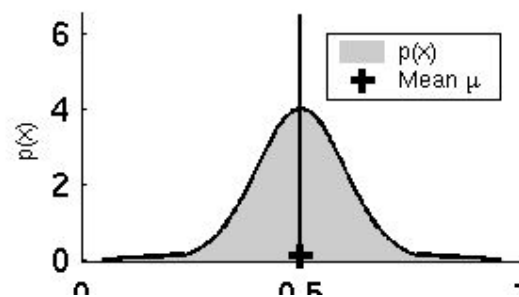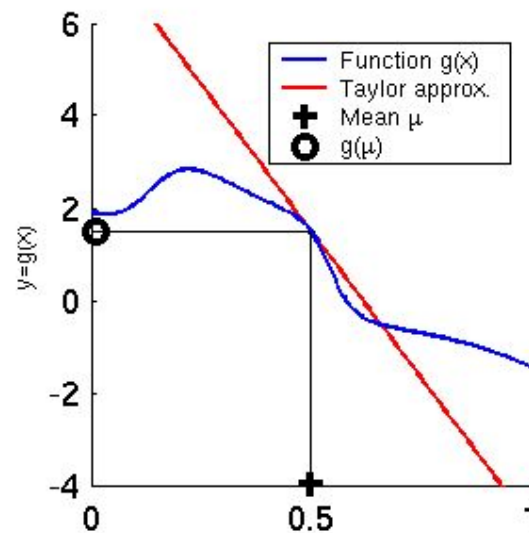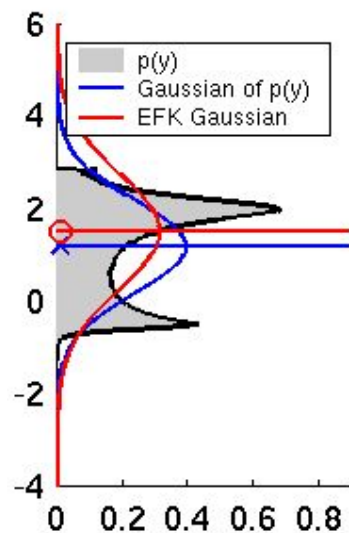

EKF Linearization (2)

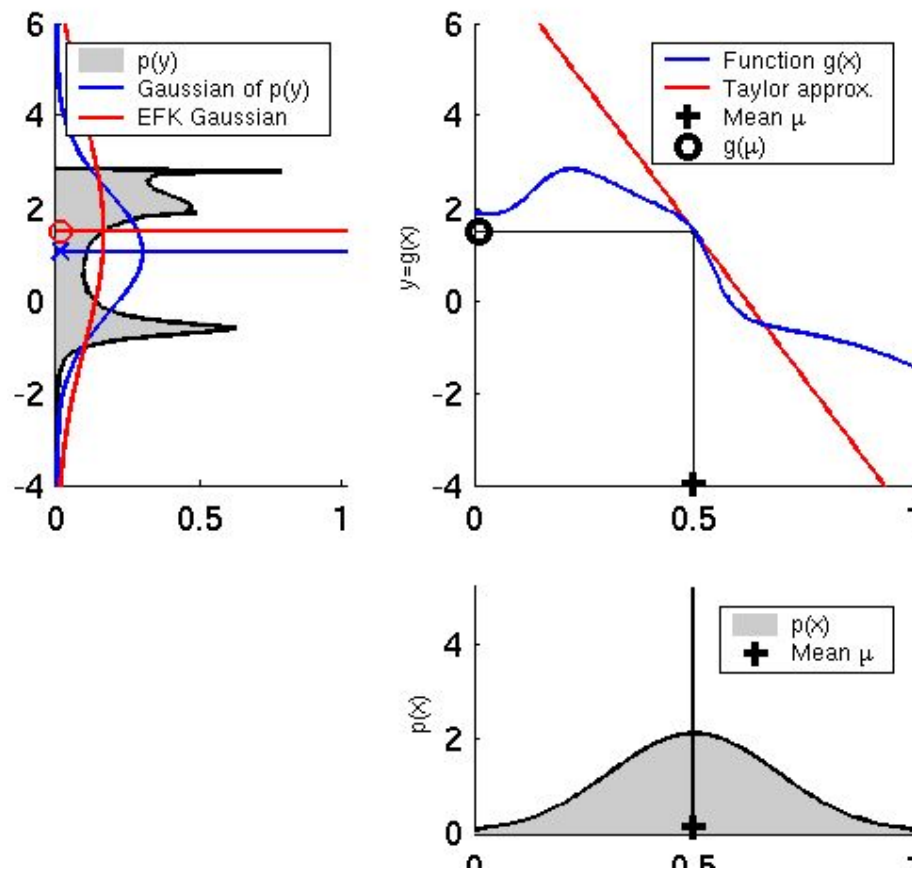

EKF Linearization (3)

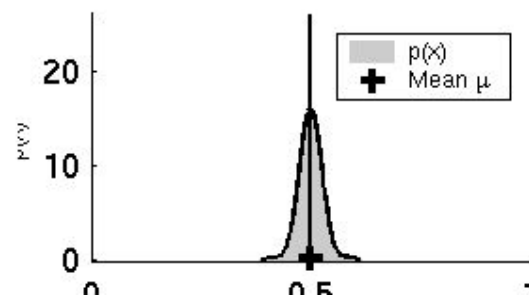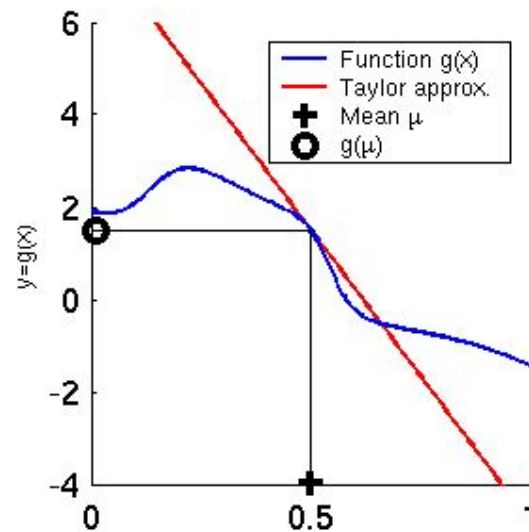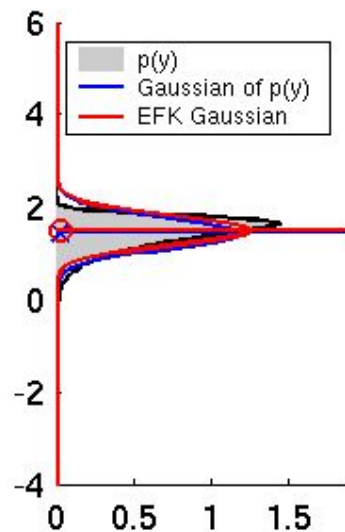

EKF Linearization: First Order Taylor Series Expansion

- Prediction:

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}} (x_{t-1} - \mu_{t-1})$$

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + G_t (x_{t-1} - \mu_{t-1})$$

- Correction:

$$h(x_t) \approx h(\bar{\mu}_t) + \frac{\partial h(\bar{\mu}_t)}{\partial x_t} (x_t - \bar{\mu}_t)$$

$$h(x_t) \approx h(\bar{\mu}_t) + H_t (x_t - \bar{\mu}_t)$$

EKF Algorithm

1. **Extended_Kalman_filter**($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$):

2. Prediction:

3.	$\bar{\mu}_t = g(u_t, \mu_{t-1})$	\longleftarrow	$\bar{\mu}_t = A_t \mu_{t-1} + B_t u_t$
4.	$\bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + R_t$	\longleftarrow	$\bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t$

5. Correction:

6.	$K_t = \bar{\Sigma}_t H_t^T (H_t \bar{\Sigma}_t H_t^T + Q_t)^{-1}$	\longleftarrow	$K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}$
7.	$\mu_t = \bar{\mu}_t + K_t (z_t - h(\bar{\mu}_t))$	\longleftarrow	$\mu_t = \bar{\mu}_t + K_t (z_t - C_t \bar{\mu}_t)$
8.	$\Sigma_t = (I - K_t H_t) \bar{\Sigma}_t$	\longleftarrow	$\Sigma_t = (I - K_t C_t) \bar{\Sigma}_t$
9.	Return μ_t, Σ_t		

$$H_t = \frac{\partial h(\bar{\mu}_t)}{\partial x_t} \qquad G_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}}$$

Localization

“Using sensory information to locate the robot in its environment is the most fundamental problem to providing a mobile robot with autonomous capabilities.” [Cox '91]

- **Given**

- Map of the environment.
- Sequence of sensor measurements.


- **Wanted**

- Estimate of the robot's position.

- **Problem classes**

- Position tracking
- Global localization
- Kidnapped robot problem (recovery)

Landmark-based Localization

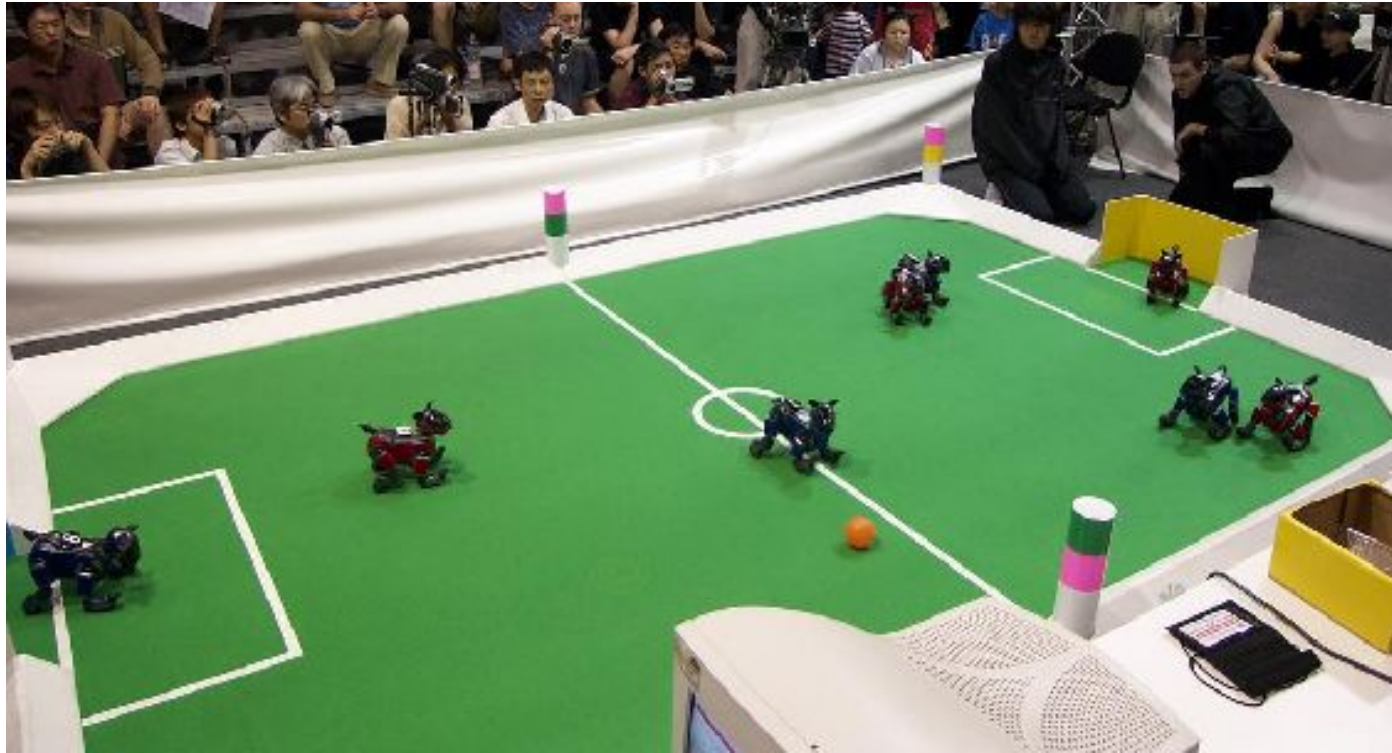

1. EKF_localization ($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$):

Prediction:

2. $G_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}} = \begin{pmatrix} \frac{\partial x'}{\partial \mu_{t-1,x}} & \frac{\partial x'}{\partial \mu_{t-1,y}} & \frac{\partial x'}{\partial \mu_{t-1,\theta}} \\ \frac{\partial y'}{\partial \mu_{t-1,x}} & \frac{\partial y'}{\partial \mu_{t-1,y}} & \frac{\partial y'}{\partial \mu_{t-1,\theta}} \\ \frac{\partial \theta'}{\partial \mu_{t-1,x}} & \frac{\partial \theta'}{\partial \mu_{t-1,y}} & \frac{\partial \theta'}{\partial \mu_{t-1,\theta}} \end{pmatrix}$ Jacobian of g w.r.t location

3. $V_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial u_t} = \begin{pmatrix} \frac{\partial x'}{\partial v_t} & \frac{\partial x'}{\partial \omega_t} \\ \frac{\partial y'}{\partial v_t} & \frac{\partial y'}{\partial \omega_t} \\ \frac{\partial \theta'}{\partial v_t} & \frac{\partial \theta'}{\partial \omega_t} \end{pmatrix}$ Jacobian of g w.r.t control

4. $M_t = \begin{pmatrix} \alpha_1 v_t^2 + \alpha_2 \omega_t^2 & 0 \\ 0 & \alpha_3 v_t^2 + \alpha_4 \omega_t^2 \end{pmatrix}$ Motion noise

5. $\bar{\mu}_t = g(u_t, \mu_{t-1})$ Predicted mean

6. $\bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + V_t M_t V_t^T$ Predicted covariance

1. EKF_localization ($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$): See Notes

Prediction:

$$\theta = \mu_{t-1, \theta}$$

$$G_t = \begin{pmatrix} 1 & 0 & -\frac{v_t}{\omega_t} \cos \theta + \frac{v_t}{\omega_t} \cos(\theta + \omega_t \Delta t) \\ 0 & 1 & -\frac{v_t}{\omega_t} \sin \theta + \frac{v_t}{\omega_t} \sin(\theta + \omega_t \Delta t) \\ 0 & 0 & 1 \end{pmatrix}$$

$$V_t = \begin{pmatrix} \frac{-\sin \theta + \sin(\theta + \omega_t \Delta t)}{\omega_t} & \frac{v_t(\sin \theta - \sin(\theta + \omega_t \Delta t))}{\omega_t^2} + \frac{v_t \cos(\theta + \omega_t \Delta t) \Delta t}{\omega_t} \\ \frac{\cos \theta - \cos(\theta + \omega_t \Delta t)}{\omega_t} & -\frac{v_t(\cos \theta - \cos(\theta + \omega_t \Delta t))}{\omega_t^2} + \frac{v_t \sin(\theta + \omega_t \Delta t) \Delta t}{\omega_t} \\ 0 & \Delta t \end{pmatrix}$$



$$M_t = \begin{pmatrix} \alpha_1 v_t^2 + \alpha_2 \omega_t^2 & 0 \\ 0 & \alpha_3 v_t^2 + \alpha_4 \omega_t^2 \end{pmatrix}$$

$$\bar{\mu}_t = \mu_{t-1} + \begin{pmatrix} -\frac{v_t}{\omega_t} \sin \theta + \frac{v_t}{\omega_t} \sin(\theta + \omega_t \Delta t) \\ \frac{v_t}{\omega_t} \cos \theta - \frac{v_t}{\omega_t} \cos(\theta + \omega_t \Delta t) \\ \omega_t \Delta t \end{pmatrix}$$

$$6. \quad \bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + V_t M_t V_t^T$$

Predicted covariance

EKF Prediction Step

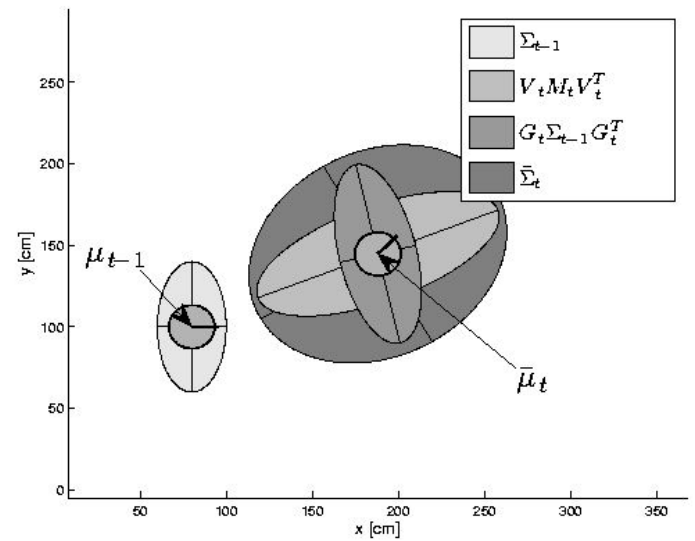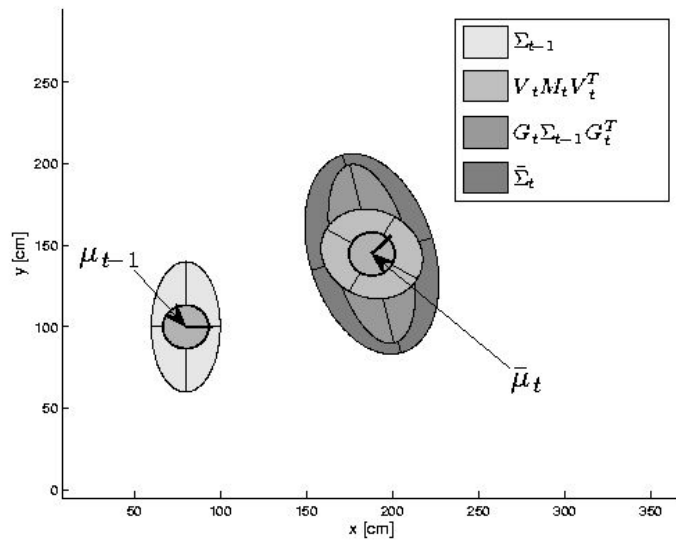

1. **EKF_localization** ($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$): **See Notes**

Correction:

2. $\hat{z}_t = \begin{pmatrix} \sqrt{(m_x - \bar{\mu}_{t,x})^2 + (m_y - \bar{\mu}_{t,y})^2} \\ \text{atan2}(m_y - \bar{\mu}_{t,y}, m_x - \bar{\mu}_{t,x}) - \bar{\mu}_{t,\theta} \end{pmatrix}$ Predicted measurement mean

3. $H_t = \frac{\partial h(\bar{\mu}_t, m)}{\partial x_t} = \begin{pmatrix} \frac{\partial r_t}{\partial \bar{\mu}_{t,x}} & \frac{\partial r_t}{\partial \bar{\mu}_{t,y}} & \frac{\partial r_t}{\partial \bar{\mu}_{t,\theta}} \\ \frac{\partial \phi_t}{\partial \bar{\mu}_{t,x}} & \frac{\partial \phi_t}{\partial \bar{\mu}_{t,y}} & \frac{\partial \phi_t}{\partial \bar{\mu}_{t,\theta}} \end{pmatrix}$ Jacobian of h w.r.t location

4. $Q_t = \begin{pmatrix} \sigma_r^2 & 0 \\ 0 & \sigma_\phi^2 \end{pmatrix}$


5. $S_t = H_t \bar{\Sigma}_t H_t^T + Q_t$ Pred. measurement covariance

6. $K_t = \bar{\Sigma}_t H_t^T S_t^{-1}$ Kalman gain



7. $\mu_t = \bar{\mu}_t + K_t(z_t - \hat{z}_t)$ Updated mean

8. $\Sigma_t = (I - K_t H_t) \bar{\Sigma}_t$ Updated covariance



EKF Correction Step

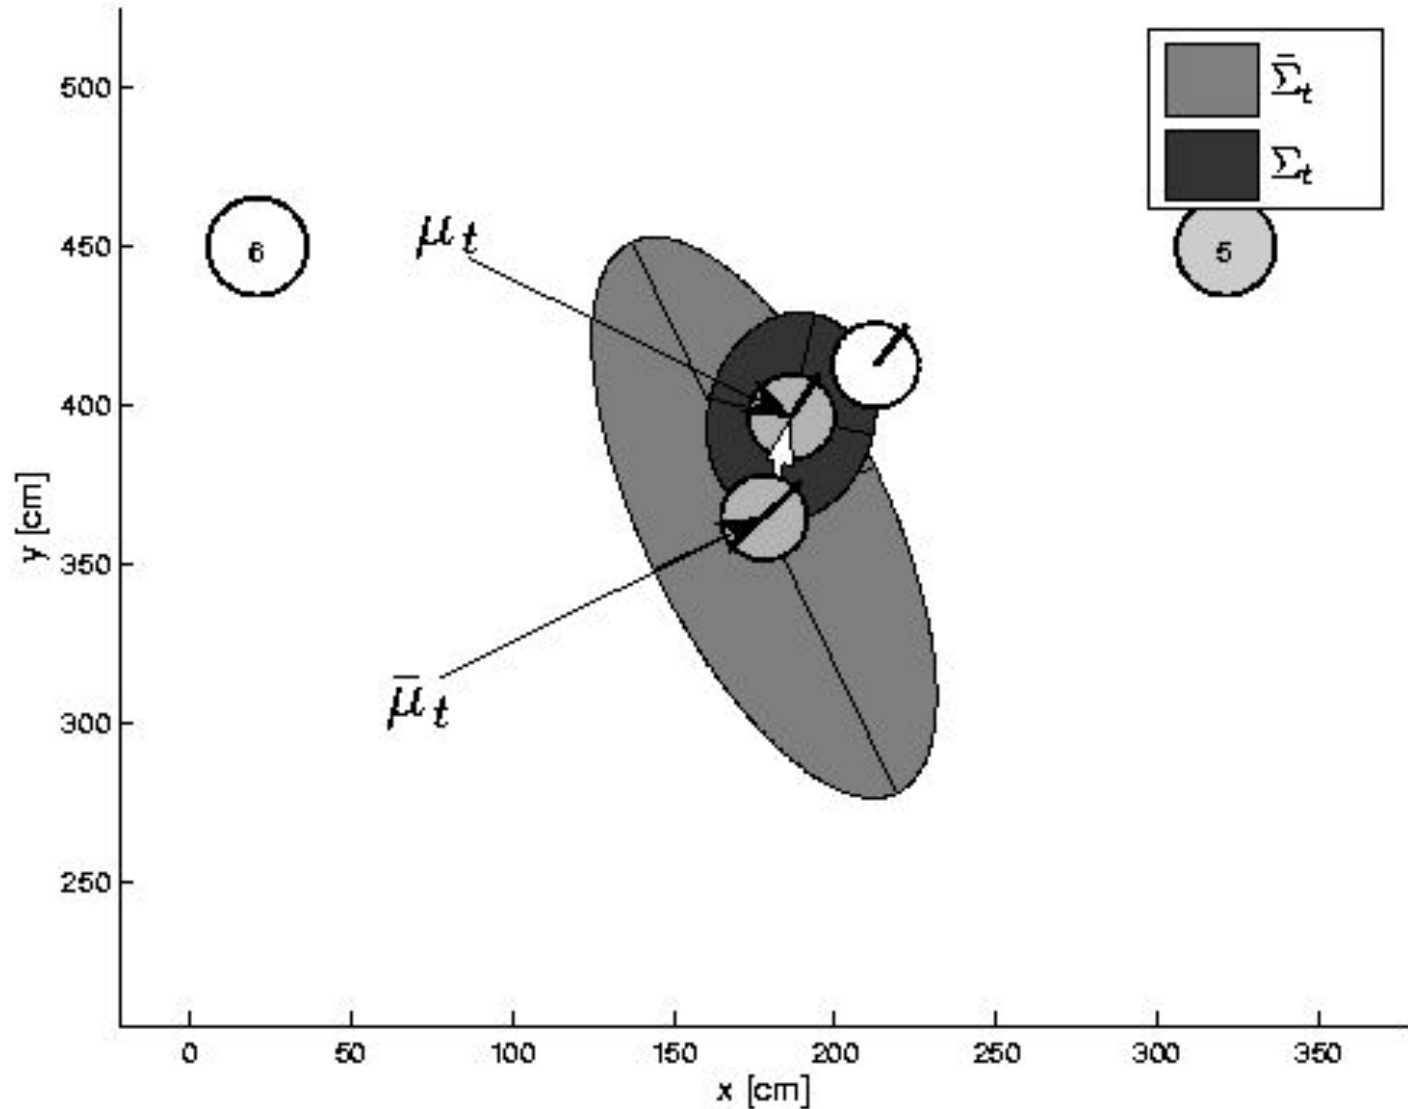

Estimation Sequence (1)

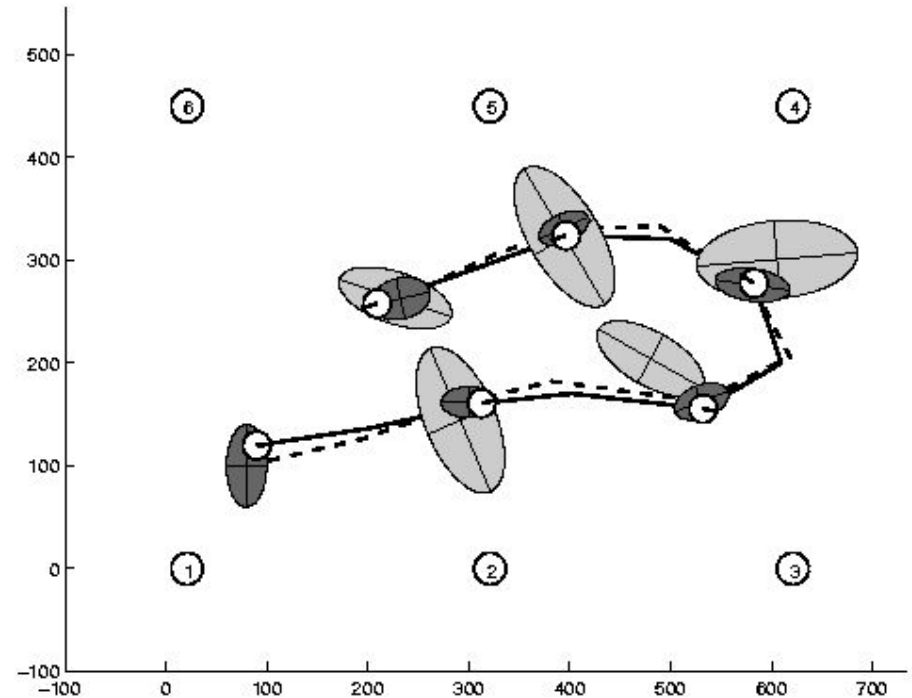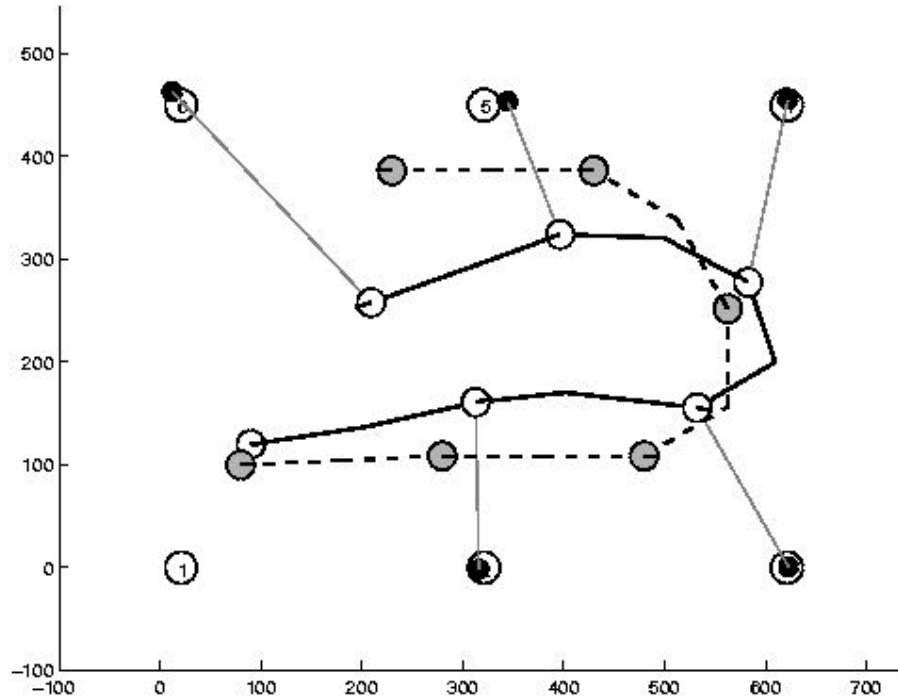

Estimation Sequence (2)

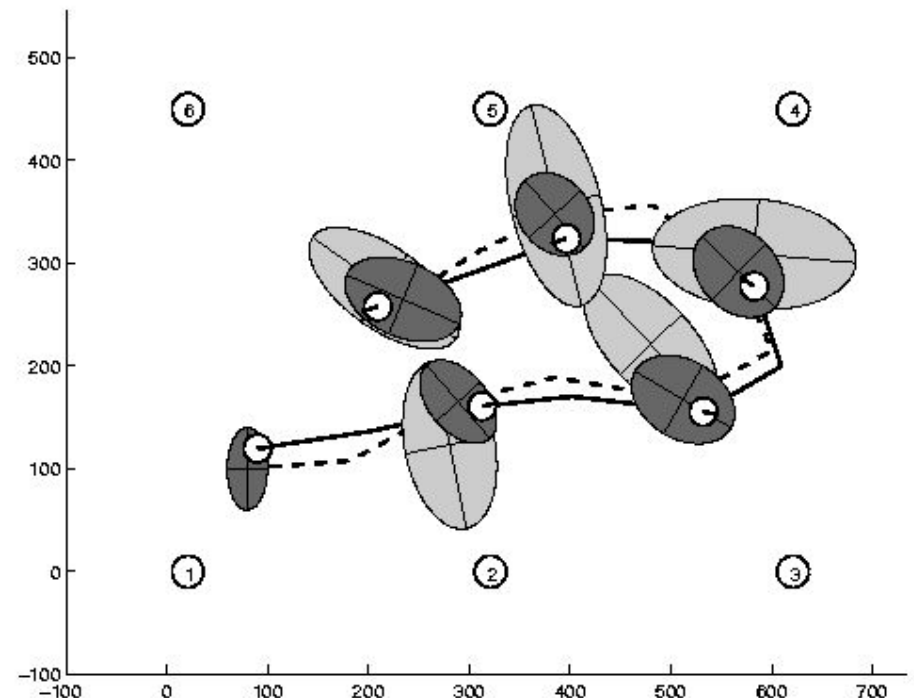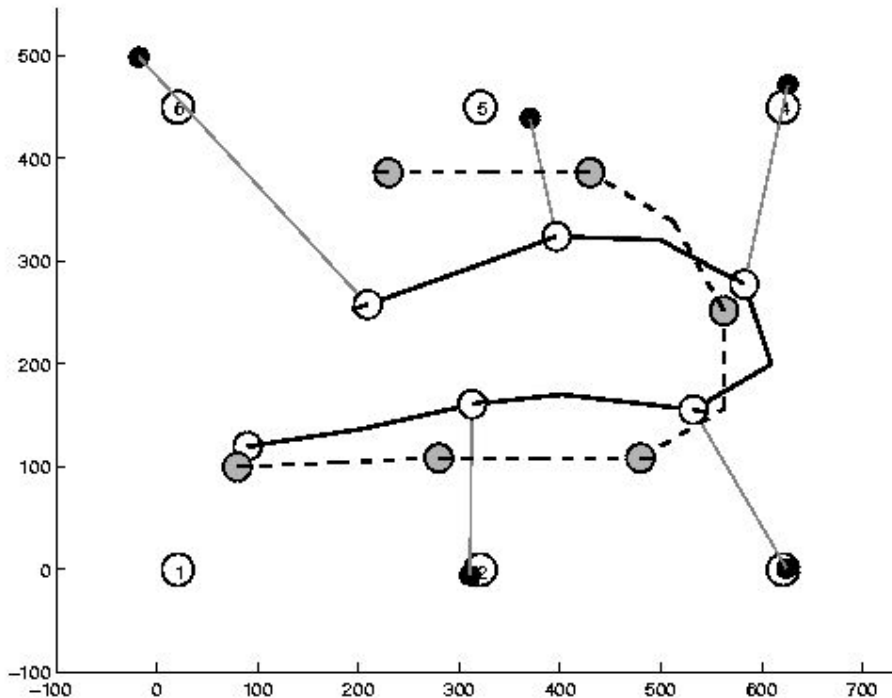

EKF Summary

- **Highly efficient**: Polynomial in measurement dimensionality k and state dimensionality n :
$$O(k^{2.376} + n^2)$$
- **Not optimal!**
- Can **diverge** if nonlinearities are large!
- Works surprisingly well even when all assumptions are violated!