

CSE-571 Robotics

Probabilistic Sensor Models

Beam-based
Scan-based
Landmarks

1

$$Bel(x_t) = \eta P(z_t | x_t) \int P(x_t | u_t, x_{t-1}) Bel(x_{t-1}) dx_{t-1}$$

2

Sensors for Mobile Robots

- **Contact sensors:** Bumpers, touch sensors
- **Internal sensors**
 - Accelerometers (spring-mounted masses)
 - Gyroscopes (spinning mass, laser light)
 - Compasses, inclinometers (earth magnetic field, gravity)
 - Encoders, torque
- **Proximity sensors**
 - Sonar (time of flight)
 - Radar (phase and frequency)
 - Laser range-finders (triangulation, tof, phase)
 - Infrared (intensity)
- **Visual sensors:** Cameras, depth cameras
- **Satellite-style sensors:** GPS, MoCap


4/13/21

CSE-571 - Robotics

3

3

Proximity Sensors

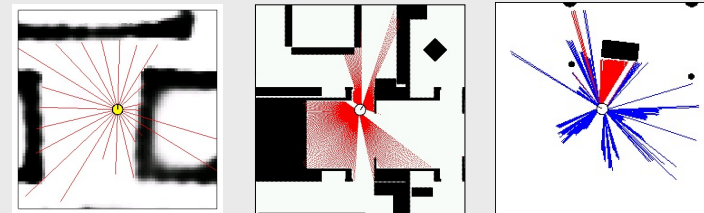

- The central task is to determine $P(z|x)$, i.e. the probability of a measurement z **given** that the robot is at position x .
- **Question:** Where do the probabilities come from?
- **Approach:** Let's try to explain a measurement.

4/13/21

CSE-571 - Robotics

4

4

Beam-based Sensor Model

- Scan z consists of K measurements.

$$z = \{z_1, z_2, \dots, z_K\}$$

4/13/21

CSE-571 - Robotics

5

5

Beam-based Sensor Model

- Scan z consists of K measurements.

$$z = \{z_1, z_2, \dots, z_K\}$$

- Individual measurements are independent given the robot position and a map.

$$P(z | x, m) = \prod_{k=1}^K P(z_k | x, m)$$




4/13/21

CSE-571 - Robotics

6

6

Beam-based Sensor Model



$$P(z | x, m) = \prod_{k=1}^K P(z_k | x, m)$$

4/13/21

CSE-571 - Robotics

7

7

Proximity Measurement

- Measurement can be caused by ...
 - a known obstacle.
 - cross-talk.
 - an unexpected obstacle (people, furniture, ...).
 - missing all obstacles (total reflection, glass, ...).
- Noise is due to uncertainty ...
 - in measuring distance to known obstacle.
 - in position of known obstacles.
 - in position of additional obstacles.
 - whether obstacle is missed.

4/13/21


CSE-571 - Robotics

8

8


Beam-based Proximity Model

Measurement noise

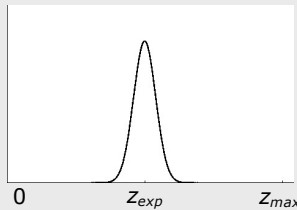

$$P_{hit}(z|x, m) = \eta \frac{1}{\sqrt{2\pi}\sigma^2} e^{-\frac{1}{2} \frac{(z - z_{exp})^2}{\sigma^2}}$$

Unexpected obstacles

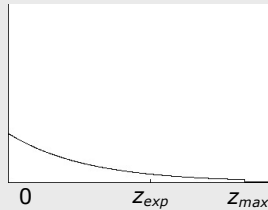

$$P_{unexp}(z|x, m) = \eta \lambda e^{-\lambda z}$$

4/13/21

CSE-571 - Robotics

9

9

Beam-based Proximity Model

Random measurement



$$P_{rand}(z|x, m) = \eta \frac{1}{z_{max}}$$

Max range



$$P_{max}(z|x, m) = \eta \frac{1}{z_{small}}$$


4/13/21

CSE-571 - Robotics

10

10

Mixture Density

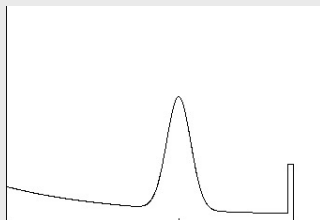

$$P(z|x, m) = \begin{pmatrix} \alpha_{hit} \\ \alpha_{unexp} \\ \alpha_{max} \\ \alpha_{rand} \end{pmatrix}^T \cdot \begin{pmatrix} P_{hit}(z|x, m) \\ P_{unexp}(z|x, m) \\ P_{max}(z|x, m) \\ P_{rand}(z|x, m) \end{pmatrix}$$

How can we determine the model parameters?

4/13/21

CSE-571 - Robotics

11

11

Approximation

- Maximize log likelihood of the data z :

$$P(z|z_{exp})$$
- Search parameter space.
- EM to find mixture parameters
 - Assign measurements to densities.
 - Estimate densities using assignments.
 - Reassign measurements.

4/13/21


CSE-571 - Robotics

12

12

Raw Sensor Data

Measured distances for expected distance of 300 cm.

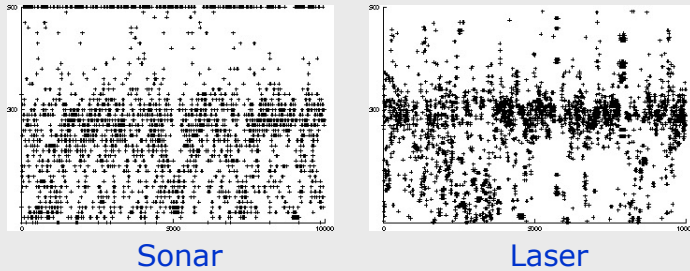


4/13/21

CSE-571 - Robotics

13

13

Approximation Results

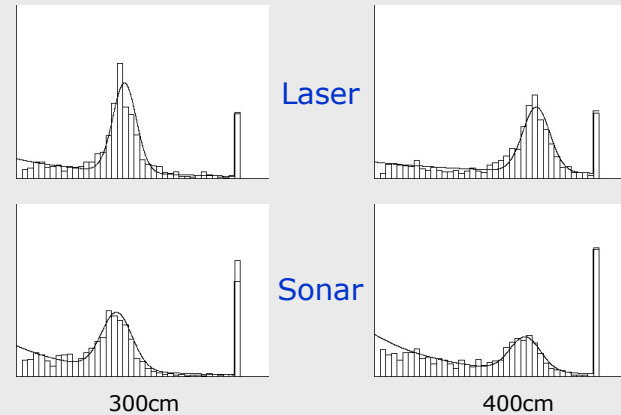


4/13/21

CSE-571 - Robotics

14

14

Example

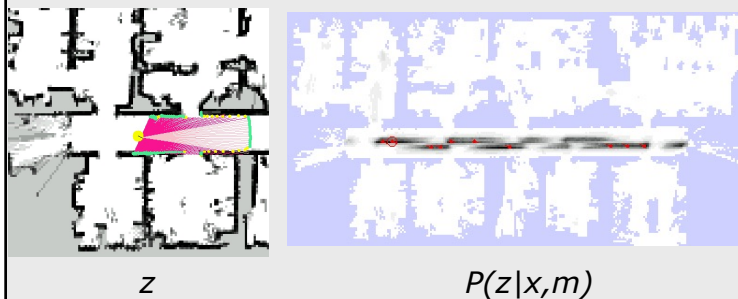

4/13/21

CSE-571 - Robotics

15

15

Summary Beam-based Model

- Assumes independence between beams.
 - Justification?
 - Overconfident!
- Models physical causes for measurements.
 - Mixture of densities for these causes.
- Implementation
 - Learn parameters based on real data.
 - Different models can be learned for different angles at which the sensor beam hits the obstacle.
 - Determine expected distances by ray-tracing.
 - Expected distances can be pre-processed.

4/13/21

CSE-571 - Robotics

16

16

Scan-based Model

- Beam-based model is ...
 - not smooth for small obstacles and at edges
 - not very efficient.

- **Idea:** Instead of following along the beam, just check the end point.

4/13/21

CSE-571 - Robotics

17

17

Scan-based Model

- Probability is a mixture of ...
 - a Gaussian distribution with mean at **distance to closest obstacle**,
 - a uniform distribution for random measurements, and
 - a small uniform distribution for max range measurements.
- Again, independence between different components is assumed.


4/13/21

CSE-571 - Robotics


18

18

Example



Map m



Likelihood field

$$P(z|x, m)$$



4/13/21

CSE-571 - Robotics


19

19

San Jose Tech Museum



Occupancy grid map



Likelihood field

4/13/21


CSE-571 - Robotics

20

20

Scan Matching

- Extract likelihood field from scan and use it to match different scan.

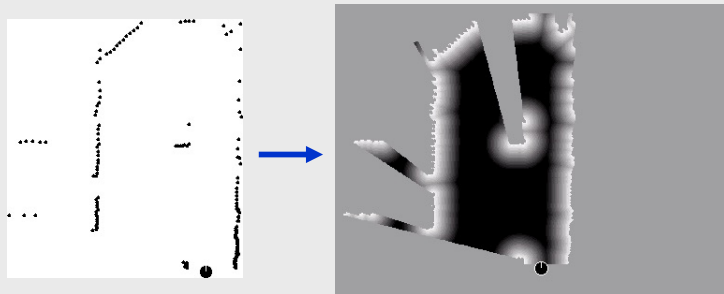

4/13/21


CSE-571 - Robotics

21

21

Scan Matching

- Extract likelihood field from first scan and use it to match second scan.

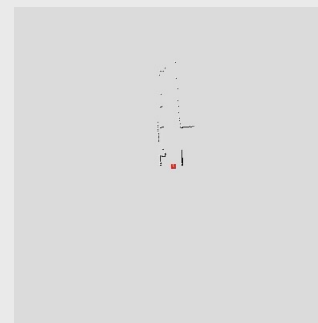

~0.01 sec

4/13/21

CSE-571 - Robotics

22

22

Properties of Scan-based Model

- Highly efficient, uses 2D tables only.
- Smooth w.r.t. to small changes in robot position.
- Allows gradient descent, scan matching.
- Ignores physical properties of beams.
- Works for sonars?

4/13/21

CSE-571 - Robotics

23

23

Additional Models of Proximity Sensors

- **Map matching (sonar, laser)**: generate small, local maps from sensor data and match local maps against global model.
- **Scan matching (laser)**: map is represented by scan endpoints, match scan into this map using ICP, correlation.
- **Features (sonar, laser, vision)**: Extract features such as doors, hallways from sensor data.

4/13/21

CSE-571 - Robotics

24

24

Landmarks

- Active beacons (e.g. radio, GPS)
- Passive (e.g. visual, retro-reflective)
- Standard approach is **triangulation**
- Sensor provides
 - distance, or
 - bearing, or
 - distance and bearing.

4/13/21

CSE-571 - Robotics

25

25

Distance and Bearing



4/13/21

CSE-571 - Robotics

26

26

Probabilistic Model

1. Algorithm **landmark_detection_model**(z, x, m):
 $z = \langle i, d, \alpha \rangle, x = \langle x, y, \theta \rangle$
2. $\hat{d} = \sqrt{(m_x(i) - x)^2 + (m_y(i) - y)^2}$
3. $\hat{\alpha} = \text{atan2}(m_y(i) - y, m_x(i) - x) - \theta$
4. $p_{\text{det}} = \text{prob}(\hat{d} - d, \varepsilon_d) \cdot \text{prob}(\hat{\alpha} - \alpha, \varepsilon_\alpha)$
5. Return $z_{\text{det}} p_{\text{det}} + z_{\text{fp}} p_{\text{uniform}}(z | x, m)$





4/13/21

CSE-571 - Robotics

27

27

Distributions for $P(z|x)$



4/13/21

CSE-571 - Robotics

28

28

Summary of Parametric Motion and Sensor Models

- Explicitly modeling uncertainty in motion and sensing is key to robustness.
- In many cases, good models can be found by the following approach:
 1. Determine parametric model of noise free motion or measurement.
 2. Analyze sources of noise.
 3. Add adequate noise to parameters (eventually mix in densities for noise).
 4. Learn (and verify) parameters by fitting model to data.
 5. Likelihood of measurement is given by “probabilistically comparing” the actual with the expected measurement.
- It is extremely important to be aware of the underlying assumptions!

4/13/21

CSE-571 - Robotics

29