

CSE-571 Robotics

Kalman Filters

Dieter Fox

1

Bayes Filter Reminder

- Prediction

$$\overline{bel}(x_t) = \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1}$$


- Correction

$$bel(x_t) = \eta p(z_t | x_t) \overline{bel}(x_t)$$

3

Properties of Gaussians


$$\left. \begin{array}{l} X \sim N(\mu, \sigma^2) \\ Y = aX + b \end{array} \right\} \Rightarrow Y \sim N(a\mu + b, a^2\sigma^2)$$

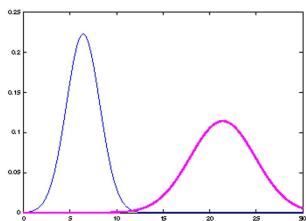


5

Properties of Gaussians

$$\left. \begin{array}{l} X_1 \sim N(\mu_1, \sigma_1^2) \\ X_2 \sim N(\mu_2, \sigma_2^2) \end{array} \right\} \Rightarrow p(X_1) \cdot p(X_2) \sim N\left(\frac{\sigma_2^2}{\sigma_1^2 + \sigma_2^2} \mu_1 + \frac{\sigma_1^2}{\sigma_1^2 + \sigma_2^2} \mu_2, \frac{1}{\sigma_1^2 + \sigma_2^2}\right)$$

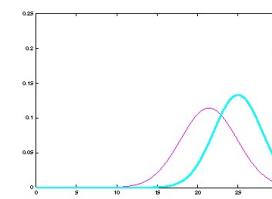


6

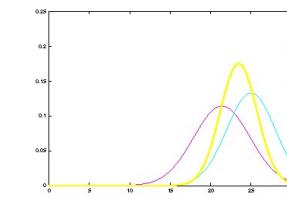

1

Properties of Gaussians

$$\begin{aligned} X_1 \sim N(\mu_1, \sigma_1^2) \\ X_2 \sim N(\mu_2, \sigma_2^2) \end{aligned} \Rightarrow p(X_1) \cdot p(X_2) \sim N\left(\frac{\sigma_2^2}{\sigma_1^2 + \sigma_2^2} \mu_1 + \frac{\sigma_1^2}{\sigma_1^2 + \sigma_2^2} \mu_2, \frac{1}{\sigma_1^{-2} + \sigma_2^{-2}}\right)$$

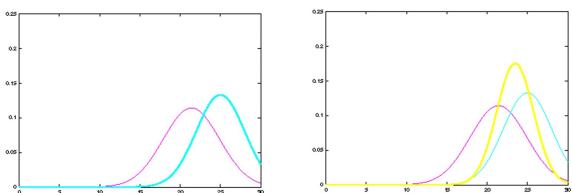

7

Multivariate Gaussians

$$\begin{aligned} X \sim N(\mu, \Sigma) \\ Y = AX + B \end{aligned} \Rightarrow Y \sim N(A\mu + B, A\Sigma A^T)$$

$$\begin{aligned} X_1 \sim N(\mu_1, \Sigma_1) \\ X_2 \sim N(\mu_2, \Sigma_2) \end{aligned} \Rightarrow p(X_1) \cdot p(X_2) \sim N\left(\frac{\Sigma_2}{\Sigma_1 + \Sigma_2} \mu_1 + \frac{\Sigma_1}{\Sigma_1 + \Sigma_2} \mu_2, \frac{1}{\Sigma_1^{-1} + \Sigma_2^{-1}}\right)$$

- Marginalization and conditioning in Gaussians results in Gaussians
- We stay in the “Gaussian world” as long as we start with Gaussians and perform only linear transformations.

9

Discrete Kalman Filter

Estimates the state x of a discrete-time controlled process that is governed by the linear stochastic difference equation

$$x_t = A_t x_{t-1} + B_t u_t + \varepsilon_t$$

with a measurement

$$z_t = C_t x_t + \delta_t$$

10

11


Components of a Kalman Filter

- A_t Matrix ($n \times n$) that describes how the state evolves from $t-1$ to t without controls or noise.
- B_t Matrix ($n \times l$) that describes how the control u_t changes the state from t to $t-1$.
- C_t Matrix ($k \times n$) that describes how to map the state x_t to an observation z_t .
- ε_t Random variables representing the process and measurement noise that are assumed to be independent and normally distributed with covariance R_t and Q_t respectively.
- δ_t

12

2


Kalman Filter Updates in 1D

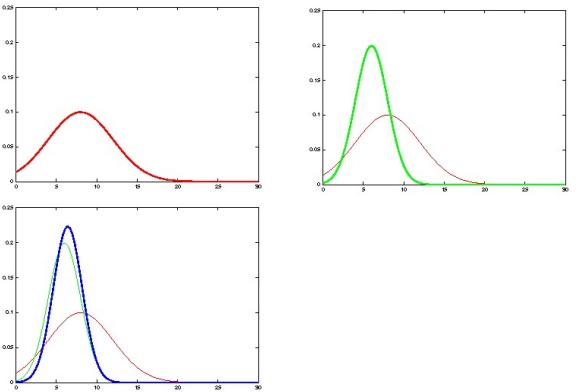

13

Kalman Filter Updates in 1D


$$\begin{aligned} bel(x_t) &= \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - \bar{\mu}_t) \\ \sigma_t^2 = (1 - K_t)\bar{\sigma}_t^2 \end{cases} \quad \text{with } K_t = \frac{\bar{\sigma}_t^2}{\bar{\sigma}_t^2 + \sigma_{obs,t}^2} \\ bel(x_t) &= \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - C_t \bar{\mu}_t) \\ \Sigma_t = (I - K_t C_t) \bar{\Sigma}_t \end{cases} \quad \text{with } K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1} \end{aligned}$$

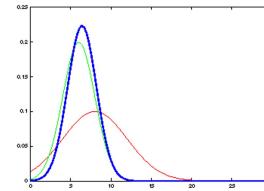

14


Kalman Filter Updates in 1D

$$\begin{aligned} \overline{bel}(x_t) &= \begin{cases} \bar{\mu}_t = a_t \mu_{t-1} + b_t u_t \\ \bar{\sigma}_t^2 = a_t^2 \sigma_t^2 + \sigma_{act,t}^2 \end{cases} \\ \overline{bel}(x_t) &= \begin{cases} \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t \\ \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t \end{cases} \end{aligned}$$

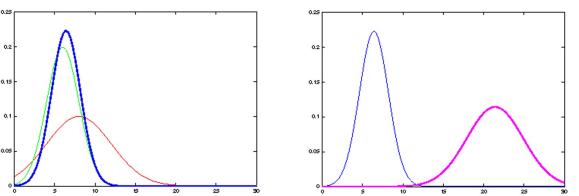

17

Kalman Filter Updates

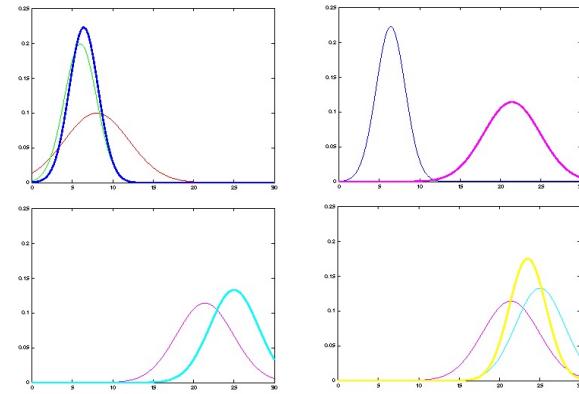

18

Linear Gaussian Systems: Initialization

- Initial belief is normally distributed:

$$bel(x_0) = N(x_0; \mu_0, \Sigma_0)$$

20

Linear Gaussian Systems: Dynamics

- Dynamics are linear function of state and control plus additive noise:

$$x_t = A_t x_{t-1} + B_t u_t + \varepsilon_t$$

$$p(x_t | u_t, x_{t-1}) = N(x_t; A_t x_{t-1} + B_t u_t, R_t)$$

$$\begin{aligned} \overline{bel}(x_t) &= \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1} \\ &\quad \Downarrow \\ &\sim N(x_t; A_t x_{t-1} + B_t u_t, R_t) \end{aligned}$$

$$\Downarrow \quad \Downarrow$$

$$\sim N(x_t; A_t x_{t-1} + B_t u_t, R_t) \sim N(x_{t-1}; \mu_{t-1}, \Sigma_{t-1})$$

22

Linear Gaussian Systems: Dynamics

$$\begin{aligned} \overline{bel}(x_t) &= \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1} \\ &\quad \Downarrow \quad \Downarrow \\ &\sim N(x_t; A_t x_{t-1} + B_t u_t, R_t) \sim N(x_{t-1}; \mu_{t-1}, \Sigma_{t-1}) \\ &\quad \Downarrow \\ \overline{bel}(x_t) &= \eta \int \exp \left\{ -\frac{1}{2} (x_t - A_t x_{t-1} - B_t u_t)^T R_t^{-1} (x_t - A_t x_{t-1} - B_t u_t) \right\} \\ &\quad \exp \left\{ -\frac{1}{2} (x_{t-1} - \mu_{t-1})^T \Sigma_{t-1}^{-1} (x_{t-1} - \mu_{t-1}) \right\} dx_{t-1} \\ \overline{bel}(x_t) &= \begin{cases} \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t \\ \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t \end{cases} \end{aligned}$$

24

Linear Gaussian Systems: Observations

- Observations are linear function of state plus additive noise:

$$z_t = C_t x_t + \delta_t$$

$$p(z_t | x_t) = N(z_t; C_t x_t, Q_t)$$

$$\begin{aligned} \overline{bel}(x_t) &= \eta p(z_t | x_t) \overline{bel}(x_t) \\ &\quad \Downarrow \quad \Downarrow \\ &\sim N(z_t; C_t x_t, Q_t) \sim N(x_t; \bar{\mu}_t, \bar{\Sigma}_t) \end{aligned}$$

26

Linear Gaussian Systems: Observations

$$\begin{aligned}
 bel(x_t) &= \eta p(z_t | x_t) & \bar{bel}(x_t) \\
 &\quad \Downarrow & \Downarrow \\
 &\sim N(z_t; C_t x_t, Q_t) & \sim N(\bar{x}_t; \bar{\mu}_t, \bar{\Sigma}_t) \\
 &\quad \Downarrow \\
 bel(x_t) &= \eta \exp\left\{-\frac{1}{2}(z_t - C_t x_t)^T Q_t^{-1} (z_t - C_t x_t)\right\} \exp\left\{-\frac{1}{2}(x_t - \bar{\mu}_t)^T \bar{\Sigma}_t^{-1} (x_t - \bar{\mu}_t)\right\} \\
 bel(x_t) &= \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - C_t \bar{\mu}_t) \\ \Sigma_t = (I - K_t C_t) \bar{\Sigma}_t \end{cases} \quad \text{with} \quad K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}
 \end{aligned}$$

28

Kalman Filter Algorithm

1. Algorithm **Kalman_filter**($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$):
2. Prediction:
3. $\bar{\mu}_t = A_t \mu_{t-1} + B_t u_t$
4. $\bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t$
5. Correction:
6. $K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}$
7. $\mu_t = \bar{\mu}_t + K_t(z_t - C_t \bar{\mu}_t)$
8. $\Sigma_t = (I - K_t C_t) \bar{\Sigma}_t$
9. Return μ_t, Σ_t

30

Kalman Filter Summary

- Highly efficient: Polynomial in measurement dimensionality k and state dimensionality n : $O(k^{2.376} + n^2)$
- Optimal for linear Gaussian systems!
- Most robotics systems are nonlinear!

31

Going non-linear

EXTENDED KALMAN FILTER

32

Nonlinear Dynamic Systems


- Most realistic robotic problems involve nonlinear functions

$$x_t = g(u_t, x_{t-1})$$

$$z_t = h(x_t)$$


33

Linearity Assumption Revisited

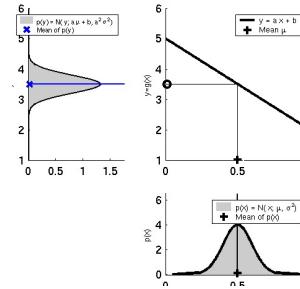


34

Non-linear Function

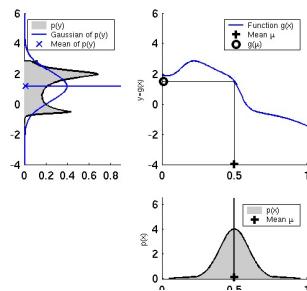


35

EKF Linearization (1)

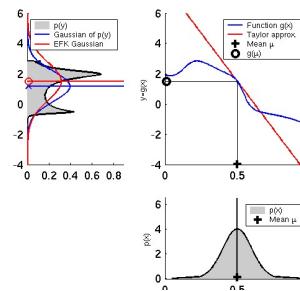


36

EKF Linearization (2)

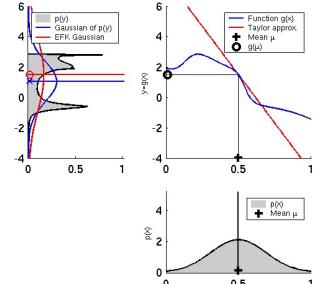

37

EKF Linearization (3)

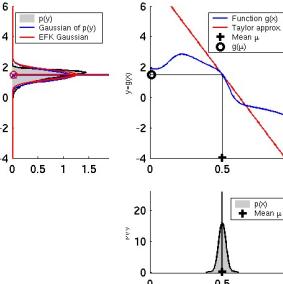

38

EKF Linearization: First Order Taylor Series Expansion

- Prediction:

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}} (x_{t-1} - \mu_{t-1})$$

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + G_t (x_{t-1} - \mu_{t-1})$$

- Correction:

$$h(x_t) \approx h(\bar{\mu}_t) + \frac{\partial h(\bar{\mu}_t)}{\partial x_t} (x_t - \bar{\mu}_t)$$

$$h(x_t) \approx h(\bar{\mu}_t) + H_t (x_t - \bar{\mu}_t)$$

40

EKF Algorithm

- Extended_Kalman_filter($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$):**
 - Prediction:**
 - $\bar{\mu}_t = g(u_t, \mu_{t-1})$
 - $\bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + R_t$
 - Correction:**
 - $K_t = \bar{\Sigma}_t H_t^T (H_t \bar{\Sigma}_t H_t^T + Q_t)^{-1}$
 - $\mu_t = \bar{\mu}_t + K_t (z_t - h(\bar{\mu}_t))$
 - $\Sigma_t = (I - K_t H_t) \bar{\Sigma}_t$
 - Return** μ_t, Σ_t
- $$H_t = \frac{\partial h(\bar{\mu}_t)}{\partial x_t} \quad G_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}}$$

42

Localization

"Using sensory information to locate the robot in its environment is the most fundamental problem to providing a mobile robot with autonomous capabilities." [Cox '91]

- **Given**
 - Map of the environment.
 - Sequence of sensor measurements.
- **Wanted**
 - Estimate of the robot's position.
- **Problem classes**
 - Position tracking
 - Global localization
 - Kidnapped robot problem (recovery)

43

Landmark-based Localization



44

1. EKF_localization ($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$):

Prediction:

$$3. G_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}} = \begin{pmatrix} \frac{\partial x'}{\partial \mu_{t-1,x}} & \frac{\partial x'}{\partial \mu_{t-1,y}} & \frac{\partial x'}{\partial \mu_{t-1,\theta}} \\ \frac{\partial y'}{\partial \mu_{t-1,x}} & \frac{\partial y'}{\partial \mu_{t-1,y}} & \frac{\partial y'}{\partial \mu_{t-1,\theta}} \\ \frac{\partial \theta'}{\partial \mu_{t-1,x}} & \frac{\partial \theta'}{\partial \mu_{t-1,y}} & \frac{\partial \theta'}{\partial \mu_{t-1,\theta}} \end{pmatrix} \text{ Jacobian of } g \text{ w.r.t location}$$

$$5. V_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial u_t} = \begin{pmatrix} \frac{\partial x'}{\partial v_t} & \frac{\partial x'}{\partial \omega_t} \\ \frac{\partial y'}{\partial v_t} & \frac{\partial y'}{\partial \omega_t} \\ \frac{\partial \theta'}{\partial v_t} & \frac{\partial \theta'}{\partial \omega_t} \end{pmatrix} \text{ Jacobian of } g \text{ w.r.t control}$$

$$6. M_t = \begin{pmatrix} \alpha_1 v_t^2 + \alpha_3 \omega_t^2 & 0 \\ 0 & \alpha_3 v_t^2 + \alpha_4 \omega_t^2 \end{pmatrix} \text{ Motion noise}$$

$$7. \bar{\mu}_t = g(u_t, \mu_{t-1}) \quad \text{Predicted mean}$$

$$8. \bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + V_t M_t V_t^T \quad \text{Predicted covariance}$$

45

1. EKF_localization ($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$):

Prediction:

$$\theta = \mu_{t-1,\theta} \quad G_t = \begin{pmatrix} 1 & 0 & -\frac{v_t}{\omega_t} \cos \theta + \frac{v_t}{\omega_t} \cos(\theta + \omega_t \Delta t) \\ 0 & 1 & -\frac{v_t}{\omega_t} \sin \theta + \frac{v_t}{\omega_t} \sin(\theta + \omega_t \Delta t) \\ 0 & 0 & 1 \end{pmatrix}$$

$$V_t = \begin{pmatrix} -\frac{\sin \theta + \sin(\theta + \omega_t \Delta t)}{\omega_t} & \frac{v_t (\sin \theta - \sin(\theta + \omega_t \Delta t))}{\omega_t^2} + \frac{v_t \cos(\theta + \omega_t \Delta t) \Delta t}{\omega_t} \\ \frac{\cos \theta - \cos(\theta + \omega_t \Delta t)}{\omega_t} & -\frac{v_t (\cos \theta - \cos(\theta + \omega_t \Delta t))}{\omega_t^2} + \frac{v_t \sin(\theta + \omega_t \Delta t) \Delta t}{\omega_t} \\ 0 & \Delta t \end{pmatrix}$$



$$M_t = \begin{pmatrix} \alpha_1 v_t^2 + \alpha_2 \omega_t^2 & 0 \\ 0 & \alpha_3 v_t^2 + \alpha_4 \omega_t^2 \end{pmatrix}$$

$$\bar{\mu}_t = \mu_{t-1} + \begin{pmatrix} -\frac{v_t}{\omega_t} \sin \theta + \frac{v_t}{\omega_t} \sin(\theta + \omega_t \Delta t) \\ \frac{v_t}{\omega_t} \cos \theta - \frac{v_t}{\omega_t} \cos(\theta + \omega_t \Delta t) \\ \omega_t \Delta t \end{pmatrix}$$

$$8. \bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + V_t M_t V_t^T \quad \text{Predicted covariance}$$

46

EKF Prediction Step

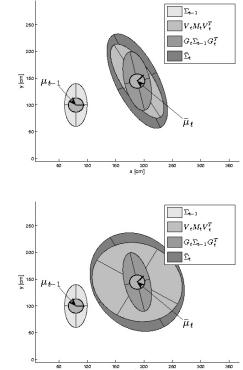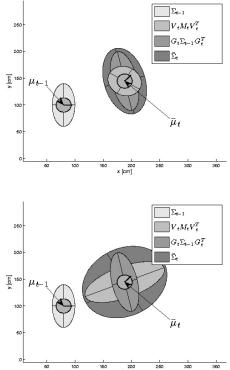

47

1. EKF_localization ($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$)

Correction:

$$3. \quad \hat{z}_t = \begin{pmatrix} \sqrt{(m_x - \bar{\mu}_{t,x})^2 + (m_y - \bar{\mu}_{t,y})^2} \\ \text{atan } 2(m_y - \bar{\mu}_{t,y}, m_x - \bar{\mu}_{t,x}) - \bar{\mu}_{t,\theta} \end{pmatrix} \quad \text{Predicted measurement mean}$$

$$5. \quad H_t = \frac{\partial h(\bar{\mu}_t, m)}{\partial x_i} = \begin{pmatrix} \frac{\partial r_e}{\partial \bar{\mu}_{t,x}} & \frac{\partial r_e}{\partial \bar{\mu}_{t,y}} & \frac{\partial r_e}{\partial \bar{\mu}_{t,\theta}} \\ \frac{\partial \phi_e}{\partial \bar{\mu}_{t,x}} & \frac{\partial \phi_e}{\partial \bar{\mu}_{t,y}} & \frac{\partial \phi_e}{\partial \bar{\mu}_{t,\theta}} \end{pmatrix} \quad \text{Jacobian of } h \text{ w.r.t location}$$

$$6. \quad Q_t = \begin{pmatrix} \sigma_r^2 & 0 \\ 0 & \sigma_\phi^2 \end{pmatrix} \quad \text{Pred. measurement covariance}$$

$$7. \quad S_t = H_t \bar{\Sigma}_t H_t^T + Q_t \quad \text{Kalman gain}$$



$$8. \quad K_t = \bar{\Sigma}_t H_t^T S_t^{-1} \quad \text{Updated mean}$$

$$9. \quad \mu_t = \bar{\mu}_t + K_t(z_t - \hat{z}_t) \quad \text{Updated covariance}$$

$$10. \quad \Sigma_t = (I - K_t H_t) \bar{\Sigma}_t$$



48

EKF Observation Prediction Step

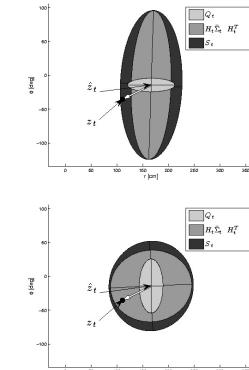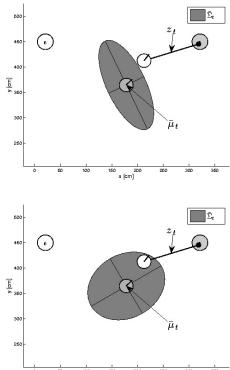


49

EKF Correction Step

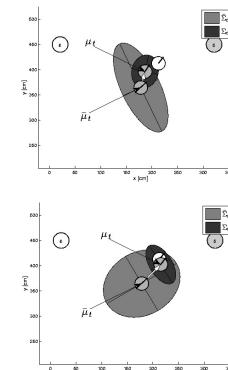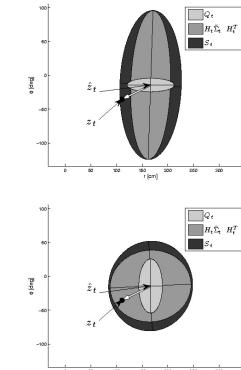


50

Estimation Sequence (1)

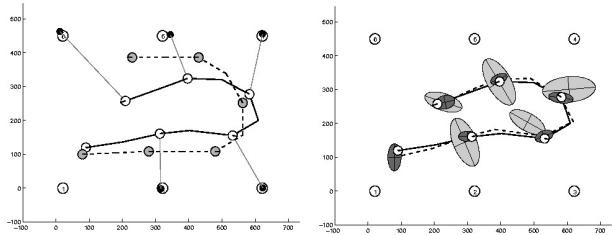


51

Estimation Sequence (2)

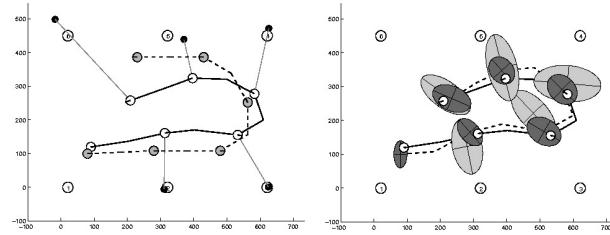

52

Comparison to GroundTruth

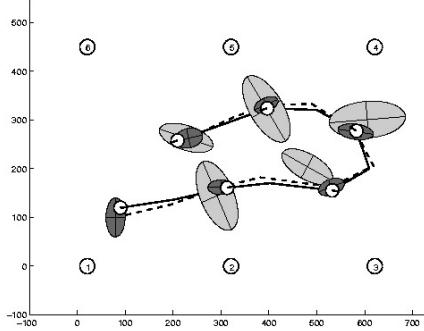

53

EKF Summary

- Highly efficient: Polynomial in measurement dimensionality k and state dimensionality n :
 $O(k^{2.376} + n^2)$
- Not optimal!
- Can diverge if nonlinearities are large!
- Works surprisingly well even when all assumptions are violated!


54

Going unscented

UNSCENTED KALMAN FILTER


55

Linearization via Unscented Transform

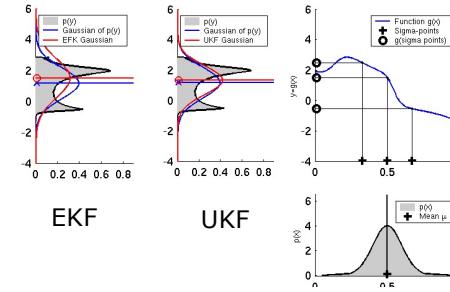


56

UKF Sigma-Point Estimate (2)

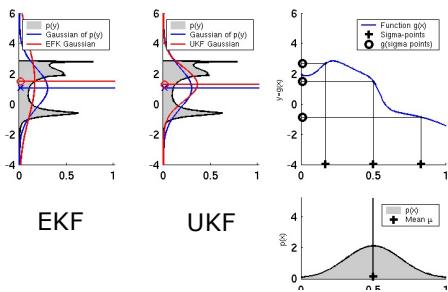

57

UKF Sigma-Point Estimate (3)

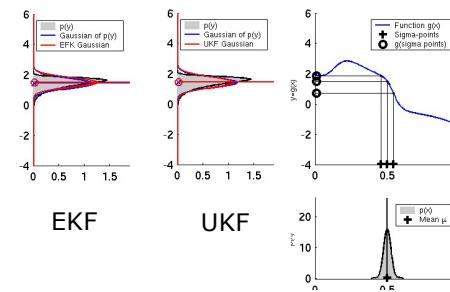

58

Unscented Transform

Sigma points

$$\begin{aligned}\chi^0 &= \mu \\ \chi^i &= \mu \pm \left(\sqrt{(n+\lambda)\Sigma} \right) \\ w_m^0 &= \frac{\lambda}{n+\lambda} \quad w_c^0 = \frac{\lambda}{n+\lambda} + (1-\alpha^2 + \beta) \\ w_m^i &= w_c^i = \frac{1}{2(n+\lambda)} \quad \text{for } i=1,\dots,2n\end{aligned}$$

Pass sigma points through nonlinear function


$$\psi^i = g(\chi^i)$$

Recover mean and covariance

$$\begin{aligned}\mu &= \sum_{i=0}^{2n} w_m^i \psi^i \\ \Sigma &= \sum_{i=0}^{2n} w_c^i (\psi^i - \mu)(\psi^i - \mu)^T\end{aligned}$$


59

UKF Prediction Step

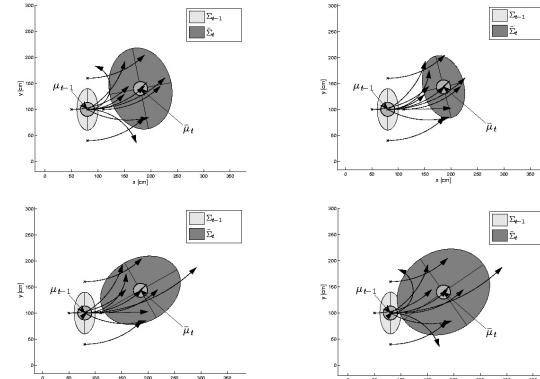


60

UKF Observation Prediction Step

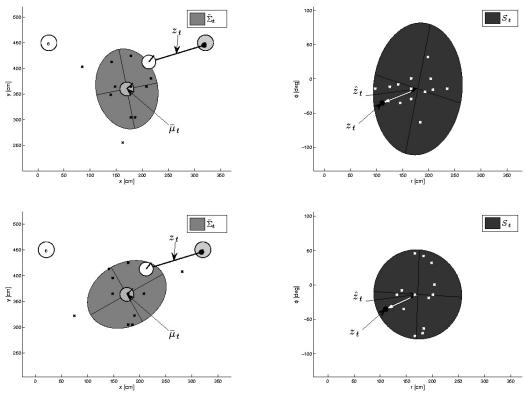

61

UKF Correction Step

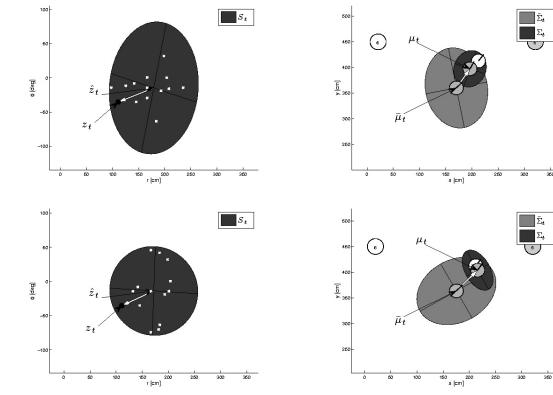

62

12

UKF_predict ($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$):

Prediction:

$$M_t = \begin{pmatrix} (\alpha_1 |v_t| + \alpha_2 |o_t|)^2 & 0 \\ 0 & (\alpha_3 |v_t| + \alpha_4 |o_t|)^2 \end{pmatrix} \quad \text{Motion noise}$$

$$Q_t = \begin{pmatrix} \sigma_v^2 & 0 \\ 0 & \sigma_o^2 \end{pmatrix} \quad \text{Measurement noise}$$

$$\mu_t^a = \begin{pmatrix} \mu_{t-1}^T & (0\ 0)^T & (0\ 0)^T \end{pmatrix}^T \quad \text{Augmented state mean}$$

$$\Sigma_t^a = \begin{pmatrix} \Sigma_{t-1} & 0 & 0 \\ 0 & M_t & 0 \\ 0 & 0 & Q_t \end{pmatrix} \quad \text{Augmented covariance}$$

$$\chi_{t-1}^a = \left(\mu_{t-1}^a, \mu_{t-1}^a + \gamma \sqrt{\Sigma_{t-1}^a}, \mu_{t-1}^a - \gamma \sqrt{\Sigma_{t-1}^a} \right) \quad \text{Sigma points}$$

$$\bar{\chi}_t^x = g(u_t + \chi_t^u, \chi_t^x) \quad \text{Prediction of sigma points}$$

$$\bar{\mu}_t = \sum_{i=0}^{2L} w_m^i \bar{\chi}_{i,t}^x \quad \text{Predicted mean}$$

$$\bar{\Sigma}_t = \sum_{i=0}^{2L} w_c^i (\bar{\chi}_{i,t}^x - \bar{\mu}_t)(\bar{\chi}_{i,t}^x - \bar{\mu}_t)^T \quad \text{Predicted covariance}$$

UKF_correct ($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$):

Correction:

$$\bar{Z}_t = h(\bar{\chi}_t^x) + \chi_t^z \quad \text{Measurement sigma points}$$

$$\hat{z}_t = \sum_{i=0}^{2L} w_m^i \bar{Z}_{i,t} \quad \text{Predicted measurement mean}$$

$$S_t = \sum_{i=0}^{2L} w_c^i (\bar{Z}_{i,t} - \hat{z}_t)(\bar{Z}_{i,t} - \hat{z}_t)^T \quad \text{Pred. measurement covariance}$$

$$\Sigma_t^{x,z} = \sum_{i=0}^{2L} w_c^i (\bar{\chi}_{i,t}^x - \bar{\mu}_t)(\bar{Z}_{i,t} - \hat{z}_t)^T \quad \text{Cross-covariance}$$

$$K_t = \Sigma_t^{x,z} S_t^{-1} \quad \text{Kalman gain}$$


$$\mu_t = \bar{\mu}_t + K_t(z_t - \hat{z}_t) \quad \text{Updated mean}$$

$$\Sigma_t = \bar{\Sigma}_t - K_t S_t K_t^T \quad \text{Updated covariance}$$

63

64

Estimation Sequence

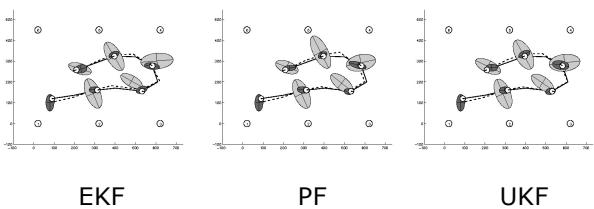


EKF

PF

UKF

Estimation Sequence

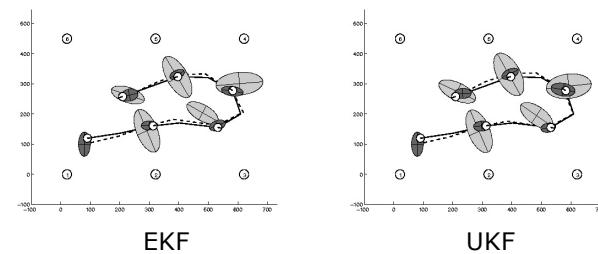

EKF


UKF

65

66

13

Prediction Quality

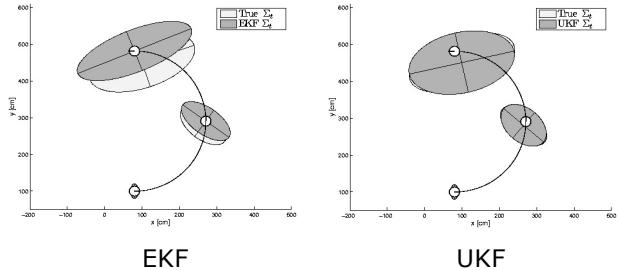

67

UKF Summary


- **Highly efficient:** Same complexity as EKF, with a constant factor slower in typical practical applications
- **Better linearization than EKF:** Accurate in first two terms of Taylor expansion (EKF only first term)
- **Derivative-free:** No Jacobians needed
- **Still not optimal!**

68

68

Kalman Filter-based System


- [Arras et al. 98]:
 - Laser range-finder and vision
 - High precision (<1cm accuracy)

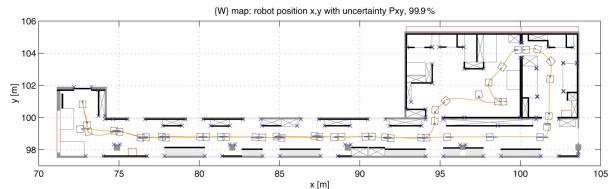

Courtesy of K. Arras

69

Multi-hypothesis Tracking

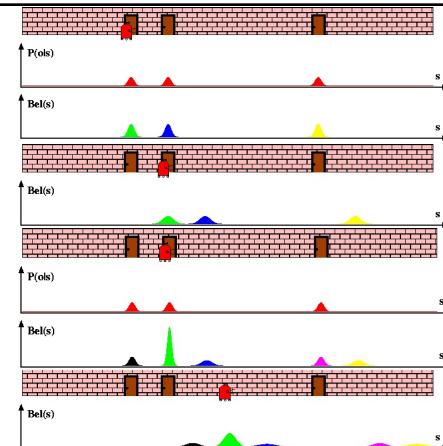

70

14

Localization With MHT

- Belief is represented by multiple hypotheses
- Each hypothesis is tracked by a Kalman filter
- **Additional problems:**
 - **Data association:** Which observation corresponds to which hypothesis?
 - **Hypothesis management:** When to add / delete hypotheses?
- Huge body of literature on target tracking, motion correspondence etc.

71

MHT: Implemented System (1)

- Hypotheses are extracted from LRF scans
- Each hypothesis has probability of being the correct one:

$$H_i = \{\hat{x}_i, \Sigma_i, P(H_i)\}$$
- Hypothesis probability is computed using Bayes' rule


$$P(H_i | s) = \frac{P(s | H_i)P(H_i)}{P(s)}$$
- Hypotheses with low probability are deleted.
- New candidates are extracted from LRF scans.

$$C_j = \{z_j, R_j\}$$

[Jensfelt et al. '00]

72


MHT: Implemented System (2)

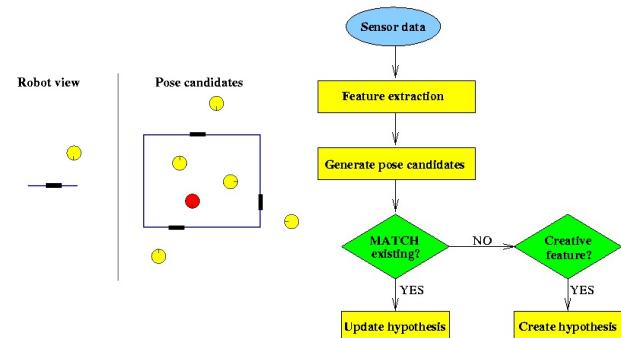

Courtesy of P. Jensfelt and S. Kristensen

73

MHT: Implemented System (3) Example run

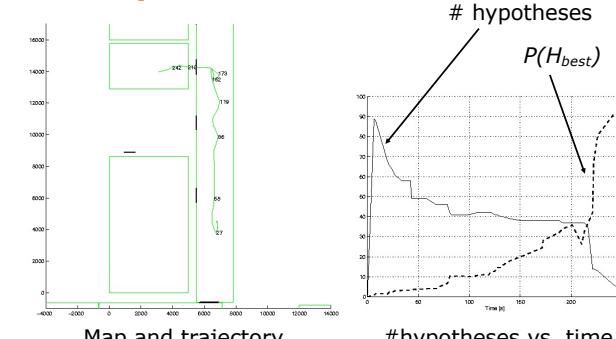

Courtesy of P. Jensfelt and S. Kristensen

74

15