

# **CSE 451: Operating Systems**

## **Autumn 2005**

### **Secondary Storage**

**Hank Levy**

# Secondary storage

- Secondary storage typically:
  - is anything that is outside of “primary memory”
  - does not permit direct execution of instructions or data retrieval via machine load/store instructions
- Characteristics:
  - it's large: 30-250GB
  - it's cheap: \$1/GB
  - it's persistent: data survives power loss
  - it's slow: milliseconds to access
    - why is this slow??

# Another trip down memory lane ...




IBM 2314

About the size of  
6 refrigerators  
8 x 29MB (M!)

# Disk trends


- Disk capacity, 1975-1989
  - doubled every 3+ years
  - 25% improvement each year
  - factor of 10 every decade
  - exponential, but far less rapid than processor performance
- Disk capacity since 1990
  - doubling every 12 months
  - 100% improvement each year
  - factor of 1000 every decade
  - 10x as fast as processor performance!

# Memory hierarchy

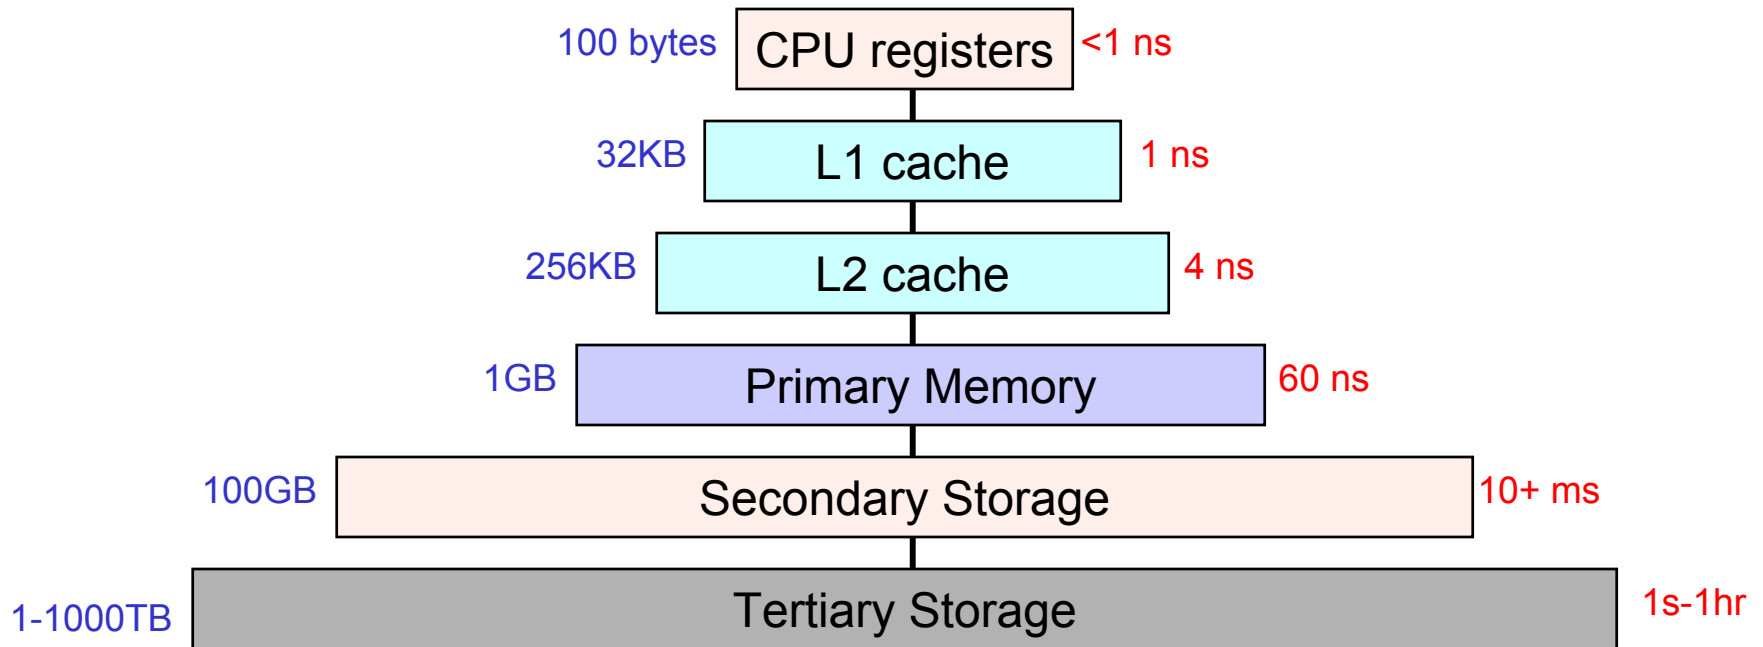

- Each level acts as a cache of lower levels

# Memory hierarchy: distance analogy

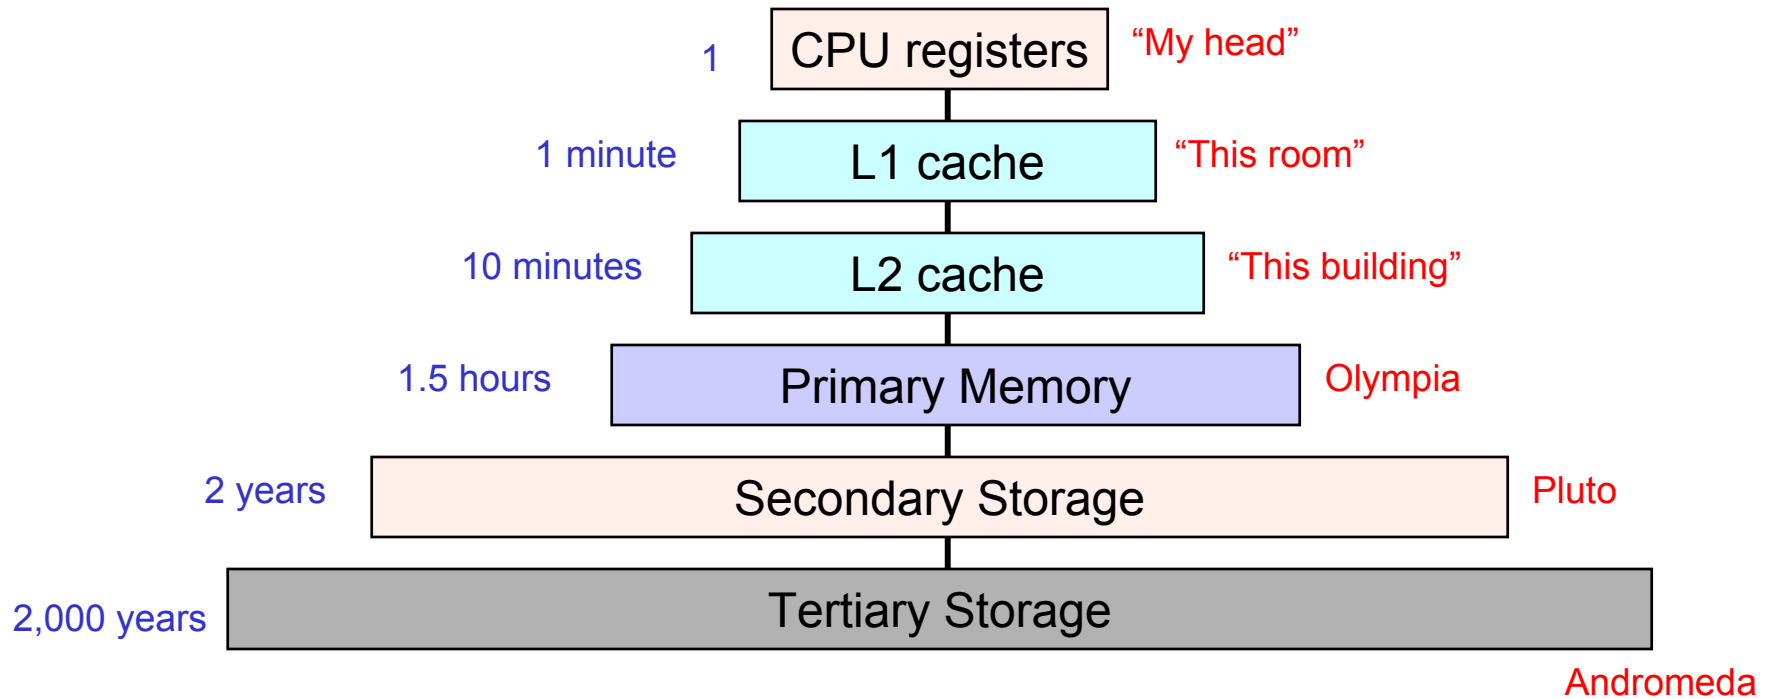


# Disks and the OS

- Disks are messy, messy devices
  - errors, bad blocks, missed seeks, etc.
- Job of OS is to hide this mess from higher-level software
  - low-level device drivers (initiate a disk read, etc.)
  - higher-level abstractions (files, databases, etc.)
- OS may provide different levels of disk access to different clients
  - physical disk block (surface, cylinder, sector)
  - disk logical block (disk block #)
  - file logical (filename, block or record or byte #)

# Physical disk structure

- Disk components

- platters
- surfaces
- tracks
- sectors
- cylinders
- arm
- heads

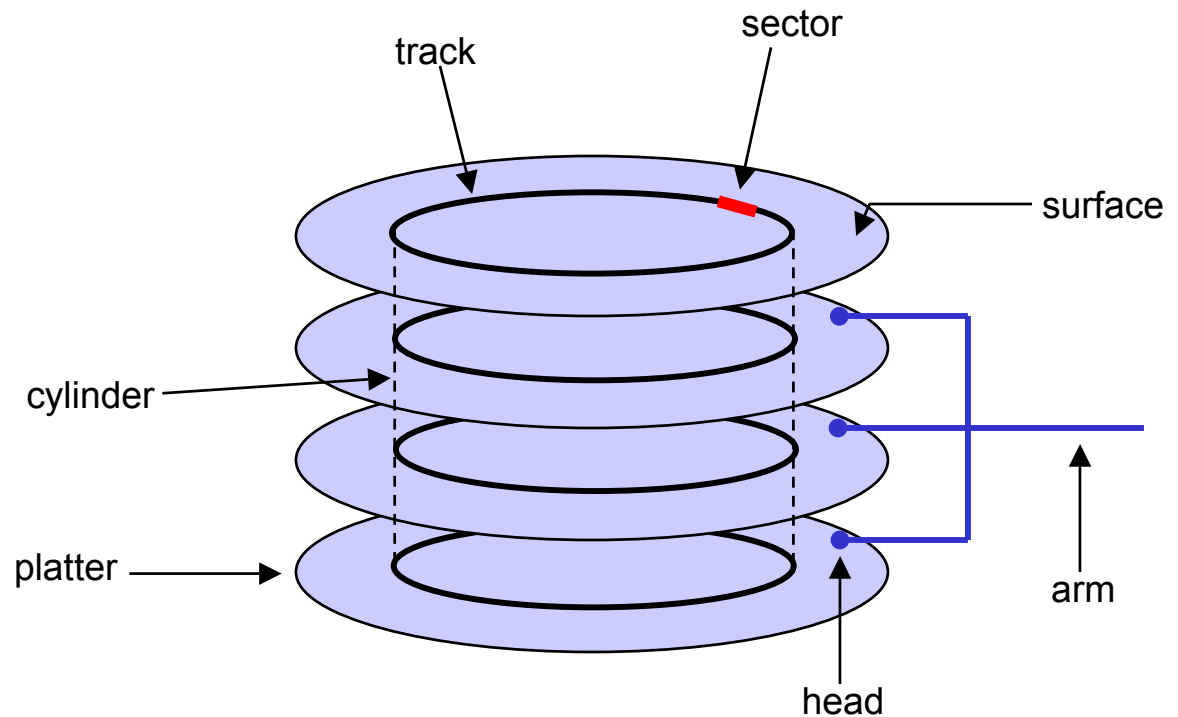



# Disk performance

- Performance depends on a number of steps
  - **seek**: moving the disk arm to the correct cylinder
    - depends on how fast disk arm can move
      - seek times aren't diminishing very quickly (why?)
  - **rotation (latency)**: waiting for the sector to rotate under head
    - depends on rotation rate of disk
      - rates are increasing, but slowly (why?)
  - **transfer**: transferring data from surface into disk controller, and from there sending it back to host
    - depends on density of bytes on disk
      - increasing, and very quickly
- When the OS uses the disk, it tries to minimize the cost of all of these steps
  - particularly seeks and rotation

# Disk scheduling

- Seeks are very expensive, so the OS attempts to schedule disk requests that are queued waiting for the disk
  - FCFS (do nothing)
    - reasonable when load is low
    - long waiting time for long request queues
  - SSTF (shortest seek time first)
    - minimize arm movement (seek time), maximize request rate
    - unfairly favors middle blocks
  - SCAN (elevator algorithm)
    - service requests in one direction until done, then reverse
    - skews wait times non-uniformly (why?)
  - C-SCAN
    - like scan, but only go in one direction (typewriter)
    - uniform wait times

# Interacting with disks

- In the old days...
  - OS would have to specify cylinder #, sector #, surface #, transfer size
    - i.e., OS needs to know all of the disk parameters
- Modern disks are even more complicated
  - not all sectors are the same size, sectors are remapped, ...
  - disk provides a higher-level interface, e.g., SCSI
    - exports data as a logical array of blocks [0 ... N]
    - maps **logical blocks** to cylinder/surface/sector
    - OS only needs to name logical block #, disk maps this to cylinder/surface/sector
    - on-board cache
    - as a result, physical parameters are hidden from OS
      - both good and bad

# Example disk characteristics

- IBM Ultrastar 36XP drive
  - form factor: 3.5"
  - capacity: 36.4 GB
  - rotation rate: 7,200 RPM (120 RPS)
  - platters: 10
  - surfaces: 20
  - sector size: 512-732 bytes
  - cylinders: 11,494
  - cache: 4MB
  - transfer rate: 17.9 MB/s (inner) – 28.9 MB/s (outer)
  - full seek: 14.5 ms
  - head switch: 0.3 ms

