Hierarchical Modeling

Brian Curless CSE 557 Fall 2015

1

Reading

Required:


• Angel, sections 8.1 – 8.6, 8.8 (online handout)

Optional:

• OpenGL Programming Guide, chapter 3

3D Example: A robot arm

Let's build a robot arm out of a cylinder and two cuboids, with the following 3 degrees of freedom:

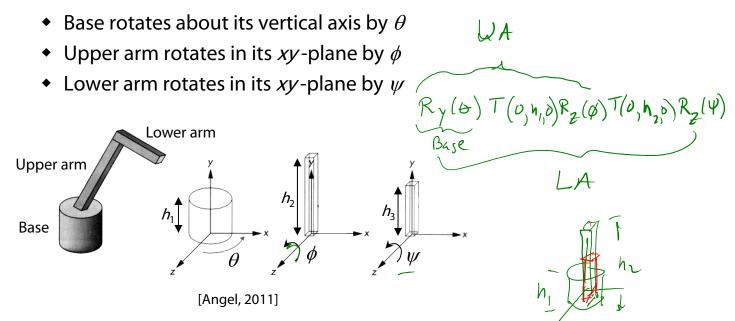

(Note that the angles are set to zero in the figure; i.e., the parts are shown in their "default" positions.)


Q: What matrix do we use to transform the base?

Q: What matrix for the upper arm?


Q: What matrix for the lower arm?

3D Example: A robot arm


An alternative interpretation is that we are taking the original coordinate frames...

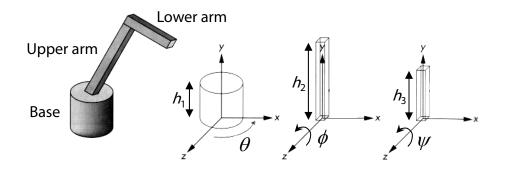

...and translating and rotating them into place:

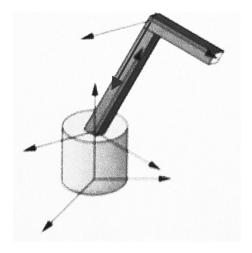

From parts to model to viewer

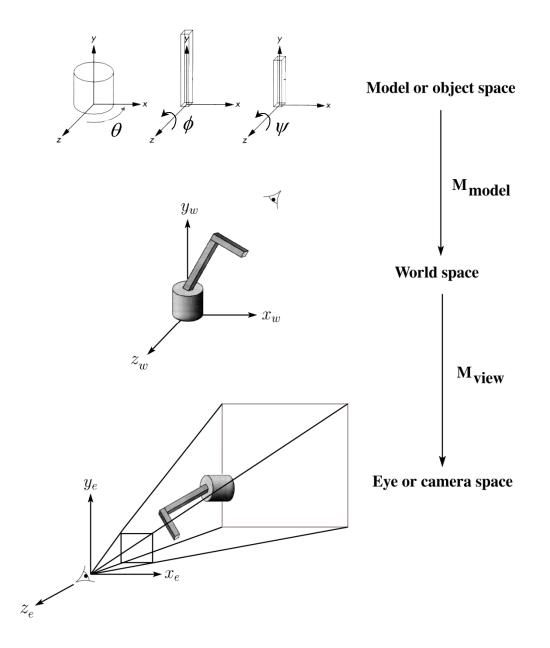

Robot arm implementation

The robot arm can be displayed by keeping a global matrix and computing it at each step:

```
Matrix M, M_model, M_view;
main()
{
    . . .
    M view = compute view transform();
    robot_arm();
    . . .
}
robot arm()
{
    M_model = R_y(theta);
    M = M_view*M_model;
    base();
    M_model = R_y(theta) *T(0,h1,0) *R_z(phi);
    M = M_view*M_model;
    upper_arm();
    M \mod = R y(\text{theta}) * T(0, h1, 0)
                  *R_z(phi) *T(0,h2,0) *R_z(psi);
    M = M_view*M_model;
    lower arm();
}
Do the matrix computations seem wasteful?
```

Robot arm implementation, better

Instead of recalculating the global matrix each time, we can just update it *in place* by concatenating matrices on the right:

```
Matrix M_modelview;
main()
{
    . . .
    M modelview = compute_view_transform();
    robot arm();
    • • •
}
robot arm()
{
    M_modelview *= R_y(theta);
    base();
    M modelview *= T(0,h1,0) *R z(phi);
    upper_arm();
    M_modelview *= T(0,h2,0)*R z(psi);
    lower_arm();
}
```


Robot arm implementation, OpenGL

OpenGL maintains a global state matrix called the **model-view matrix**, which is updated by concatenating matrices on the *right*.

```
main()
{
    . . .
    glMatrixMode( GL MODELVIEW );
    Matrix M = compute view xform();
    glLoadMatrixf( M );
    robot arm();
    . . .
}
robot arm()
{
    glRotatef( theta, 0.0, 1.0, 0.0 );
    base();
    glTranslatef( 0.0, h1, 0.0 );
    glRotatef( phi, 0.0, 0.0, 1.0 );
    lower arm();
    glTranslatef( 0.0, h2, 0.0 );
    glRotatef( psi, 0.0, 0.0, 1.0 );
    upper arm();
}
```

Hierarchical modeling

Hierarchical models can be composed of instances using trees or DAGs:

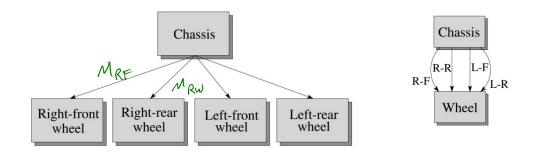


- edges contain geometric transformations
- nodes contain geometry (and possibly drawing attributes)

How might we draw the tree for the robot arm?

BASE MUA UA LA

A complex example: human figure

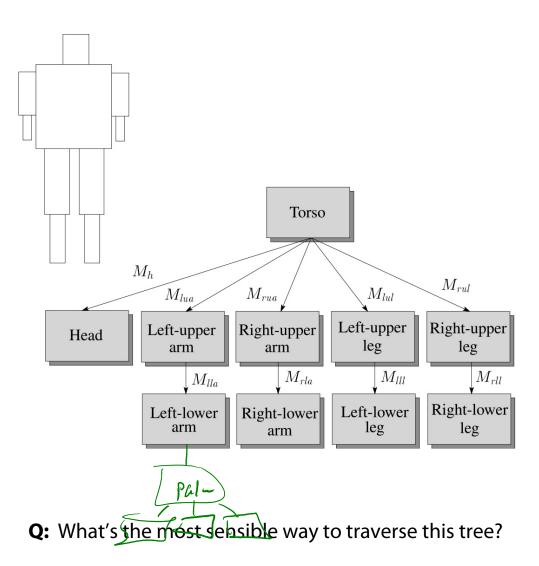

Human figure implementation, OpenGL

```
figure()
   torso();
   glPushMatrix();
       glTranslate( ... );
       glRotate( ... );
       head();
   glPopMatrix();
   glPushMatrix();
       glTranslate( ... );
       glRotate( ... );
       left_upper_arm();
       glPushMatrix();
           glTranslate( ... );
           glRotate( ... );
           left_lower_arm();
       glPopMatrix();
    glPopMatrix();
    . . .
```

{

}

Animation

The above examples are called **articulated models**:

- rigid parts
- connected by joints

They can be animated by specifying the joint angles (or other display parameters) as functions of time.

Key-frame animation

The most common method for character animation in production is **key-frame animation**.

- Each joint specified at various **key frames** (not necessarily the same as other joints)
- System does interpolation or **in-betweening**

Doing this well requires:

- A way of smoothly interpolating key frames: splines
- A good interactive system
- A lot of skill on the part of the animator

