

Pipelining - Part 2

CSE 410 - Computer Systems

October 19, 2001

Readings and References

- Reading
 - Sections 6.4 through 6.6, Patterson and Hennessy, Computer Organization & Design
- Other References

Control Hazards

- Branch instructions cause **control hazards** (aka **branch hazards**) because we don't know which instruction to fetch next

```
bne $s0, $s1, skip
add $s4, $s3, $s0
...
skip:
sub $s4, $s3, $s0
```




we don't know
until here



do we fetch the
add or the **sub**?

Stall for branch hazard


- We could stall to see which instruction to execute next
 - would introduce a 4-cycle pipeline bubble

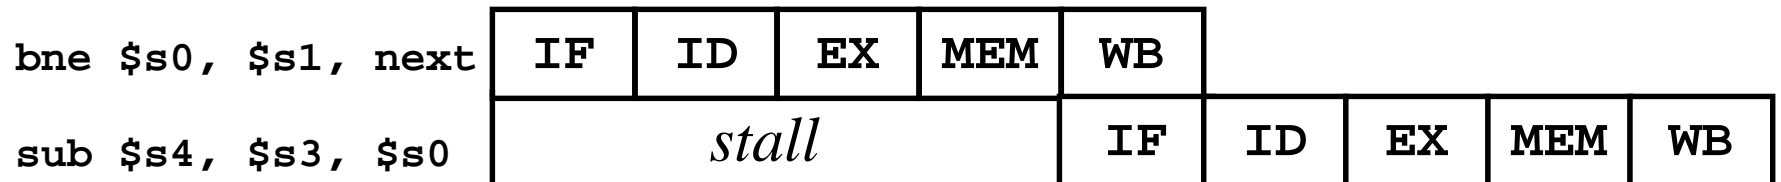

Move Branch Logic to ID

- Move the branch hardware to ID stage
 - Hardware to compare two registers is simpler than hardware to add them
- We still have to stall for one cycle
- And we can't move the branch up any more

```
bne $s0, $s1, next
sub $s4, $s3, $s0
```

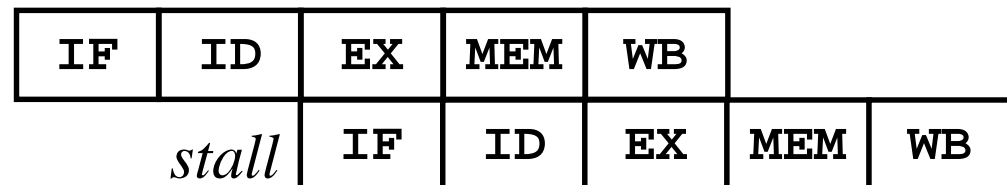

Reordering Instructions

- Reordering instructions is a common technique for avoiding pipeline stalls
- Static reordering
 - programmer, compiler and assembler do this
- Dynamic reordering
 - modern processors can see several instructions
 - they execute any that have no dependency
 - this is known as *out-of-order execution* and is complicated to implement

Branch Delay Slot

- A branch now causes a stall of one cycle
- Try to execute an instruction instead of stall
- The compiler (assembler, programmer) must find an instruction to fill the branch delay slot
 - 50% of the instructions are useful
 - 50% are **nops** which don't do anything


Branch Delay Slot execution

- Instruction in the branch delay slot always executes, no matter what the branch does
 - it follows the branch in memory
 - but it “piggybacks” and is always executed
 - no bubble at all

```
bne $s0, $s1, next
```

```
add $s3, $s3, 1
```

```
sub $s4, $s3, $s0
```

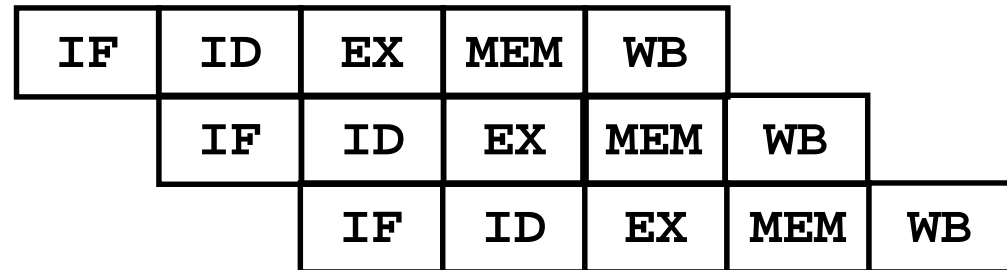

beq with delay slot

```
.set      noreorder
.set      nomacro
beq       $v0,$zero,$L4
move      $s1,$s4
.set      macro
.set      reorder
```

jal with delay slot

```
move    $a0,$s3
move    $a1,$s0
.set    noreorder
.set    nomacro
jal      QuickSort
move    $a2,$s4
.set    macro
.set    reorder
```

Assume we will not branch

- Assume the branch is not taken
 - Execute the next instruction in memory
- If we guessed right, we're golden
 - no bubble at all
- If we guessed wrong, then we lose a little
 - squash the partially completed instructions.
 - This is called *flushing the pipeline*
 - Wasted time, but would have stalled anyway


Squash

- Must be able to completely suppress the effects of guessing wrong
 - An instruction cannot write to memory or a register until we're sure it should execute


Assume Branch Not Taken

```
bne $s0,$zero,Done
addi $t0,$t0,1
addi $t0,$t0,3
Done: move $t1,$t0
```

Branch not taken

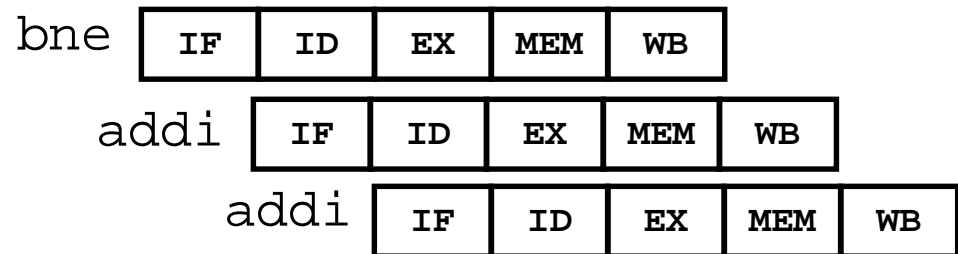

Branch taken

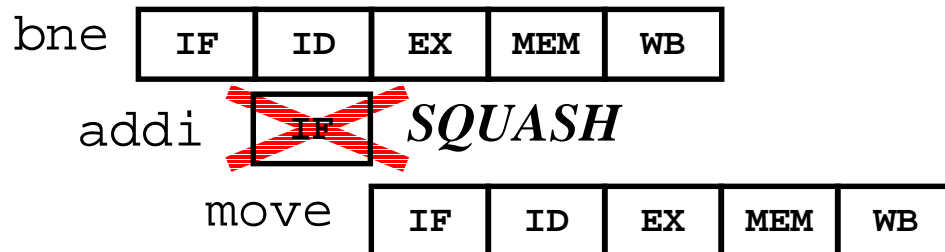

Static Branch Prediction

- Most backwards branch are taken (80%)
 - they are part of loops
- Half of forward branches are taken (50%)
 - if statements
- Common static branch prediction scheme is
 - predict backwards branches are taken
 - predict forward branches are not taken
- This does okay (70-80%), but not great


Dynamic Branch Prediction

- Most programs are pretty regular
 - Most of the time only execute a small subset of the program code
 - Same branch instructions execute repeatedly
- A particular branch instruction is usually:
 - taken if it was taken last time
 - not taken if it was not taken last time
- If we keep a history of each branch instruction, then we can predict much better

Dynamic Branch Prediction

- The CPU records what happened last time we executed the branch at this address
- Generally record last two results
 - simple 4-state transition table makes prediction
- Dynamic branch prediction is 92-98% accurate

2-bit prediction scheme

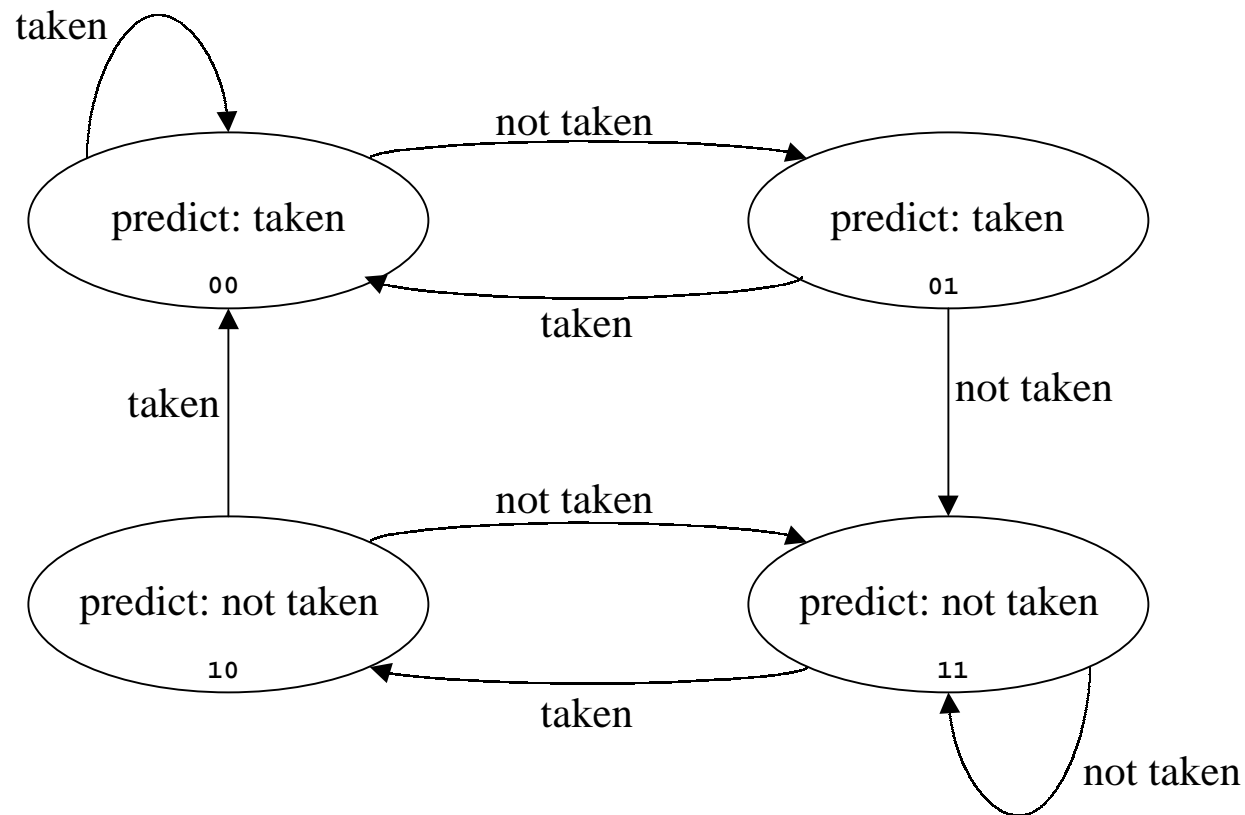

Implementing Branch Prediction

- There is not room to store every branch instruction address
 - so last few bits of the instruction address are used to index into the table
 - some instructions collide like a hash table
 - but that's okay, it just means we're wrong once in a while

Branch Prediction Table

Address	state?	Predict	correct?	new state
...
0x004012 34	11	not taken	yes	11
0x004F02 38	00	taken	no	01
0x004022 3C	10	not taken	no	00
...

Importance of Branch Prediction

- Branches occur very frequently
 - every five instructions on average
- Modern processors execute up to 4 instructions per cycle
 - so a branch occurs every 2 cycles
- Newer pipelines are getting longer
 - 8,9,11,13 cycles
 - error penalty is 3-5 cycles instead of 1 cycle