

## Pipelining – Part 2

CSE 410, Spring 2004  
Computer Systems


<http://www.cs.washington.edu/education/courses/410/04sp/>

## Reading and References

- Sections 6.4-6.6, *Computer Organization and Design, Patterson and Hennessy*


## Control Hazards

- Branch instructions cause **control hazards** (aka **branch hazards**) because we don't know which instruction to fetch next

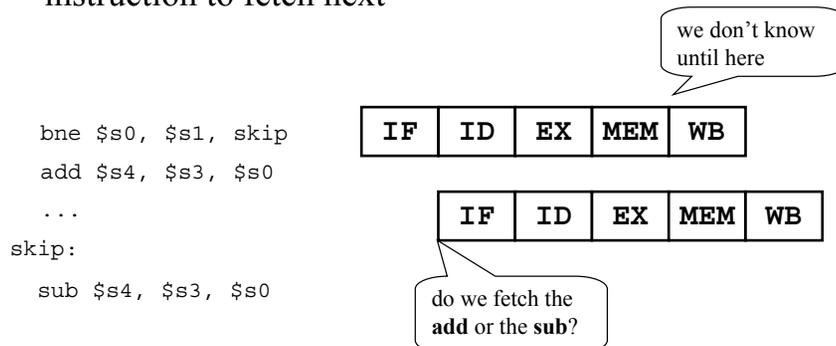


## Idea: Stall for branch hazard

- Stall until we know which instruction to execute next
  - » would introduce a 4-cycle pipeline bubble in the basic pipeline



## Idea: Move Branch Logic to ID

- Move the branch hardware to ID stage
  - » Hardware to compare two registers is simpler than hardware to add them
- We still have to stall for one cycle
- And we can't move the branch up any more



## Idea: Reorder Instructions


- Reordering instructions is a common technique for avoiding pipeline stalls
- Static reordering
  - » programmer, compiler and assembler do this
- Dynamic reordering
  - » modern processors can see several instructions
  - » they execute any that have no dependency
  - » this is known as *out-of-order execution* and is complicated to implement but effective

## Branch Delay Slot

- A branch now causes a stall of one cycle
- Try to execute an instruction instead of nop
- The compiler (assembler, programmer) must find an instruction to fill the branch delay slot
  - » 50% of the instructions are useful
  - » 50% are **nops** which don't do anything

## Branch Delay Slot execution

- Instruction in the branch delay slot always executes, no matter what the branch does
  - » it follows the branch in memory
  - » but it “piggybacks” and is always executed
  - » no bubble at all

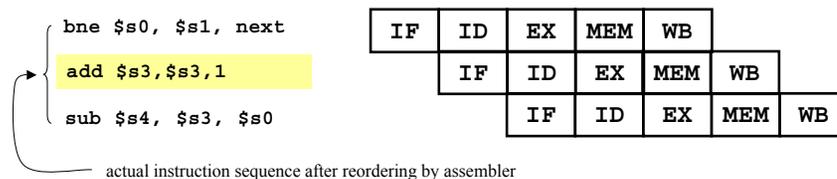

## beq with delay slot

```
.set    noreorder
.set    nomacro
beq    $v0,$zero,$L4
move   $s1,$s4
.set    macro
.set    reorder
```

## jal with delay slot

```
move    $a0,$s3
move    $a1,$s0
.set    noreorder
.set    nomacro
jal    QuickSort
move   $a2,$s4
.set    macro
.set    reorder
```


## Idea: Predict the branch action

- For example, assume the branch is not taken
  - » Execute the next instruction in memory
- If we guessed right, we're golden
  - » no bubble at all
- If we guessed wrong, then we lose a little
  - » squash the partially completed instructions.
  - » This is called *flushing the pipeline*
  - » Wasted time, but would have stalled anyway

## Squash

- Must be able to completely suppress the effects of guessing wrong
  - » An instruction cannot write to memory or a register until we're sure it should execute

## Assume Branch Not Taken

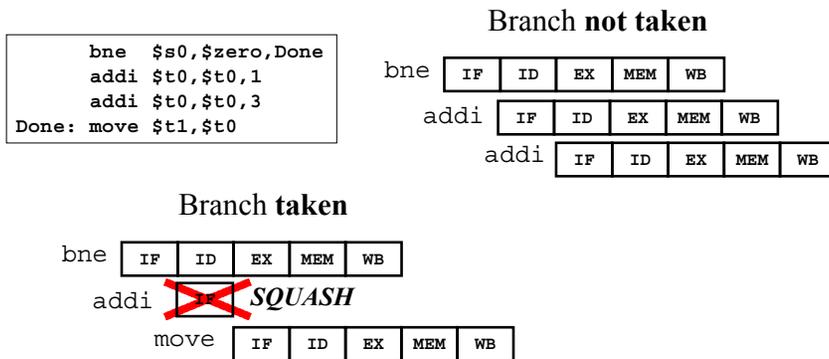

## Static Branch Prediction

- Most backwards branch are taken (80%)
  - » they are part of loops
- Half of forward branches are taken (50%)
  - » if statements
- Common static branch prediction scheme is
  - » predict backwards branches are taken
  - » predict forward branches are not taken
- This does okay (70-80%), but not great


## Dynamic Branch Prediction

- Most programs are pretty regular
  - » Most of the time only execute a small subset of the program code
  - » Same branch instructions execute repeatedly
- A particular branch instruction is usually:
  - » taken if it was taken last time
  - » not taken if it was not taken last time
- If we keep a history of each branch instruction, then we can predict much better

## Dynamic Branch Prediction

- The CPU records what happened last time we executed the branch at this address
- Generally record last two results
  - » simple 4-state transition table makes prediction
- Dynamic branch prediction is 92-98% accurate

## 2-bit prediction scheme

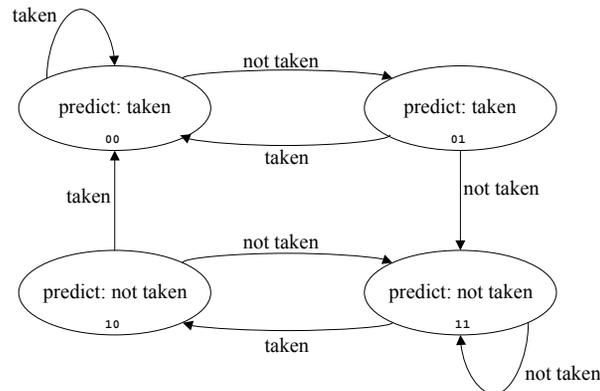

## Implementing Branch Prediction

- There is not room to store every branch instruction address
  - » so last few bits of the instruction address are used to index into a table
  - » some instructions collide like a hash table
  - » but that's okay, it just means we're wrong once in a while

## Branch Prediction Table

Address	state?	Predict	correct?	new state
...	...	...	...	...
0x00401234	11	not taken	yes	11
0x004F0238	00	taken	no	01
0x0040223C	10	not taken	no	00
...	...	...	...	...

## Importance of Branch Prediction

- Branches occur very frequently
  - » every five instructions on average
- Modern processors execute up to 4 instructions per cycle
  - » so a branch occurs every 2 cycles
- Newer pipelines are getting longer
  - » 8,9,11,13 cycles
  - » error penalty is 3-5 cycles instead of 1 cycle
  - » hard to fill branch delay slots