

Announcements

Project 1

- Due **Wednesday** at 11:59pm

Project 2

- Signup by end of day today
 - » <https://norfolk.cs.washington.edu/htbin-php/gtng/gtng.php>

Projection



<http://www.julianbeever.net/pave.htm>

Readings

- Nalwa 2.1

Projection




<http://www.julianbeever.net/pave.htm>


Readings

- Nalwa 2.1

Müller-Lyer Illusion

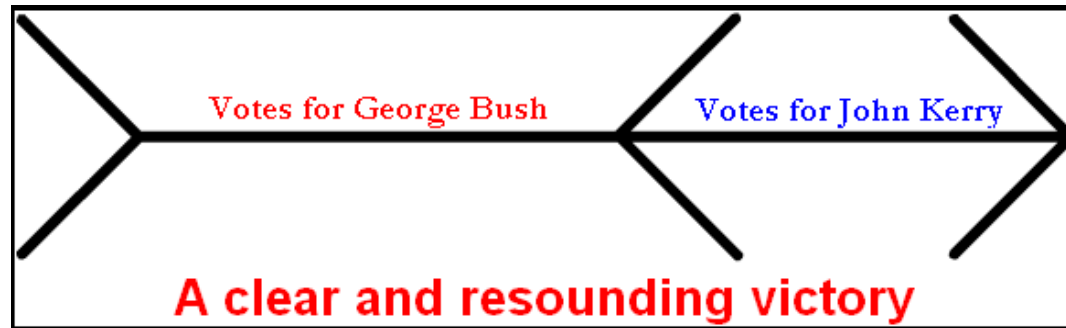


by Pravin Bhat

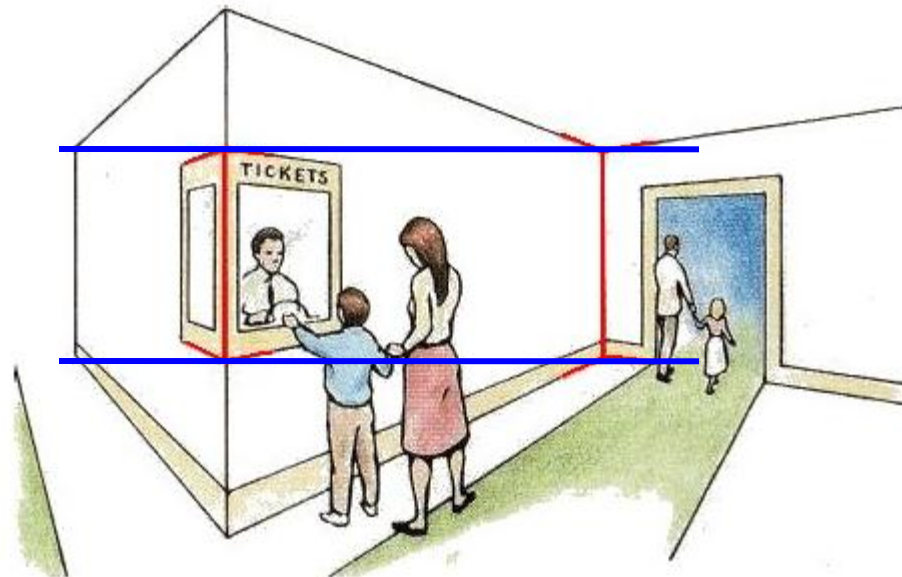

http://www.michaelbach.de/ot/sze_muelue/index.html


Image formation

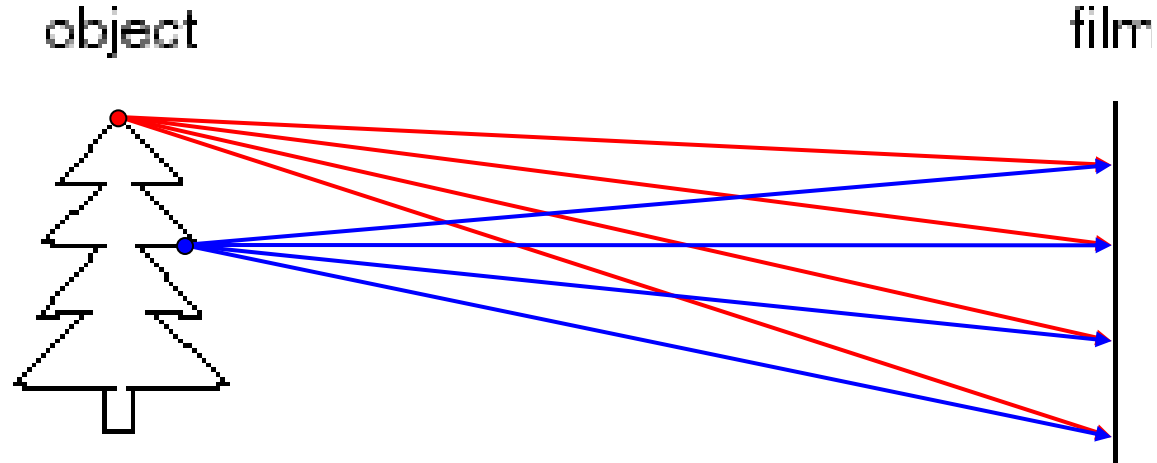

Let's design a camera

- Idea 1: put a piece of film in front of an object
- Do we get a reasonable image?

Pinhole camera

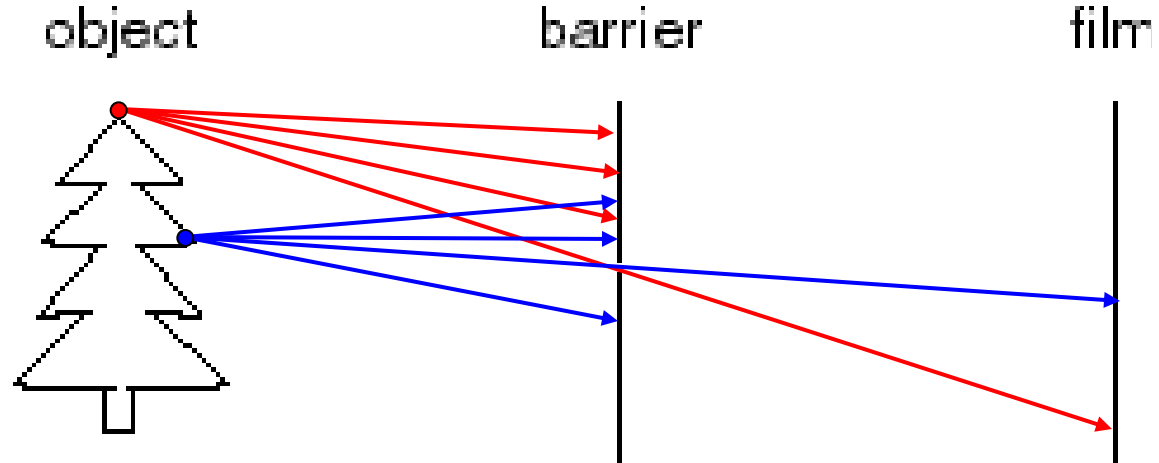

Add a barrier to block off most of the rays

- This reduces blurring
- The opening known as the **aperture**
- How does this transform the image?

Pinhole cameras everywhere




Tree shadow during a solar eclipse

photo credit: Nils van der Burg

<http://www.physicstogo.org/index.cfm>


Camera Obscura

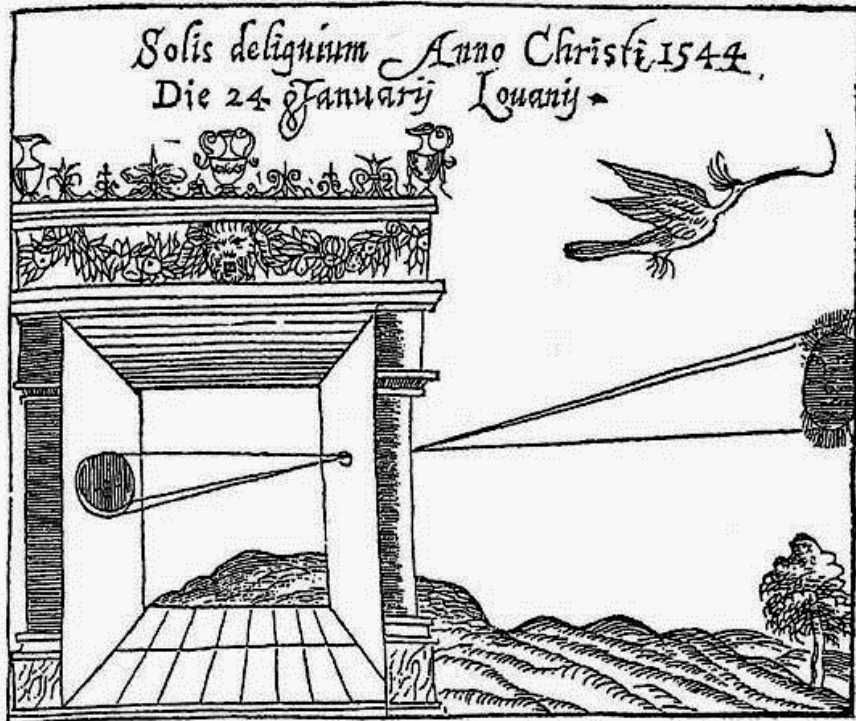

Gemma Frisius, 1558

- Basic principle known to Mozi (470-390 BC), Aristotle (384-322 BC)
- Drawing aid for artists: described by Leonardo da Vinci (1452-1519)


Camera Obscura

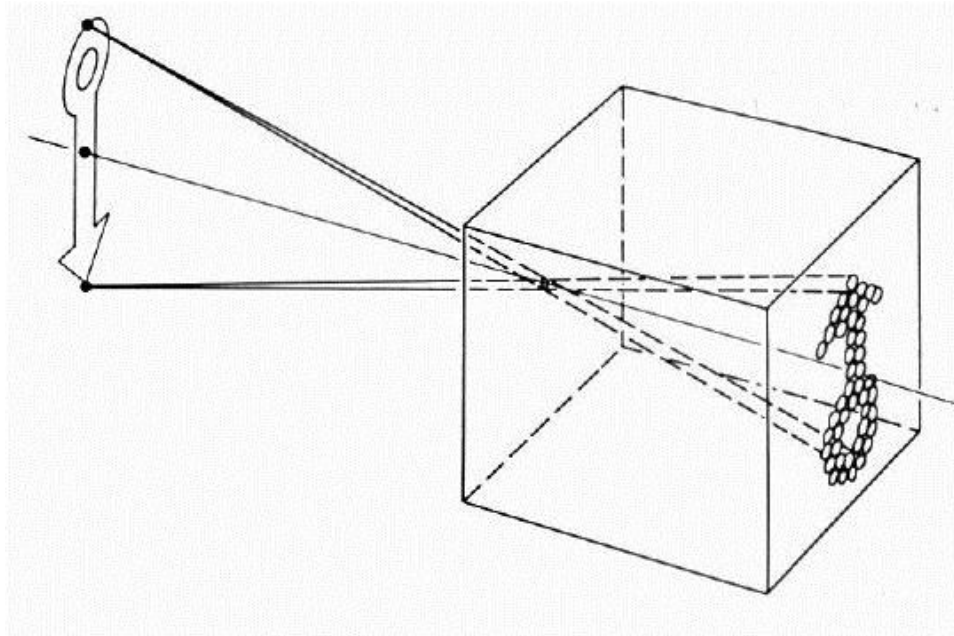

The first camera

- How does the aperture size affect the image?


Shrinking the aperture

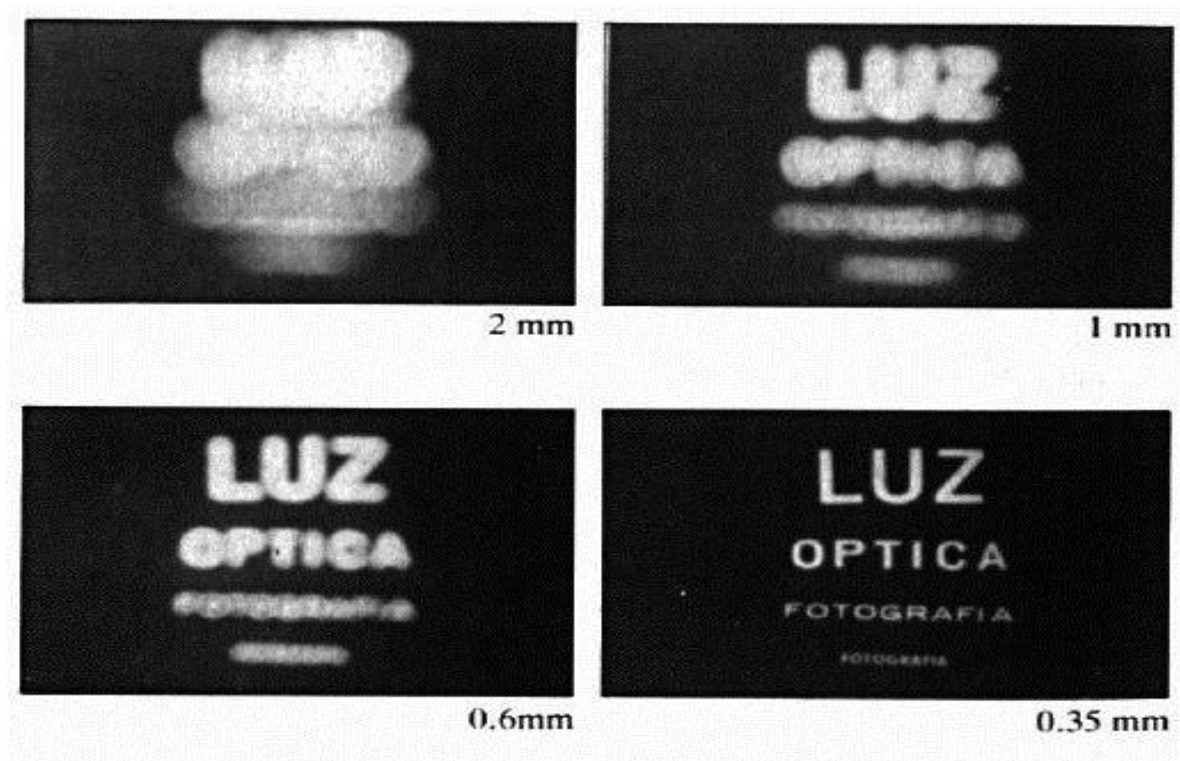


Why not make the aperture as small as possible?

- Less light gets through
- *Diffraction* effects...

Shrinking the aperture

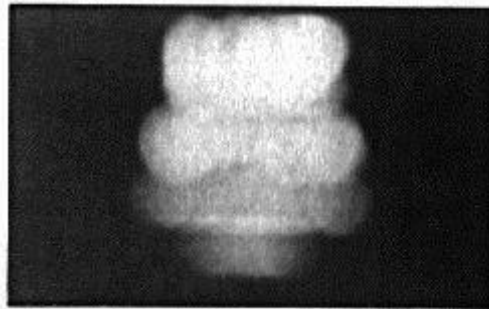

2 mm

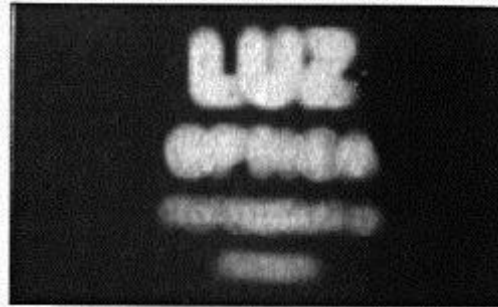

1 mm



0.6 mm



0.35 mm




0.15 mm



0.07 mm


Adding a lens

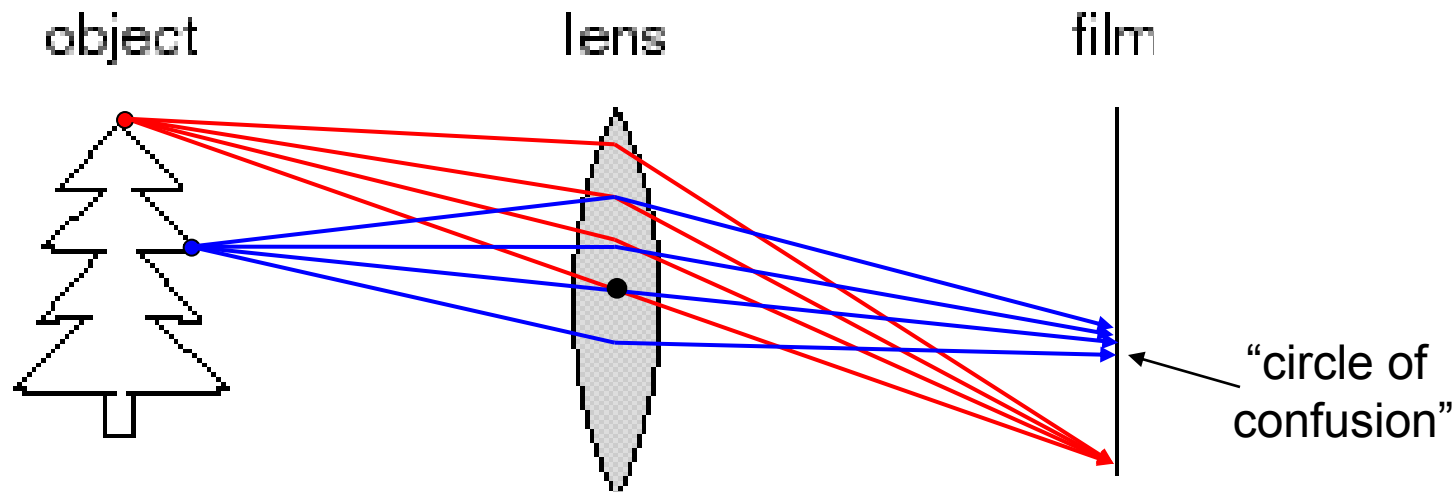

A lens focuses light onto the film

- There is a specific distance at which objects are “in focus”
 - other points project to a “circle of confusion” in the image
- Changing the shape of the lens changes this distance


Lenses

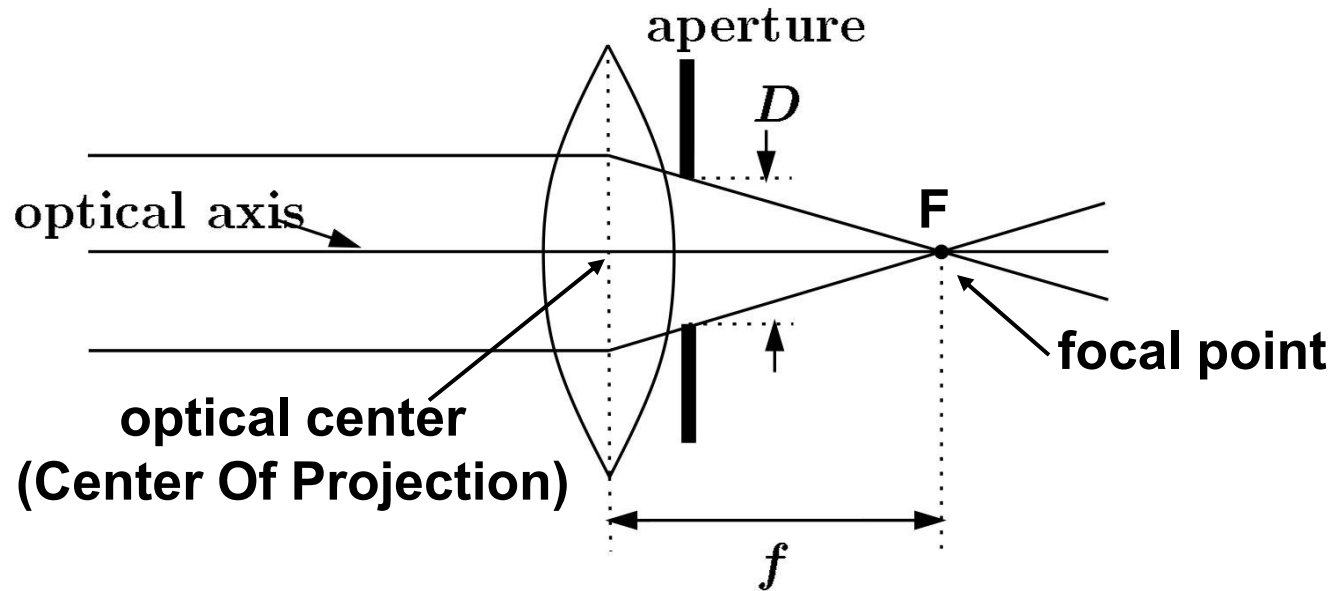

A lens focuses parallel rays onto a single focal point

- focal point at a distance f beyond the plane of the lens
 - f is a function of the shape and index of refraction of the lens
- Aperture of diameter D restricts the range of rays
 - aperture may be on either side of the lens
- Lenses are typically spherical (easier to produce)


Thin lenses

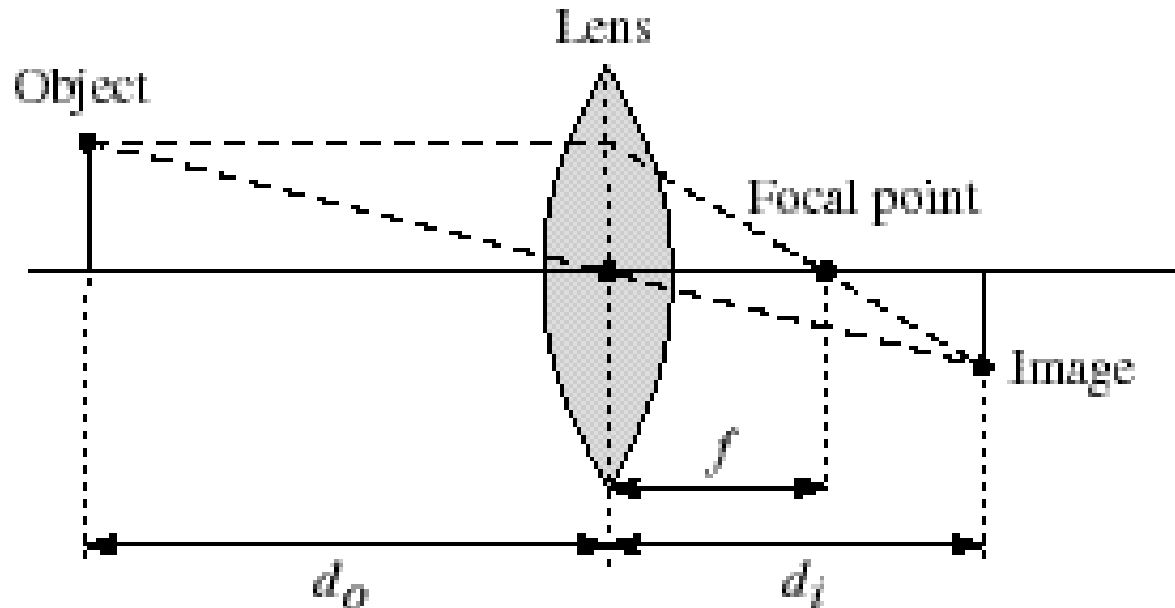

Thin lens equation:
$$\frac{1}{d_o} + \frac{1}{d_i} = \frac{1}{f}$$

- Any object point satisfying this equation is in focus
- What is the shape of the focus region?
- How can we change the focus region?
- Thin lens applet: http://www.phy.ntnu.edu.tw/java/Lens/lens_e.html (by Fu-Kwun Hwang)

Depth of field

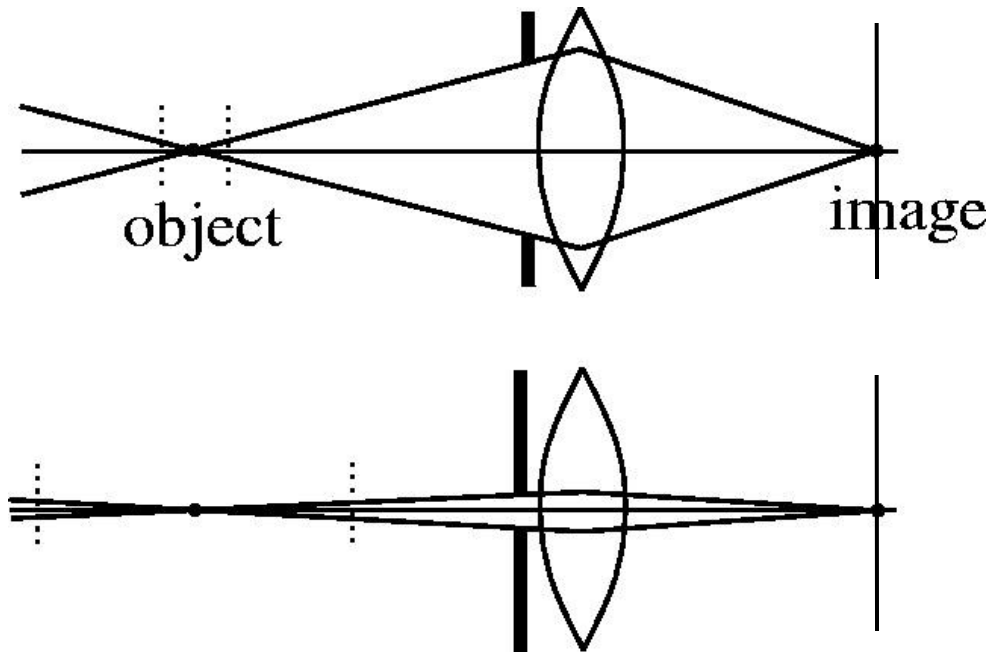

$f/5.6$




$f/32$

Changing the aperture size affects depth of field

- A smaller aperture increases the range in which the object is approximately in focus

The eye

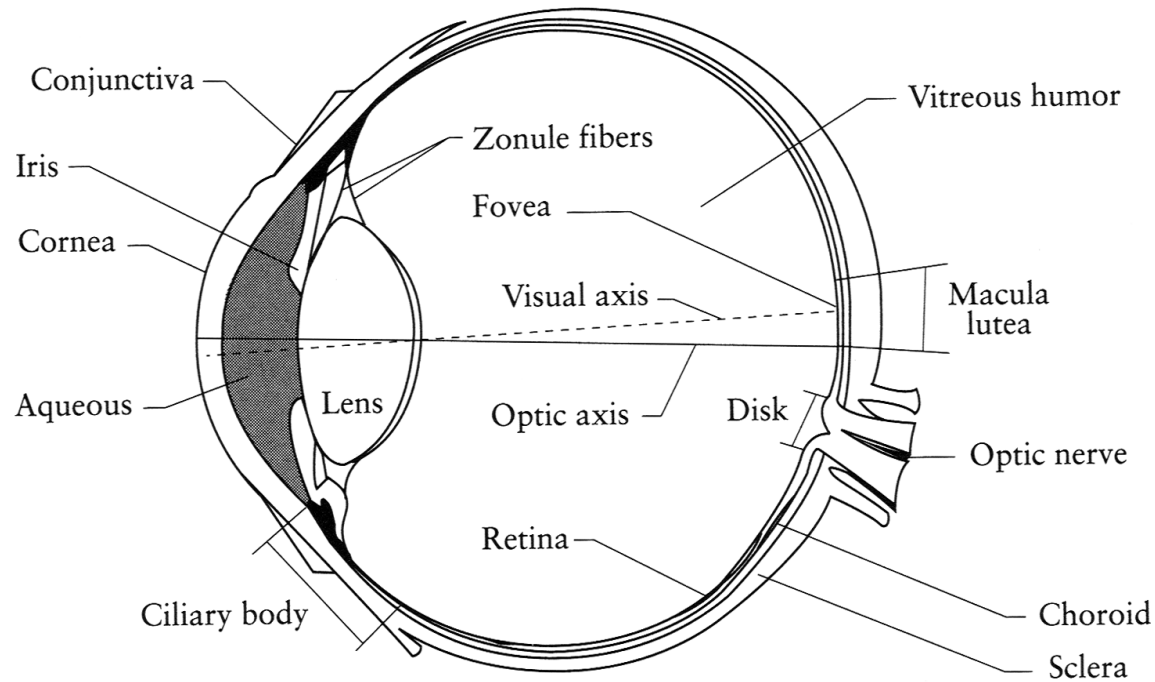

The human eye is a camera

- **Iris** - colored annulus with radial muscles
- **Pupil** - the hole (aperture) whose size is controlled by the iris
- What's the "film"?
 - photoreceptor cells (rods and cones) in the **retina**

Digital camera



A digital camera replaces film with a sensor array

- Each cell in the array is a **Charge Coupled Device**
 - light-sensitive diode that converts photons to electrons
 - other variants exist: CMOS is becoming more popular
 - <http://electronics.howstuffworks.com/digital-camera.htm>

Issues with digital cameras

Noise

- big difference between consumer vs. SLR-style cameras
- low light is where you most notice [noise](#)

Compression

- creates [artifacts](#) except in uncompressed formats (tiff, raw)

Color

- [color fringing](#) artifacts from [Bayer patterns](#)

Blooming

- charge [overflowing](#) into neighboring pixels

In-camera processing

- oversharpening can produce [halos](#)

Interlaced vs. progressive scan video

- [even/odd rows from different exposures](#)

Are more megapixels better?

- requires higher quality lens
- noise issues


Stabilization

- compensate for camera shake (mechanical vs. electronic)

More info online, e.g.,

- <http://electronics.howstuffworks.com/digital-camera.htm>
- <http://www.dpreview.com/>


Modeling projection

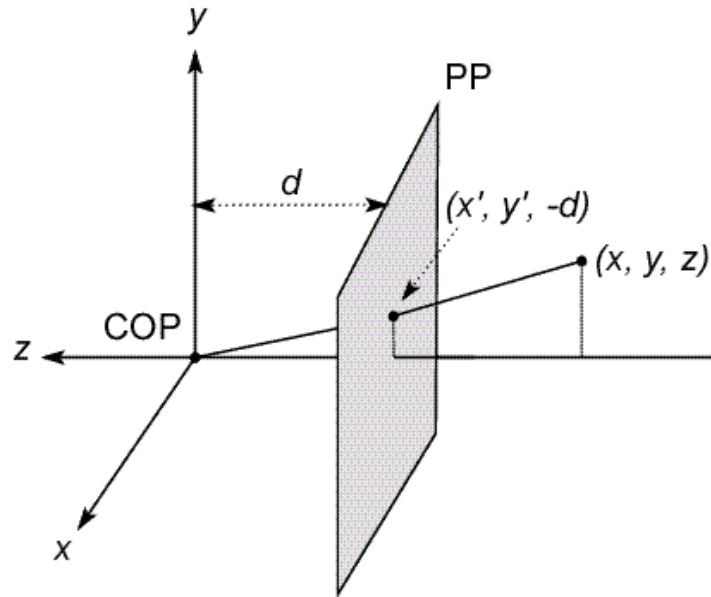

The coordinate system

- We will use the pin-hole model as an approximation
- Put the optical center (**C**enter **O**f **P**rojection) at the origin
- Put the image plane (**P**rojection **P**lane) *in front* of the COP
 - Why?
- The camera looks down the *negative* z axis
 - we need this if we want right-handed-coordinates

Modeling projection

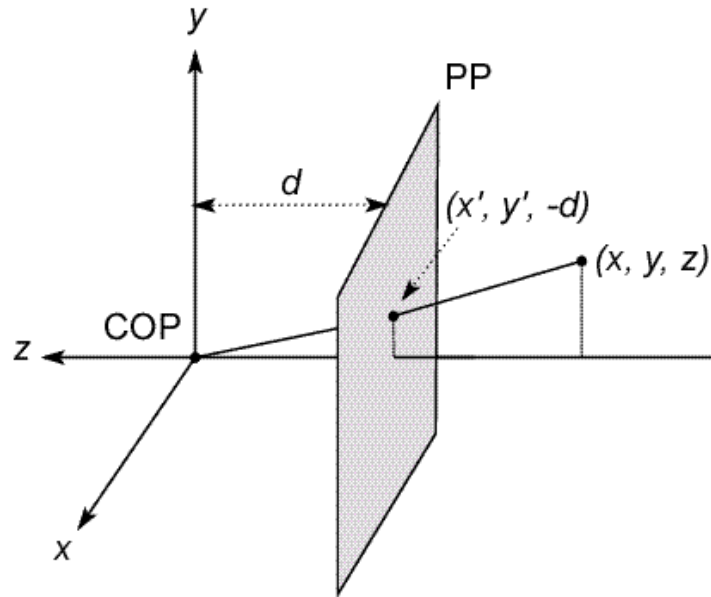

Projection equations

- Compute intersection with PP of ray from (x,y,z) to COP
- Derived using similar triangles (on board)

$$(x, y, z) \rightarrow \left(-d\frac{x}{z}, -d\frac{y}{z}, -d\right)$$

- We get the projection by throwing out the last coordinate:

$$(x, y, z) \rightarrow \left(-d\frac{x}{z}, -d\frac{y}{z}\right)$$

Homogeneous coordinates

Is this a linear transformation?

- no—division by z is nonlinear

Trick: add one more coordinate:

$$(x, y) \Rightarrow \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

homogeneous image
coordinates

$$(x, y, z) \Rightarrow \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

homogeneous scene
coordinates

Converting *from* homogeneous coordinates

$$\begin{bmatrix} x \\ y \\ w \end{bmatrix} \Rightarrow (x/w, y/w) \qquad \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix} \Rightarrow (x/w, y/w, z/w)$$

Perspective Projection

Projection is a matrix multiply using homogeneous coordinates:

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & -1/d & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ -z/d \end{bmatrix} \Rightarrow \left(-d\frac{x}{z}, -d\frac{y}{z}\right)$$

divide by third coordinate

This is known as **perspective projection**

- The matrix is the **projection matrix**
- Can also formulate as a 4x4 (today's reading does this)

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & -1/d & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ z \\ -z/d \end{bmatrix} \Rightarrow \left(-d\frac{x}{z}, -d\frac{y}{z}\right)$$

divide by fourth coordinate

Perspective Projection

How does scaling the projection matrix change the transformation?


$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & -1/d & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ -z/d \end{bmatrix} \Rightarrow \left(-d\frac{x}{z}, -d\frac{y}{z}\right)$$

$$\begin{bmatrix} -d & 0 & 0 & 0 \\ 0 & -d & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} -dx \\ -dy \\ z \end{bmatrix} \Rightarrow \left(-d\frac{x}{z}, -d\frac{y}{z}\right)$$

Orthographic projection

Special case of perspective projection

- Distance from the COP to the PP is infinite

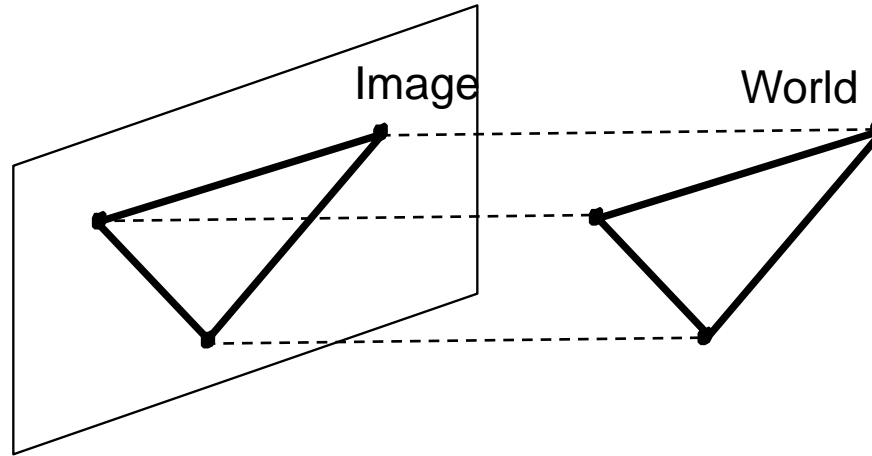


- Good approximation for telephoto optics
- Also called “parallel projection”: $(x, y, z) \rightarrow (x, y)$
- What’s the projection matrix?

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ 1 \end{bmatrix} \Rightarrow (x, y)$$

Orthographic (“telecentric”) lenses




Navitar telecentric zoom lens

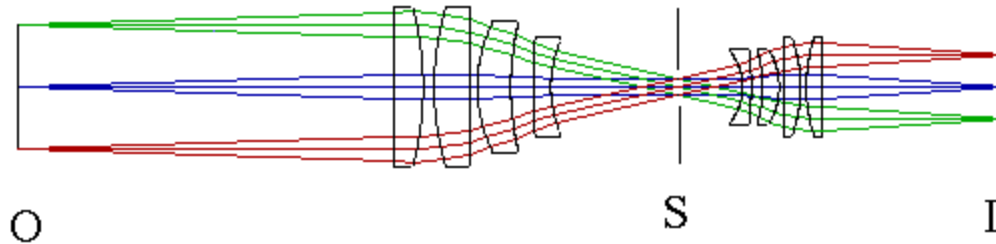


<http://www.lhup.edu/~dsimanek/3d/telecent.htm>

Orthographic projection

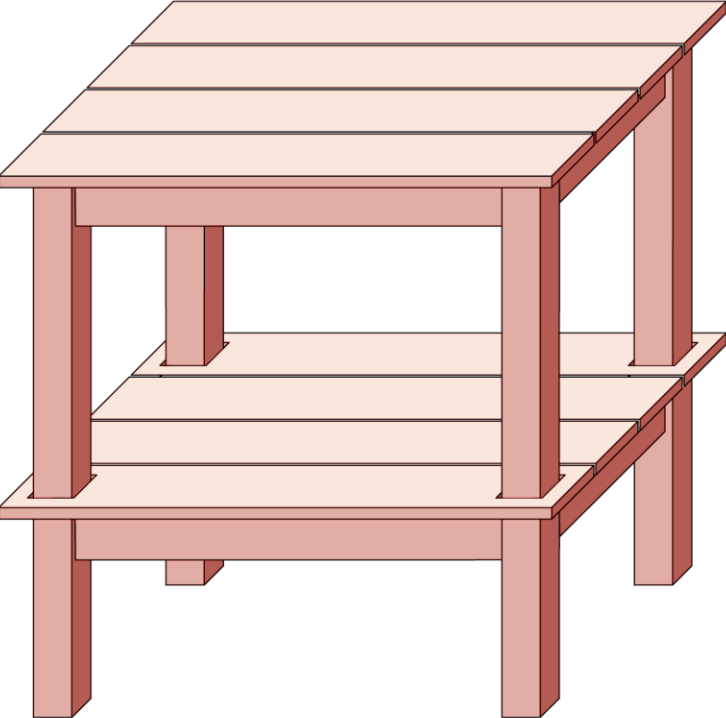

Perspective projection

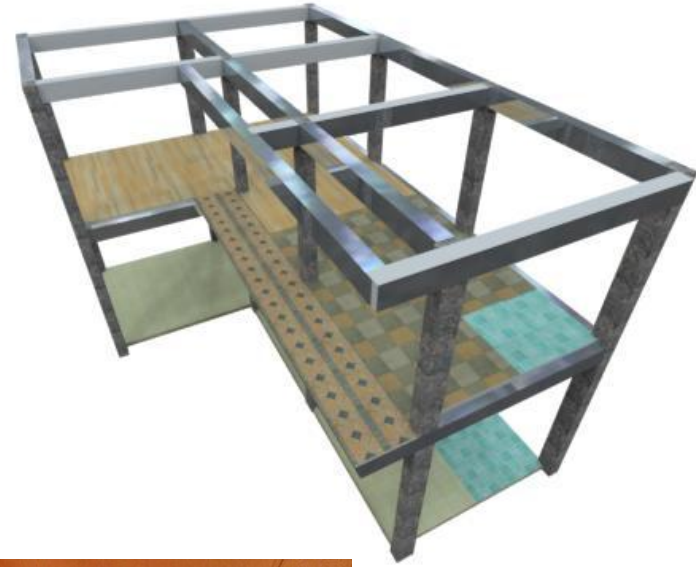


Camera parameters

How many numbers do we need to describe a camera?

We need to describe its *pose* in the world

We need to describe its internal parameters

A Tale of Two Coordinate Systems

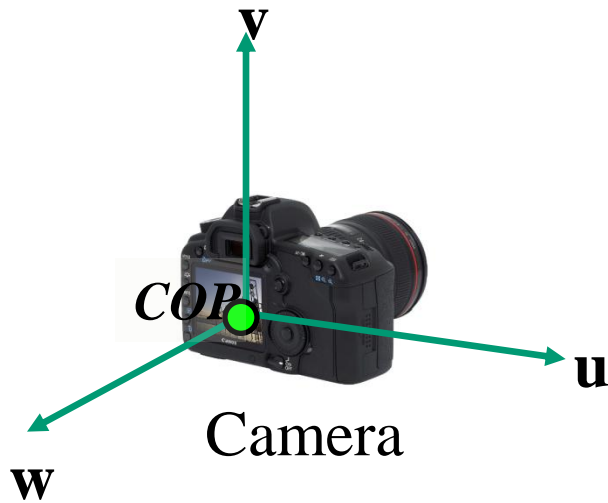

Two important coordinate systems:

1. *World* coordinate system
2. *Camera* coordinate system



Camera parameters

- To project a point (x,y,z) in *world* coordinates into a camera
- First transform (x,y,z) into *camera* coordinates
- Need to know
 - Camera position (in world coordinates)
 - Camera orientation (in world coordinates)
- Then project into the image plane
 - Need to know camera *intrinsic*s
- These can all be described with matrices


Camera parameters

A camera is described by several parameters

- Translation \mathbf{T} of the optical center from the origin of world coords
- Rotation \mathbf{R} of the image plane
- focal length f , principle point (x'_c, y'_c) , pixel size (s_x, s_y)
- blue parameters are called “extrinsics,” red are “intrinsics”

Projection equation

$$\mathbf{x} = \begin{bmatrix} wx \\ wy \\ w \end{bmatrix} = \begin{bmatrix} * & * & * & * \\ * & * & * & * \\ * & * & * & * \end{bmatrix} \begin{bmatrix} X \\ Y \\ Z \\ 1 \end{bmatrix} = \mathbf{\Pi X}$$

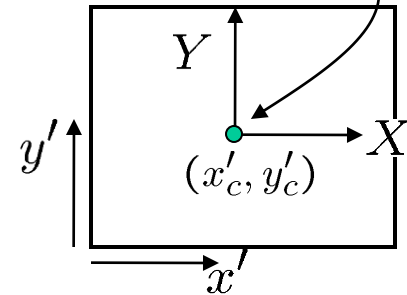

- The projection matrix models the cumulative effect of all parameters
- Useful to decompose into a series of operations


$$\mathbf{\Pi} = \begin{bmatrix} -fs_x & 0 & x'_c \\ 0 & -fs_y & y'_c \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} \mathbf{R}_{3 \times 3} & \mathbf{0}_{3 \times 1} \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix} \begin{bmatrix} \mathbf{I}_{3 \times 3} & \mathbf{T}_{3 \times 1} \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix}$$

intrinsics projection rotation translation identity matrix


- The definitions of these parameters are **not** completely standardized
 - especially intrinsics—varies from one book to another

Extrinsics

- How do we get the camera to “canonical form”?
 - (Center of projection at the origin, x-axis points right, y-axis points up, z-axis points backwards)

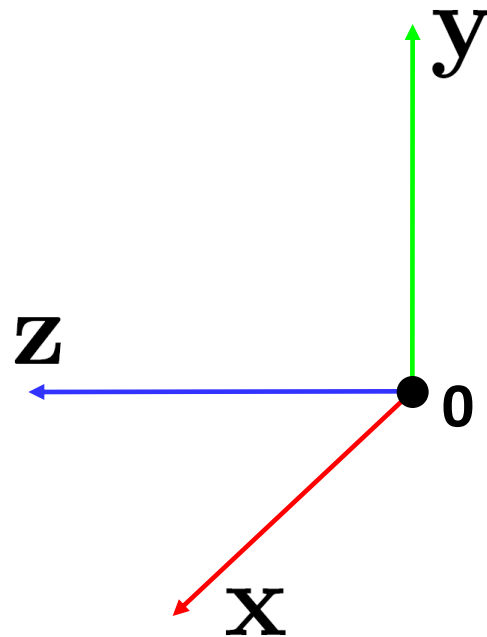


Step 1: Translate by $-c$

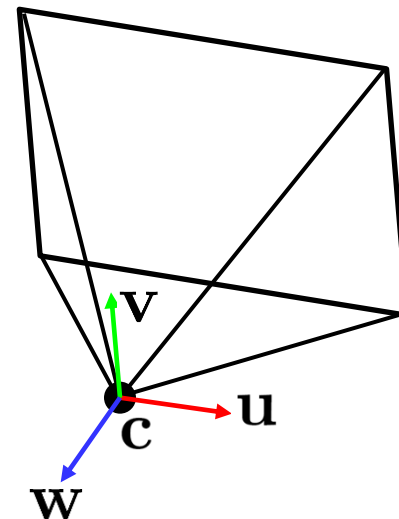

Extrinsics

- How do we get the camera to “canonical form”?
 - (Center of projection at the origin, x-axis points right, y-axis points up, z-axis points backwards)

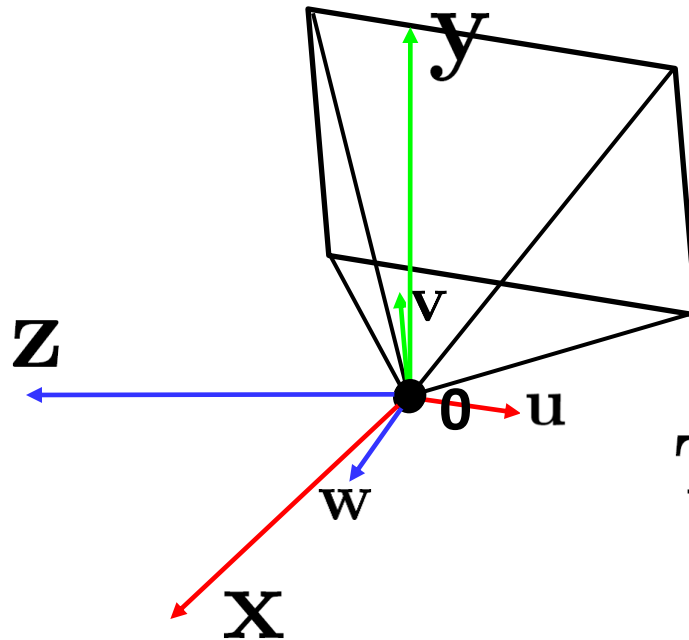


Step 1: Translate by $-\mathbf{c}$

How do we represent translation as a matrix multiplication?

$$\mathbf{T} = \begin{bmatrix} \mathbf{I}_{3 \times 3} & -\mathbf{c} \\ 0 & 0 & 0 & 1 \end{bmatrix}$$


Extrinsics

- How do we get the camera to “canonical form”?
 - (Center of projection at the origin, x-axis points right, y-axis points up, z-axis points backwards)

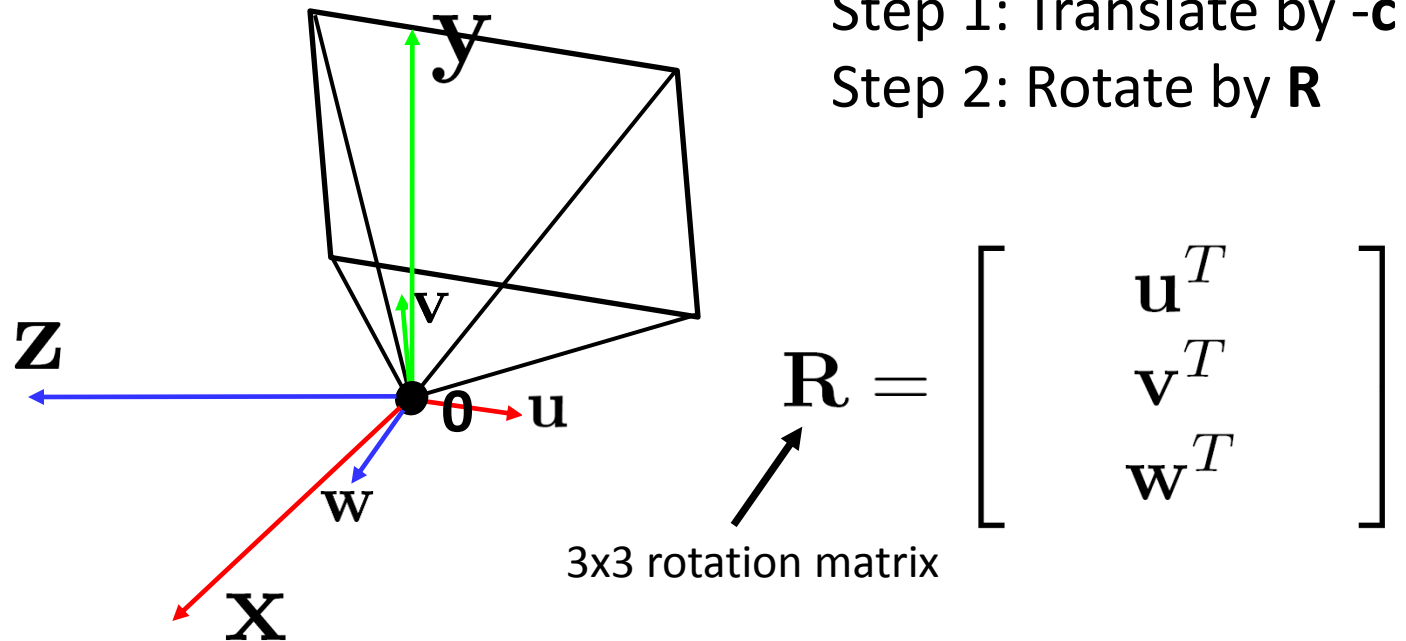

Extrinsics

- How do we get the camera to “canonical form”?
 - (Center of projection at the origin, x-axis points right, y-axis points up, z-axis points backwards)

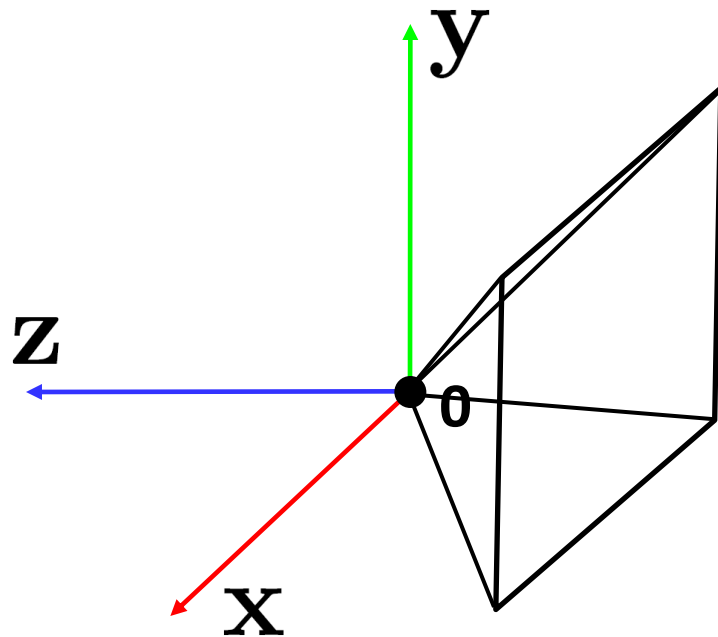

Step 1: Translate by $-c$
Step 2: Rotate by \mathbf{R}

$$\mathbf{R} = \begin{bmatrix} \mathbf{u}^T \\ \mathbf{v}^T \\ \mathbf{w}^T \end{bmatrix}$$

Perspective projection

$$\underbrace{\begin{bmatrix} -f & 0 & 0 \\ 0 & -f & 0 \\ 0 & 0 & 1 \end{bmatrix}}_{\mathbf{K}} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix}$$

K
(intrinsic)

(converts from 3D rays in camera coordinate system to pixel coordinates)

in general, $\mathbf{K} = \begin{bmatrix} -f & s & c_x \\ 0 & -\alpha f & c_y \\ 0 & 0 & 1 \end{bmatrix}$ (upper triangular matrix)

α : **aspect ratio** (1 unless pixels are not square)

s : **skew** (0 unless pixels are shaped like rhombi/parallelograms)

(c_x, c_y) : **principal point** ((0,0) unless optical axis doesn't intersect projection plane at origin)

Focal length

- Can think of as “zoom”



24mm



50mm



200mm



800mm



- Related to *field of view*

Projection matrix

$$\mathbf{\Pi} = \mathbf{K} \underbrace{\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix}}_{\text{projection}} \underbrace{\begin{bmatrix} \mathbf{R} & \begin{matrix} 0 \\ 0 \\ 0 \end{matrix} \\ 0 & 0 & 0 & 1 \end{bmatrix}}_{\text{rotation}} \underbrace{\begin{bmatrix} \mathbf{I}_{3 \times 3} & -\mathbf{c} \\ 0 & 0 & 0 & 1 \end{bmatrix}}_{\text{translation}}$$


$$\left[\mathbf{R} \mid \underbrace{-\mathbf{R}\mathbf{c}} \right]$$

(\mathbf{t} in book's notation)




$$\mathbf{\Pi} = \mathbf{K} \left[\mathbf{R} \mid -\mathbf{R}\mathbf{c} \right]$$

Projection matrix

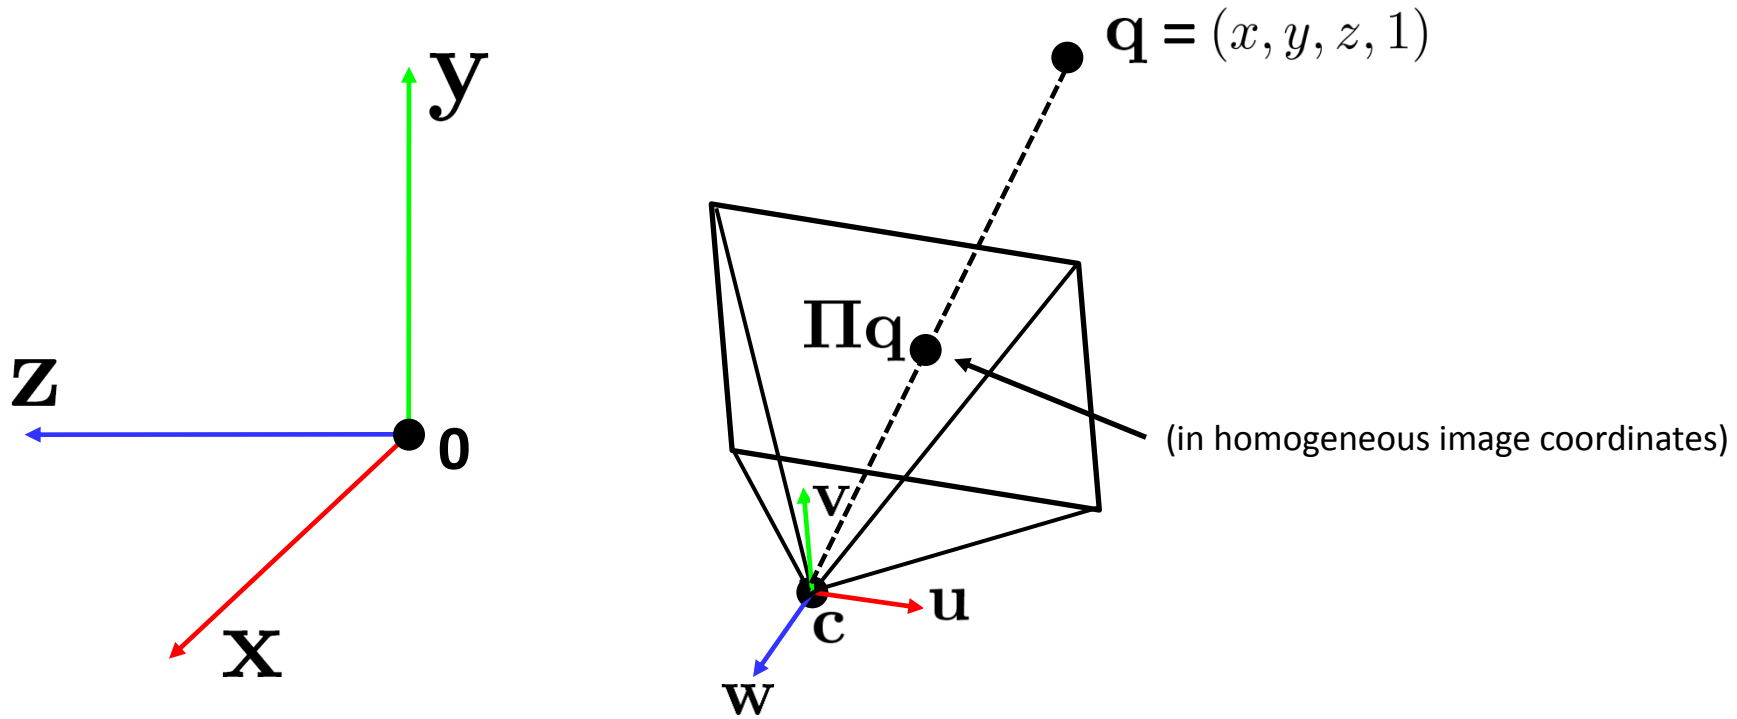

Distortion

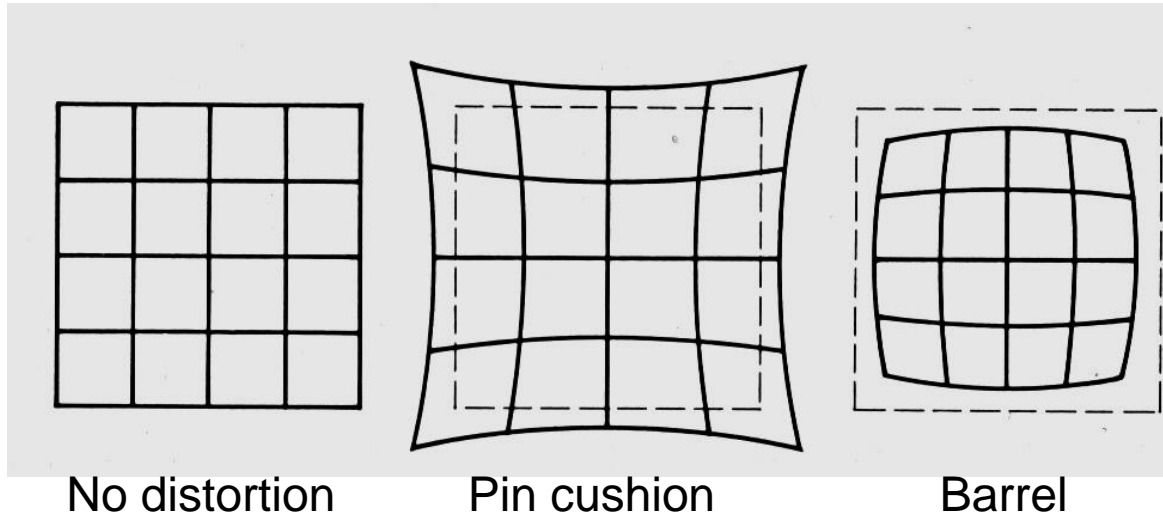

Radial distortion of the image

- Caused by imperfect lenses
- Deviations are most noticeable for rays that pass through the edge of the lens


Correcting radial distortion






from [Helmut Dersch](#)





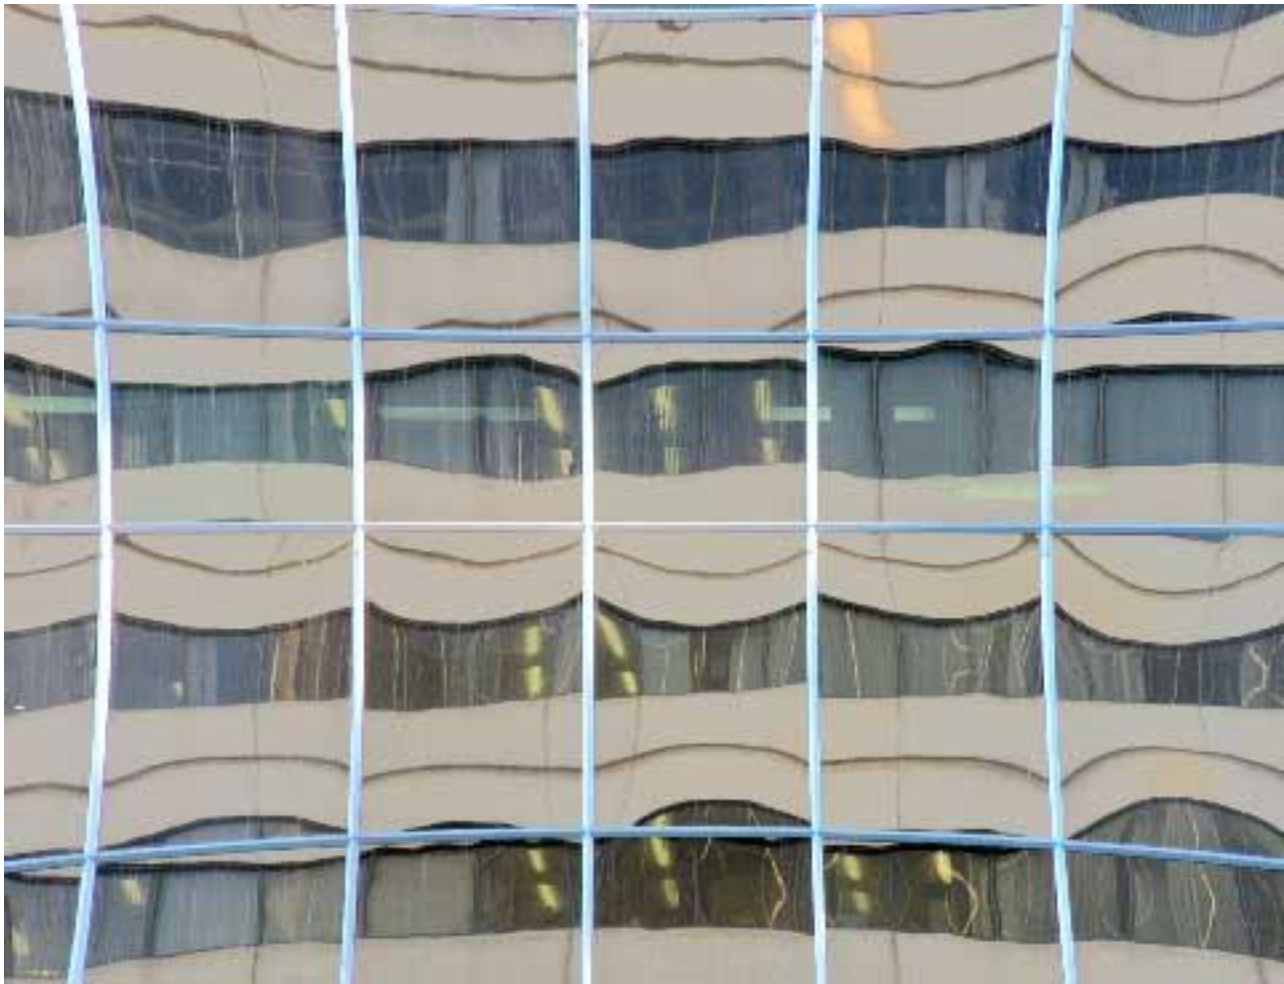

Distortion

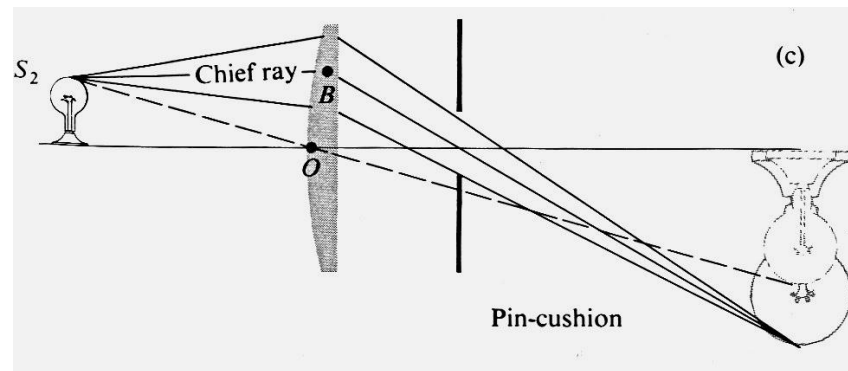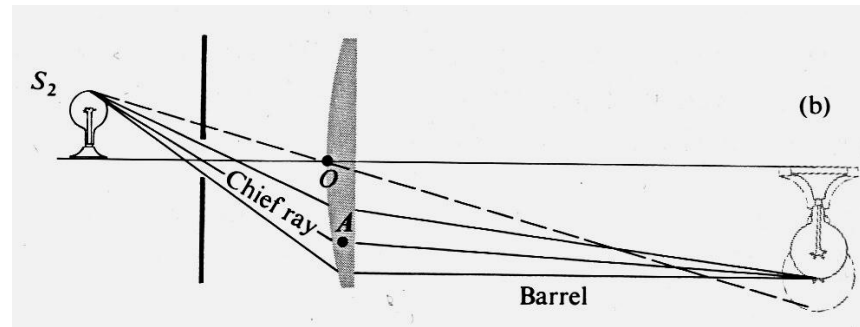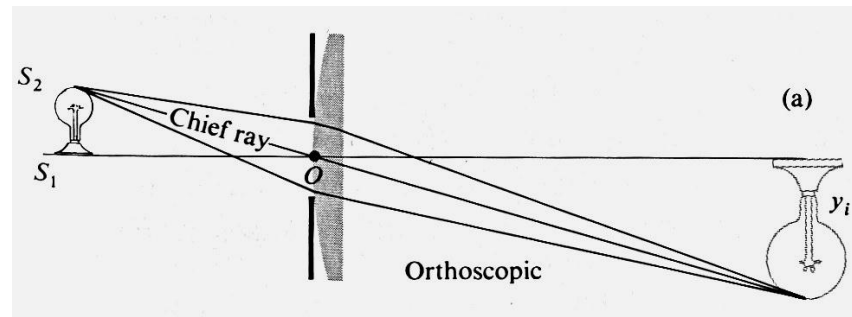

Modeling distortion

Project $(\hat{x}, \hat{y}, \hat{z})$
to “normalized”
image coordinates

$$x'_n = \hat{x} / \hat{z}$$
$$y'_n = \hat{y} / \hat{z}$$

Apply radial distortion

$$r^2 = x_n'^2 + y_n'^2$$
$$x'_d = x'_n (1 + \kappa_1 r^2 + \kappa_2 r^4)$$
$$y'_d = y'_n (1 + \kappa_1 r^2 + \kappa_2 r^4)$$

Apply focal length
translate image center

$$x' = f x'_d + x_c$$
$$y' = f y'_d + y_c$$

To model lens distortion

- Use above projection operation instead of standard projection matrix multiplication

Many other types of projection exist...

360 degree field of view...



Basic approach

- Take a photo of a parabolic mirror with an orthographic lens (Nayar)
- Or buy one a lens from a variety of omnicam manufacturers...
 - See <http://www.cis.upenn.edu/~kostas/omni.html>

Tilt-shift




http://www.northlight-images.co.uk/article_pages/tilt_and_shift_ts-e.html



Tilt-shift images from [Olivo Barbieri](#)
and Photoshop [imitations](#)

Rotating sensor (or object)

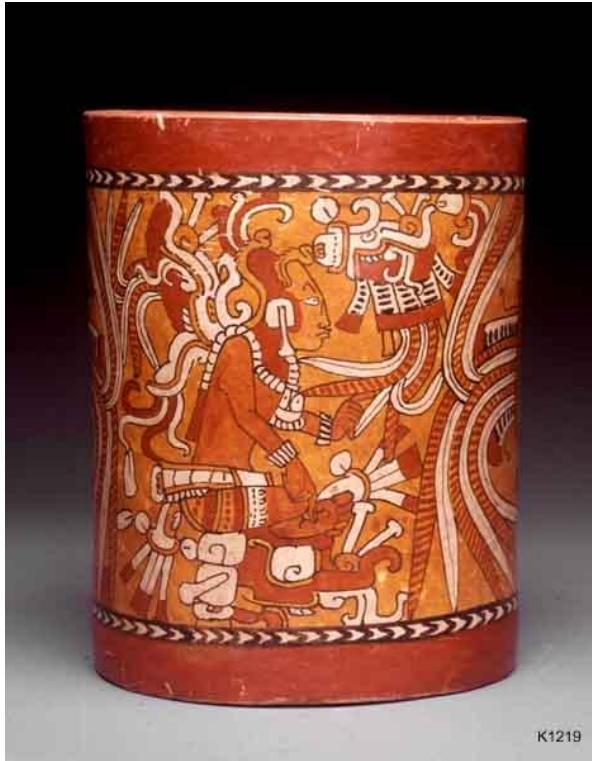


Rollout Photographs © Justin Kerr
<http://research.famsi.org/kerrmaya.html>

Also known as “cyclographs”, “peripheral images”

Photofinish

The 2000 Sydney Olympic Games - 200m Women Final

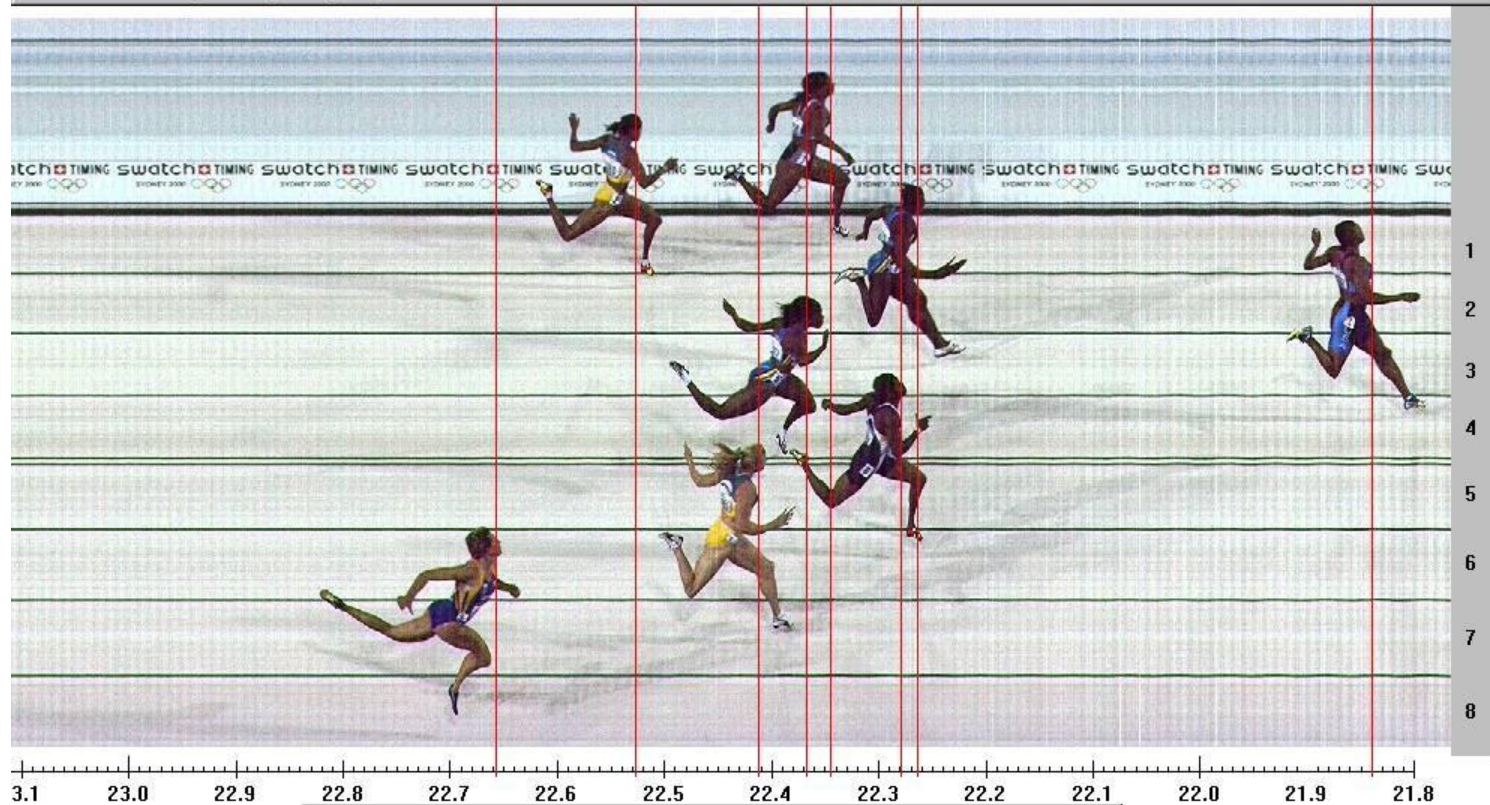

Rank	La	Bib	Nu		Time	R_time
1.	4	3357	Jones Marion	USA	21.84	0.174
2.	3	1174	Davis-Thompson Pauline	BAH	22.27	0.185
3.	6	3058	Jayasinghe Susanthika	SRI	22.28	0.207
4.	1	2291	McDonald Beverly	JAM	22.35	0.151
5.	5	1178	Ferguson Debbie	BAH	22.37	0.196
6.	7	1111	Gainsford-Taylor Melinda	AUS	22.42	0.178
7.	2	1110	Freeman Cathy	AUS	22.53	0.235
8.	8	3239	Pintusevych Zhanna	UKR	22.66	0.190

Start: 28. 9.2000 19:57:19.033 @414
 Print: 28. 9.2000 20:00:54 @417

Scan'O'Vision Color
 Race ID: W200FI00

swatch TIMING

Photo credit: © 2000 Swatch Timing Ltd.
 All rights reserved
 If this photo is used for any
 commercial purpose, layout and copy
 have to be submitted to any
 recognizable person prior to release.
 The producer does not assume
 any responsibility.