

Topics in Articulated Animation

Reading

Shoemake, "Quaternions Tutorial"


2

Animation

Articulated models:

- rigid parts
- connected by joints

They can be animated by specifying the joint angles (or other display parameters) as functions of time.

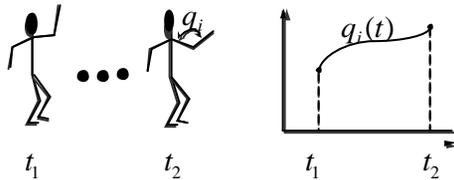

3

Character Representation

Character Models are rich, complex

- hair, clothes (particle systems)
- muscles, skin (FFD's *etc.*)

Focus is rigid-body Degrees of Freedom (DOFs)

- joint angles

4

Simple Rigid Body Skeleton



Copyright © Squaresoft 1999

vs.



5

Kinematics and dynamics

Kinematics: how the positions of the parts vary as a function of the joint angles.

Dynamics: how the positions of the parts vary as a function of applied forces.

6

Key-frame animation


- Each joint specified at various **key frames** (not necessarily the same as other joints)
- System does interpolation or **in-betweening**

Doing this well requires:

- A way of smoothly interpolating key frames: **splines**
- A good interactive system
- A lot of skill on the part of the animator

7

Efficient Skeleton: Hierarchy



- each bone relative to parent
- easy to limit joint angles

8

Computing a Sensor Position

Forward kinematics

- uses vector-matrix multiplication
- transformation matrix is composition of all joint transforms between sensor/effector and root

$$\mathbf{v}_w = \mathbf{T}(x_h, y_h, z_h) \mathbf{R}(\theta_h, \phi_h, \sigma_h) \mathbf{TR}(\theta_t, \phi_t, \sigma_t) \mathbf{TR}(\theta_c) \mathbf{TR}(\theta_f, \phi_f) \mathbf{v}_s$$

9

Joints = Rotations

To specify a pose, we specify the joint-angle rotations

Each joint can have up to three rotational DOFs

1 DOF: knee

2 DOF: wrist

3 DOF: arm

10

Euler angles

An Euler angle is a rotation about a single Cartesian axis

Create multi-DOF rotations by concatenating Eulers

Can get three DOF by concatenating:

Euler-X

Euler-Y

Euler-Z

11

Singularities

What *is* a singularity?

- continuous subspace of parameter space all of whose elements map to same rotation

Why is this bad?

- induces **gimbal lock** - two or more axes align, results in loss of rotational DOFs (*i.e.* derivatives)

12


Singularities in Action

An object whose orientation is controlled by Euler rotation XYZ(, ,)

(0,0,0) : Okay



(0, ±90°, 0) : X and Z axes align




13

Eliminates a DOF

In this configuration, changing (X Euler angle) and (Z Euler angle) produce the same result.

No way to rotate around world X axis!


(Z-rot)



(Y-rot)




(X-rot)



14

Resulting Behavior



No applied force or other stimuli can induce rotation about world X-axis

The object locks up!!

15

Singularities in Euler Angles

Cannot be avoided (occur at 0° or 90°)

Difficult to work around

But, only affects three DOF rotations

16

Other Properties of Euler Angles

Several important tasks are easy:

- interactive specification (sliders, *etc.*)
- joint limits
- Euclidean interpolation (Hermite, Bezier, *etc.*)
 - May be funky for tumbling bodies
 - fine for most joints

17

Quaternions

But... singularities are unacceptable for IK, optimization

Traditional solution: Use unit quaternions to represent rotations

- S^3 has same topology as rotation space (a sphere), so no singularities

18

History of Quaternions

Invented by Sir William Rowan Hamilton in 1843

$$H = w + i x + j y + k z$$

where $i^2 = j^2 = k^2 = ijk = -1$

I still must assert that this discovery appears to me to be as important for the middle of the nineteenth century as the discovery of fluxions [the calculus] was for the close of the seventeenth.

Hamilton

[quaternions] ... although beautifully ingenious, have been an unmixed evil to those who have touched them in any way.

Thompson

19

Quaternion as a 4 vector

$$\mathbf{q} = \begin{pmatrix} w \\ x \\ y \\ z \end{pmatrix} = \begin{pmatrix} w \\ \mathbf{v} \end{pmatrix}$$

20

Axis-angle rotation as a quaternion

$$\mathbf{q} = \begin{pmatrix} w \\ x \\ y \\ z \end{pmatrix} = \begin{pmatrix} w \\ \mathbf{v} \end{pmatrix}$$


$$\mathbf{q} = \begin{pmatrix} \cos(\mathbf{q}/2) \\ \sin(\mathbf{q}/2)\mathbf{r} \end{pmatrix}$$



21

Unit Quaternions


$$\mathbf{q} = \begin{pmatrix} w \\ x \\ y \\ z \end{pmatrix}$$



$$w = \sqrt{1 - (x^2 + y^2 + z^2)}$$

$$|\mathbf{q}| = 1$$

$$x^2 + y^2 + z^2 + w^2 = 1$$



22

Quaternion Product

$$\begin{pmatrix} w_1 \\ \mathbf{v}_1 \end{pmatrix} \begin{pmatrix} w_2 \\ \mathbf{v}_2 \end{pmatrix} = \begin{pmatrix} w_1 w_2 - \mathbf{v}_1 \cdot \mathbf{v}_2 \\ w_1 \mathbf{v}_2 + w_2 \mathbf{v}_1 + \mathbf{v}_1 \times \mathbf{v}_2 \end{pmatrix}$$

$$\begin{pmatrix} w_1 \\ \mathbf{v}_1 \end{pmatrix} \begin{pmatrix} w_2 \\ \mathbf{v}_2 \end{pmatrix} \neq \begin{pmatrix} w_2 \\ \mathbf{v}_2 \end{pmatrix} \begin{pmatrix} w_1 \\ \mathbf{v}_1 \end{pmatrix}$$

23

Quaternion Conjugate

$$\mathbf{q}^* = \begin{pmatrix} w_1 \\ \mathbf{v}_1 \end{pmatrix}^* = \begin{pmatrix} w_1 \\ -\mathbf{v}_1 \end{pmatrix}$$

$$(\mathbf{p}^*)^* = \mathbf{p}$$

$$(\mathbf{p}\mathbf{q})^* = \mathbf{q}^* \mathbf{p}^*$$

$$(\mathbf{p} + \mathbf{q})^* = \mathbf{p}^* + \mathbf{q}^*$$

24


Quaternion Inverse

$$\mathbf{q}^{-1}\mathbf{q} = 1$$

$$\mathbf{q}^{-1} = \mathbf{q}^* / |\mathbf{q}| = \begin{pmatrix} w \\ -\mathbf{v} \end{pmatrix} / |\mathbf{q}| = \begin{pmatrix} w \\ -\mathbf{v} \end{pmatrix} / (w^2 + \mathbf{v} \cdot \mathbf{v})$$

25

Quaternion Rotation



$$\mathbf{q}\mathbf{p}\mathbf{q}^{-1} = \begin{pmatrix} w \\ \mathbf{v} \end{pmatrix} \begin{pmatrix} 0 & w \\ \mathbf{p} & -\mathbf{v} \end{pmatrix} \begin{pmatrix} w \\ -\mathbf{v} \end{pmatrix}$$

$$= \begin{pmatrix} w \\ \mathbf{v} \end{pmatrix} \begin{pmatrix} \mathbf{p} \cdot \mathbf{v} \\ w\mathbf{p} - \mathbf{p} \times \mathbf{v} \end{pmatrix}$$


$$= \begin{pmatrix} w\mathbf{p} \cdot \mathbf{v} - w\mathbf{p} \cdot \mathbf{v} = 0 \\ w(w\mathbf{p} - \mathbf{p}\mathbf{v}) + (\mathbf{p} \cdot \mathbf{v})\mathbf{v} + \mathbf{v}(w\mathbf{p} - \mathbf{p} \times \mathbf{v}) \end{pmatrix}$$

What about a quaternion product $\mathbf{q}_1\mathbf{q}_2$?

26

Quaternion constraints

Restricting the rotation cone



$$\frac{1 - \cos(\mathbf{q}_z)}{2} = q_y^2 + q_z^2$$

Restricting the rotation twist around an axis



$$\tan(\mathbf{q} / 2) = \frac{q_{axis}}{q_w}$$

27

Matrix Form

$$\mathbf{q} = \begin{pmatrix} w \\ x \\ y \\ z \end{pmatrix}$$

$$\mathbf{M} = \begin{pmatrix} 1 - 2y^2 - 2z^2 & 2xy + 2wz & 2xz - 2wy \\ 2xy - 2wz & 1 - 2x^2 - 2z^2 & 2yz + 2wx \\ 2xz + 2wy & 2yz - 2wx & 1 - 2x^2 - 2y^2 \end{pmatrix}$$

28

Quaternions: What Works

Simple formulae for converting to rotation matrix

Continuous derivatives - no singularities

“Optimal” interpolation - geodesics map to shortest paths in rotation space

Nice calculus (corresponds to rotations)

29

What Hierarchies Can and Can't Do

Advantages:

- Reasonable control knobs
- Maintains structural constraints

Disadvantages:

- Doesn't always give the “right” control knobs
 - e.g. hand or foot position - re-rooting may help
- Can't do closed kinematic chains (keep hand on hip)
- Other constraints: do not walk through walls


30

Procedural Animation

Transformation parameters as functions of other variables

Simple example:

- a clock with second, minute and hour hands
- hands should rotate together
- express all the motions in terms of a “seconds” variable
- whole clock is animated by varying the seconds parameter

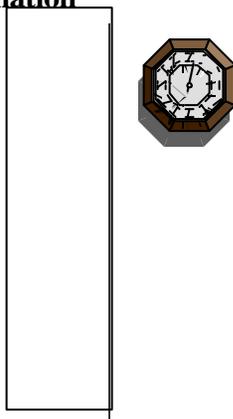

31

Models as Code: draw-a-bug


```
void draw_bug(walk_phase_angle, xpos, ypos, zpos){
  pushmatrix
  translate(xpos, ypos, zpos)
  calculate all six sets of leg angles based on
  walk phase angle.
  draw bug body
  for each leg:
    pushmatrix
    translate(leg pos relative to body)
    draw_bug_leg(theta1&theta2 for that leg)
    popmatrix
  popmatrix
}

void draw_bug_leg(float theta1, float theta2){
  glPushMatrix();
  glRotatef(theta1, 0, 0, 1);
  draw_leg_segment(SEGMENT1_LENGTH)
  glTranslatef(SEGMENT1_LENGTH, 0, 0);
  glRotatef(theta2, 0, 0, 1);
  draw_leg_segment(SEGMENT2_LENGTH)
  glPopMatrix();
}
```

32

Hard Example

In the figure below, what expression would you use to calculate the arm's rotation angle to keep the tip on the star-shaped wheel as the wheel rotates???



33