



# Introduction to Computer Networks

## Network Layer Overview




## Where we are in the Course

- Starting the Network Layer!
  - Builds on the link layer. Routers send packets over multiple networks



## Why do we need a Network layer?


- We can already build networks with links and switches and send frames between hosts ...



- Question: what are the downsides of using link layer solutions (switches) to connect all of the Internet?

## Shortcomings of Switches


- Don't scale to large networks
  - Blow up of routing table, broadcast

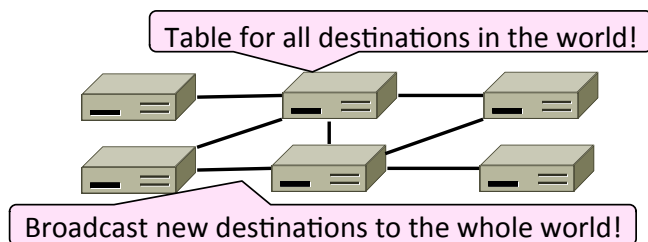

## Shortcomings of Switches (2)

### 2. Don't work across more than one link layer technology


- Hosts on Ethernet + 3G + 802.11 ...

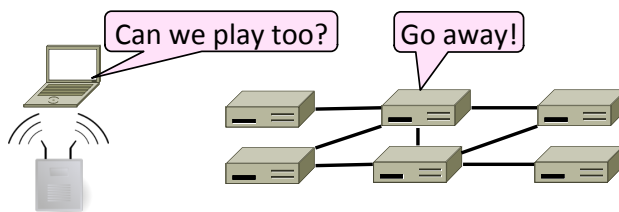

## Shortcomings of Switches (3)

### 3. Don't give much traffic control

- Want to plan routes / bandwidth

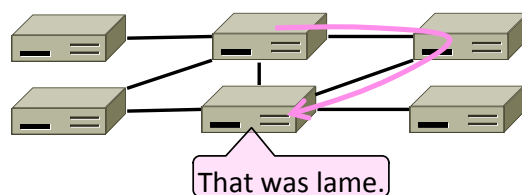


## Network Layer Approach

- Scaling:
  - Hierarchy, in the form of prefixes
- Heterogeneity:
  - IP for internetworking
- Bandwidth Control:
  - Lowest-cost routing
  - Later QOS (Quality of Service)


## Routing vs. Forwarding

- Routing is the process of deciding in which direction to send traffic
  - Network wide (global) and expensive

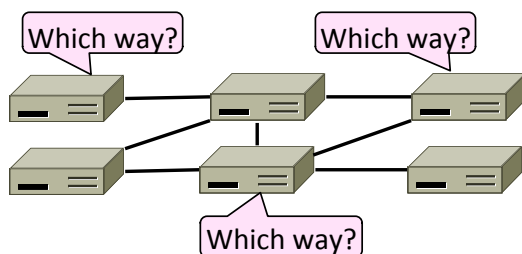

## Routing vs. Forwarding (2)

- Forwarding is the process of sending a packet on its way
  - Node process (local) and fast

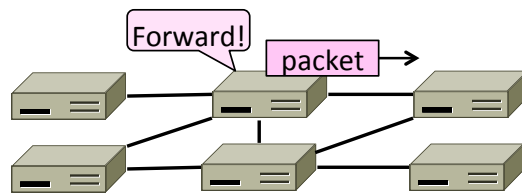

## Introduction to Computer Networks

### Network Services (§5.1)



Computer Science & Engineering

UNIVERSITY of WASHINGTON

## Two Network Service Models

- Datagrams, or connectionless service

- Like postal letters
- (This one is IP)



- Virtual circuits, or connection-oriented service

- Like a telephone call




## Store-and-Forward Packet Switching

- Both models are implemented with store-and-forward packet switching
  - Routers receive a complete packet, storing it temporarily if necessary before forwarding it onwards
  - We use statistical multiplexing to share link bandwidth over time


## Datagram Model

- Packets contain a destination address; each router uses it to forward each packet, possibly on different paths

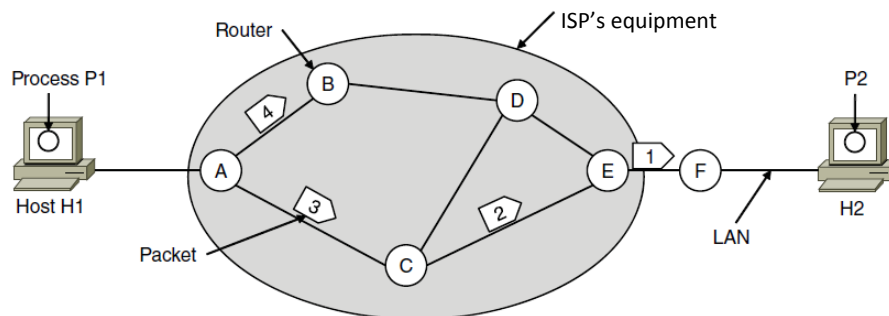


## Datagram Model (2)

- Each router has a forwarding table keyed by address
  - Gives next hop for each destination address; may change

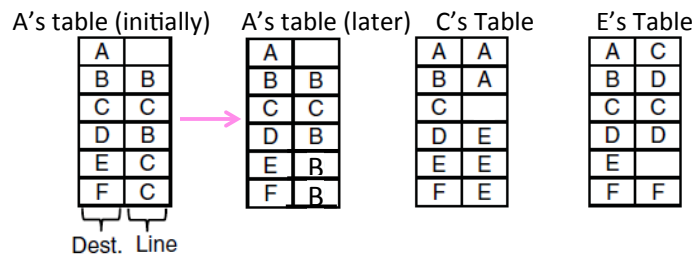

## IP (Internet Protocol)

- Network layer of the Internet, uses datagrams (next)
  - IPv4 carries 32 bit addresses on each packet (often 1.5 KB)

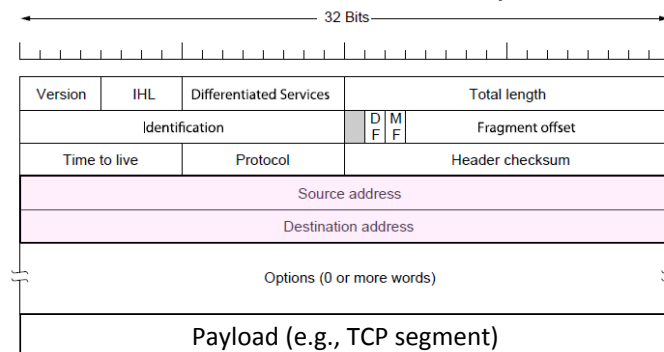


## Virtual Circuit Model

- Three phases:
  1. Connection establishment, circuit is set up
    - Path is chosen, circuit information stored in routers
  2. Data transfer, circuit is used
    - Packets are forwarded along the path
  3. Connection teardown, circuit is deleted
    - Circuit information is removed from routers
- Just like a telephone circuit, but virtual in the sense that no bandwidth need be reserved; statistical sharing of links




## Virtual Circuits (2)

- Packets only contain a short label to identify the circuit
  - Labels don't have any global meaning, only unique for a link

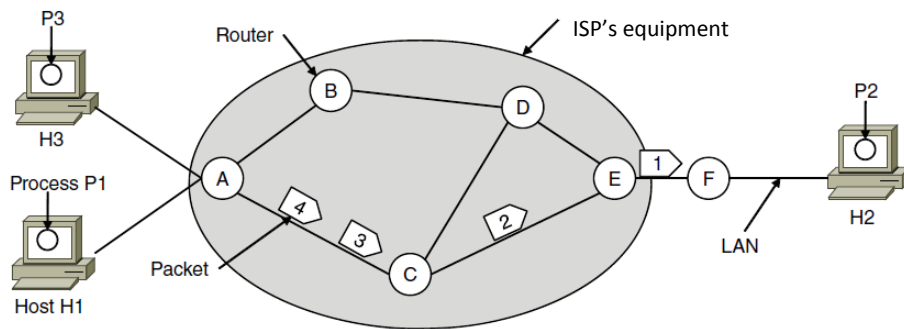


## Virtual Circuits (3)

- Each router has a forwarding table keyed by circuit
  - Gives output line and next label to place on packet

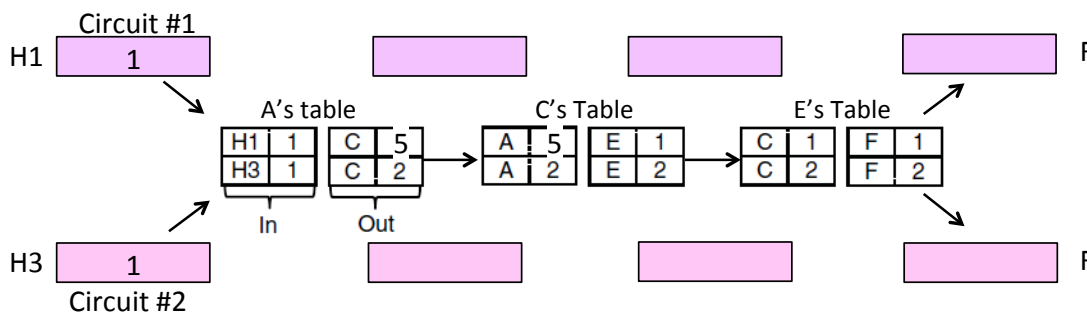


## Virtual Circuits (4)

- Each router has a forwarding table keyed by circuit
  - Gives output line and next label to place on packet

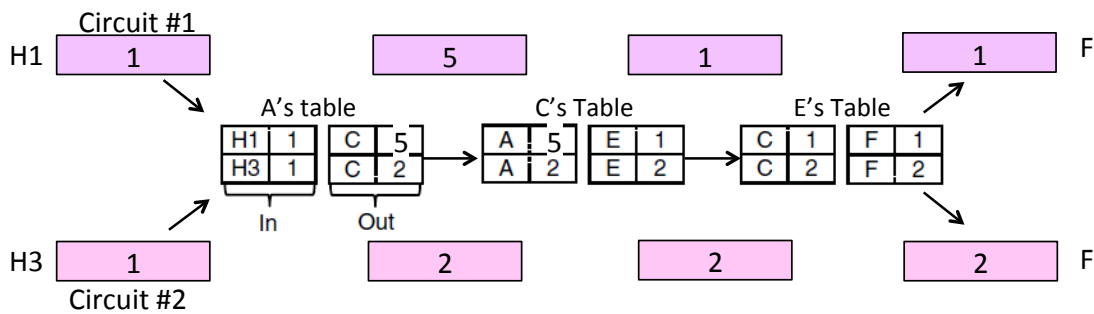

## MPLS (Multi-Protocol Label Switching, §5.6.5)

- A virtual-circuit like technology widely used by ISPs
  - ISP sets up circuits inside their backbone ahead of time
  - ISP adds MPLS label to IP packet at ingress, undoes at egress

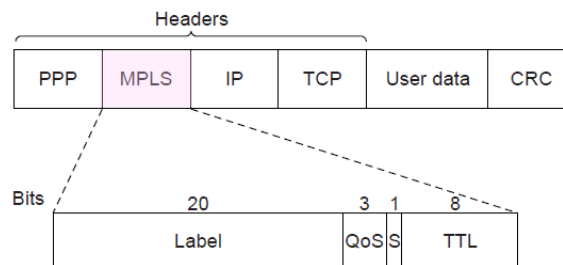


## Datagrams vs Virtual Circuits

- Complementary strengths

Issue	Datagrams	Virtual Circuits
Setup phase	Not needed	Required
Router state	Per destination	Per connection
Addresses	Packet carries full address	Packet carries short label
Routing	Per packet	Per circuit
Failures	Easier to mask	Difficult to mask
Quality of service	Difficult to add	Easier to add


## Introduction to Computer Networks

Internetworking (§5.5, 5.6.1)



## Topic

- How do we connect different networks together?
  - This is called internetworking
  - We'll look at how IP does it

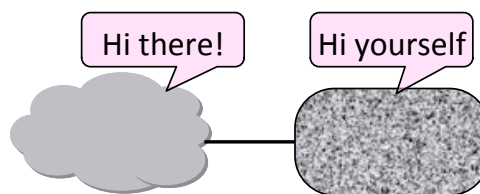


## How Networks May Differ

- Basically, in a lot of ways:
  - Service model (datagrams, VCs)
  - Addressing (what kind)
  - QOS (priorities, no priorities)
  - Packet sizes
  - Security (whether encrypted)
- Internetworking hides the differences with a common protocol. (Uh oh.)

## Connecting Datagram and VC networks

- An example to show that it's not so easy
  - Need to map destination address to a VC and vice-versa
  - A bit of a “road bump”, e.g., might have to set up a VC

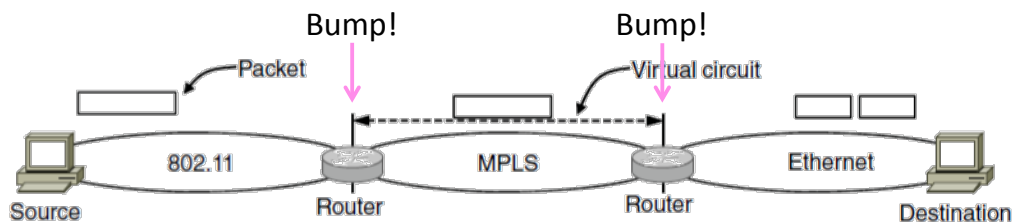


CSE 461 University of Washington

25

## Internet Reference Model

- IP is the “narrow waist” of the Internet
  - Supports many different links below and apps above

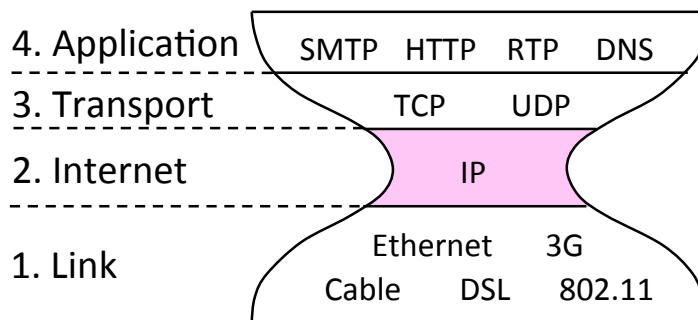

CSE 461 University of Washington


26

## IP as a Lowest Common Denominator

- Suppose only some networks support QOS or security etc.
  - Difficult for internetwork to support
- Pushes IP to be a “lowest common denominator” protocol
  - Asks little of lower-layer networks
  - Gives little as a higher layer service


## IPv4 (Internet Protocol)

- Various fields to meet straightforward needs
  - Version, Header (IHL) and Total length, Protocol, and Header Checksum

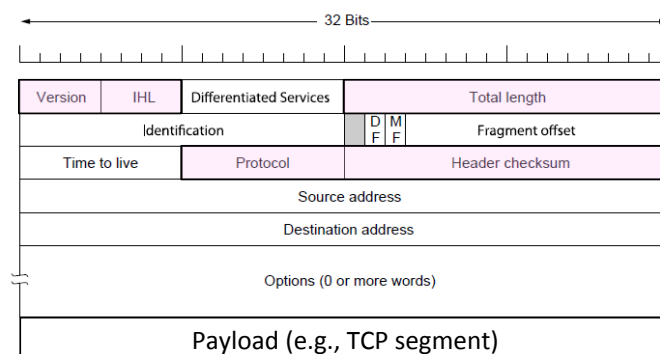

## IPv4 (2)

- Network layer of the Internet, uses datagrams
  - Provides a layer of addressing above link addresses (next)

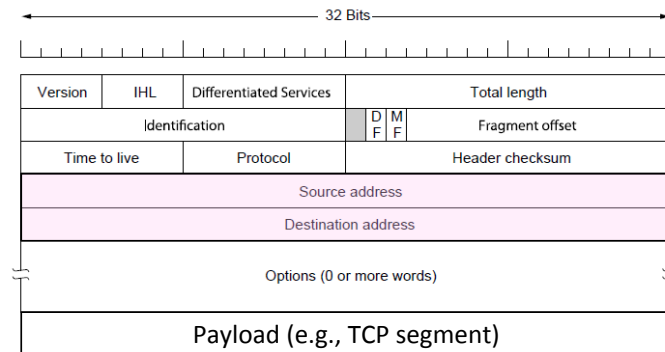


CSE 461 University of Washington

29

## IPv4 (3)

- Some fields to handle packet size differences (later)
  - Identification, Fragment offset, Fragment control bits

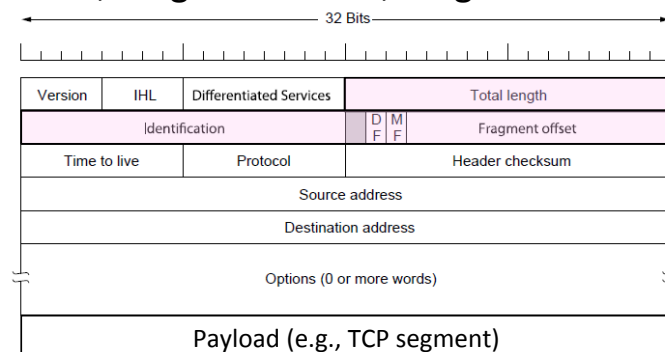


CSE 461 University of Washington

30

## IPv4 (4)

- Other fields to meet other needs (later, later)
  - Differentiated Services, Time to live (TTL)

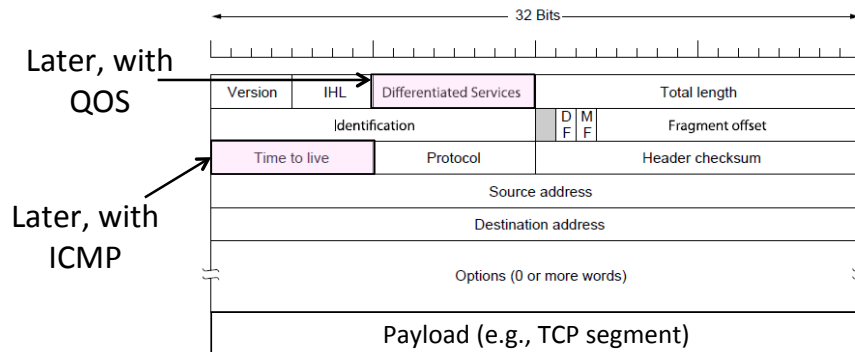

## Introduction to Computer Networks

### IP Forwarding (§5.6.1-5.6.2)



Computer Science & Engineering

UNIVERSITY of WASHINGTON




## IP Addresses

- IPv4 uses 32-bit addresses
  - Later we'll see IPv6, which uses 128-bit addresses
- Written in “dotted quad” notation
  - Four 8-bit numbers separated by dots

8 bits      8 bits      8 bits      8 bits  
 aaaaaaaaaabbbbbbbbbbcccccccccddddddd ↔ A . B . C . D  
 00010010|00011111|00000000|00000001 ↔


## IP Prefixes

- Addresses are allocated in blocks called prefixes
  - Addresses in an L-bit prefix have the same top L bits
  - There are  $2^{32-L}$  addresses aligned on  $2^{32-L}$  boundary

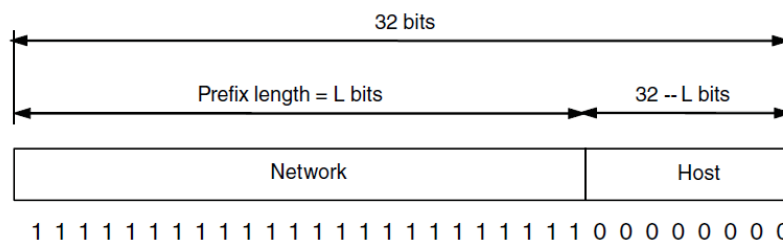


## IP Prefixes (2)

- Written in “address/length” notation
  - Address is lowest address in the prefix, length is prefix bits
  - E.g., 128.13.0.0/16 is 128.13.0.0 to 128.13.255.255
  - So a /24 (“slash 24”) is 256 addresses, and a /32 is one address

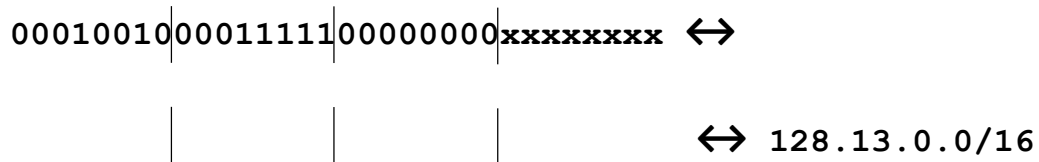

## Classful IP Addressing


- Originally, IP addresses came in fixed size blocks with the class/size encoded in the high-order bits
  - They still do, but the classes are now ignored

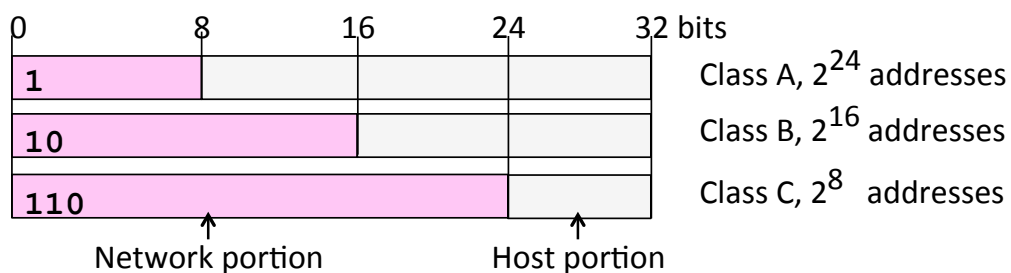

## IP Forwarding

- All addresses on one network belong to the same prefix
- Node uses a table that lists the next hop for prefixes


Prefix	Next Hop
192.24.0.0/19	D
192.24.12.0/22	B



## Longest Matching Prefix

- Prefixes in the table might overlap!
  - Combines hierarchy with flexibility
- Longest matching prefix forwarding rule:
  - For each packet, find the longest prefix that contains the destination address, i.e., the most specific entry
  - Forward the packet to the next hop router for that prefix

## Longest Matching Prefix (2)

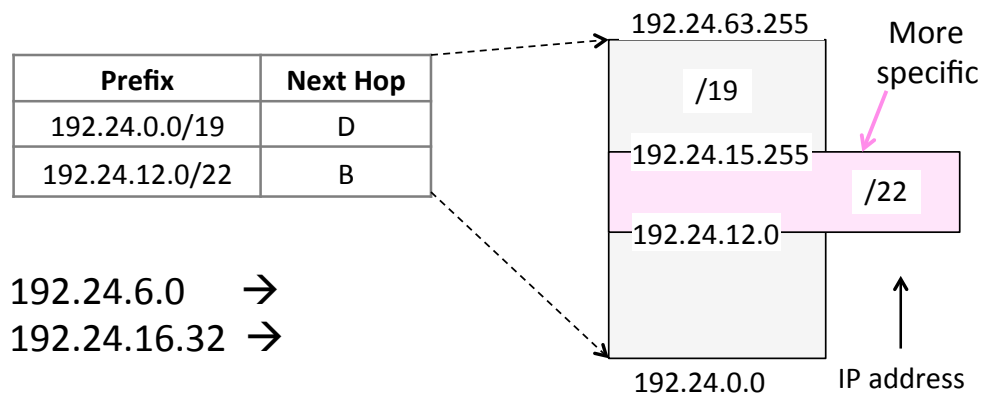

## Flexibility of Longest Matching Prefix

- Can provide default behavior, with less specifics
  - To send traffic going outside an organization to a border router
- Can special case behavior, with more specifics
  - For performance, economics, security, ...

## Performance of Longest Matching Prefix

- Uses hierarchy for a compact table
  - Relies on use of large prefixes
- Lookup more complex than table
  - Used to be a concern for fast routers
  - Not an issue in practice these days

## Introduction to Computer Networks

Helping IP with ARP, DHCP  
(§5.6.4)




Computer Science & Engineering

UNIVERSITY *of* WASHINGTON

## Topic

- Filling in the gaps we need to make for IP forwarding work in practice
  - Getting IP addresses (DHCP) »
  - Mapping IP to link addresses (ARP) »

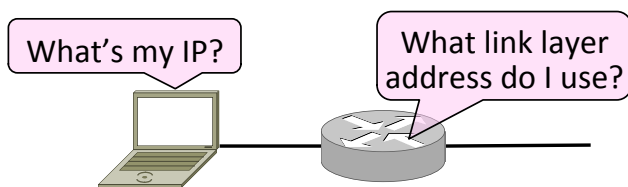


## Getting IP Addresses

- Problem:
  - A node wakes up for the first time ...
  - What is its IP address? What's the IP address of its router? Etc.
  - At least Ethernet address is on NIC



## Getting IP Addresses (2)

1. Manual configuration (old days)
  - Can't be factory set, depends on use
2. A protocol for automatically configuring addresses (DHCP)
  - Shifts burden from users to IT folk

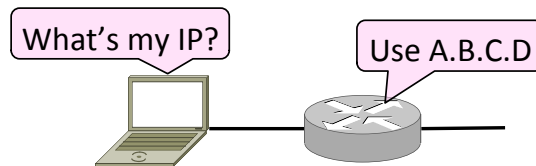


## DHCP

- DHCP (Dynamic Host Configuration Protocol), from 1993, widely used
- It leases IP address to nodes
- Provides other parameters too
  - Network prefix
  - Address of local router
  - DNS server, time server, etc.

## DHCP Protocol Stack



- DHCP is a client-server application
  - Uses UDP ports 67, 68



## DHCP Addressing

- Bootstrap issue:
  - How does node send a message to DHCP server before it is configured?
- Answer:
  - Node sends broadcast messages that delivered to all nodes on the network
  - Broadcast address is all 1s
  - IP (32 bit): 255.255.255.255
  - Ethernet (48 bit): ff:ff:ff:ff:ff:ff



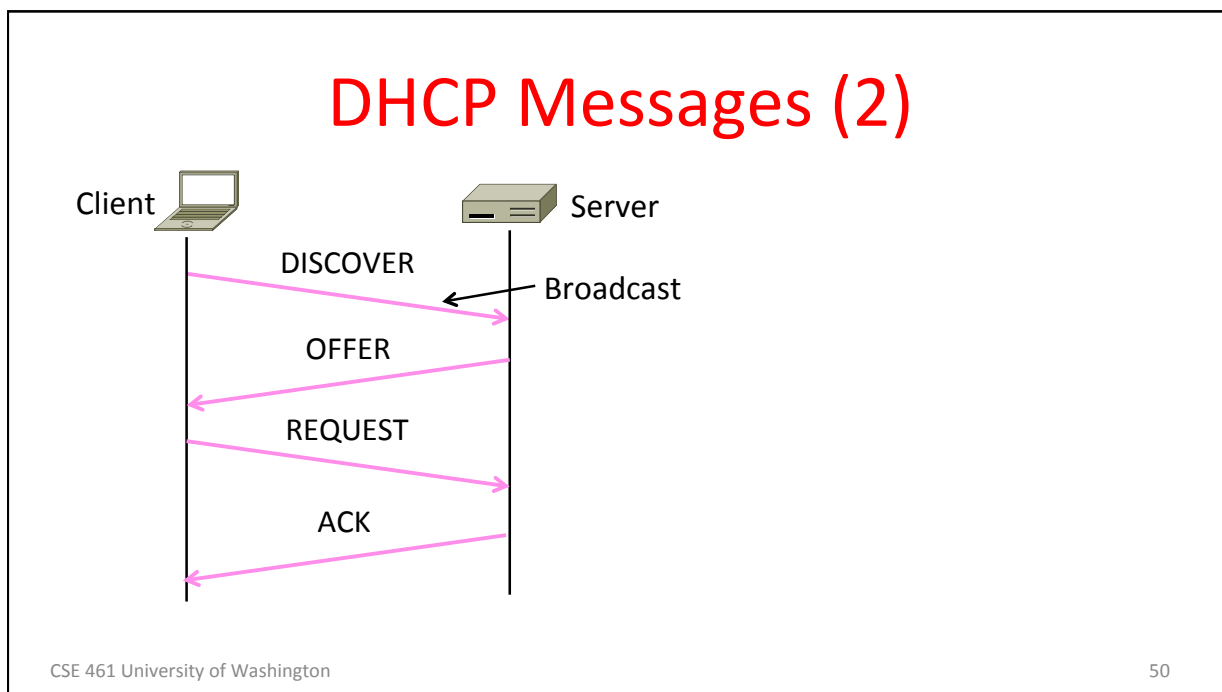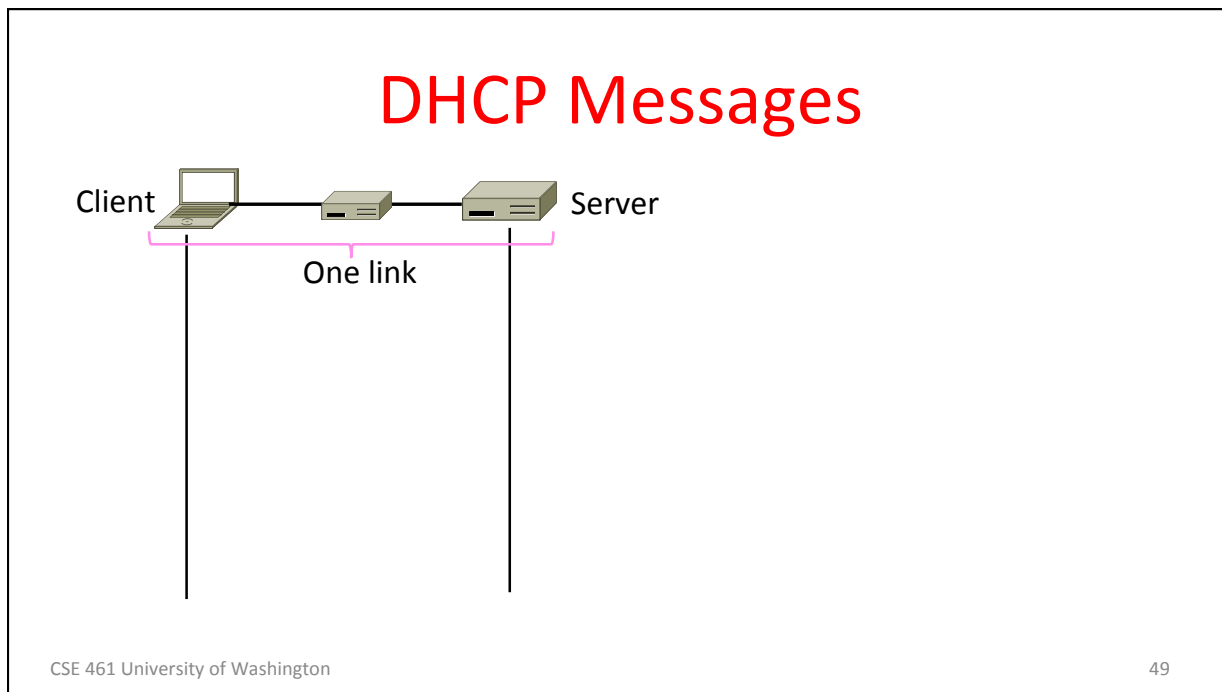


## DHCP Messages (3)

- To renew an existing lease, an abbreviated sequence is used:
  - REQUEST, followed by ACK
- Protocol also supports replicated servers for reliability


## Sending an IP Packet

- Problem:
  - A node needs Link layer addresses to send a frame over the local link
  - How does it get the destination link address from a destination IP address?

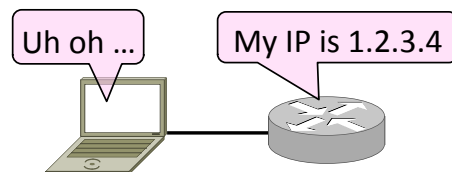


## ARP (Address Resolution Protocol)



- Node uses to map a local IP address to its Link layer addresses

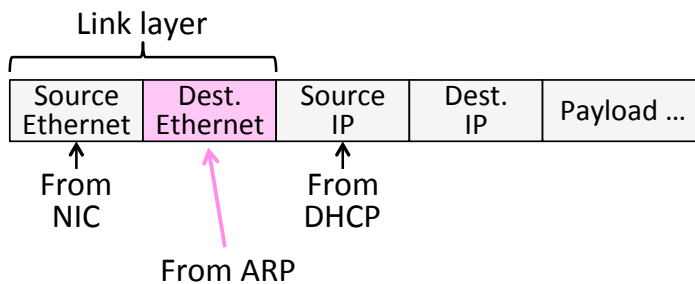

## ARP Protocol Stack


- ARP sits right on top of link layer
  - No servers, just asks node with target IP to identify itself
  - Uses broadcast to reach all nodes



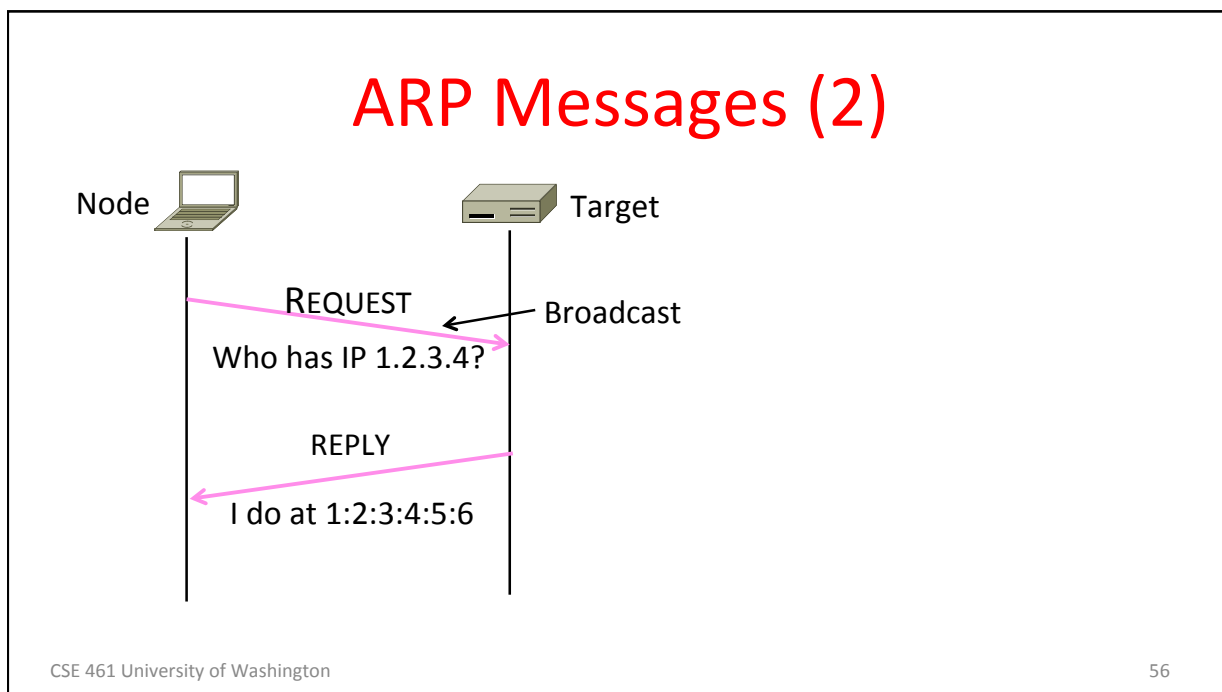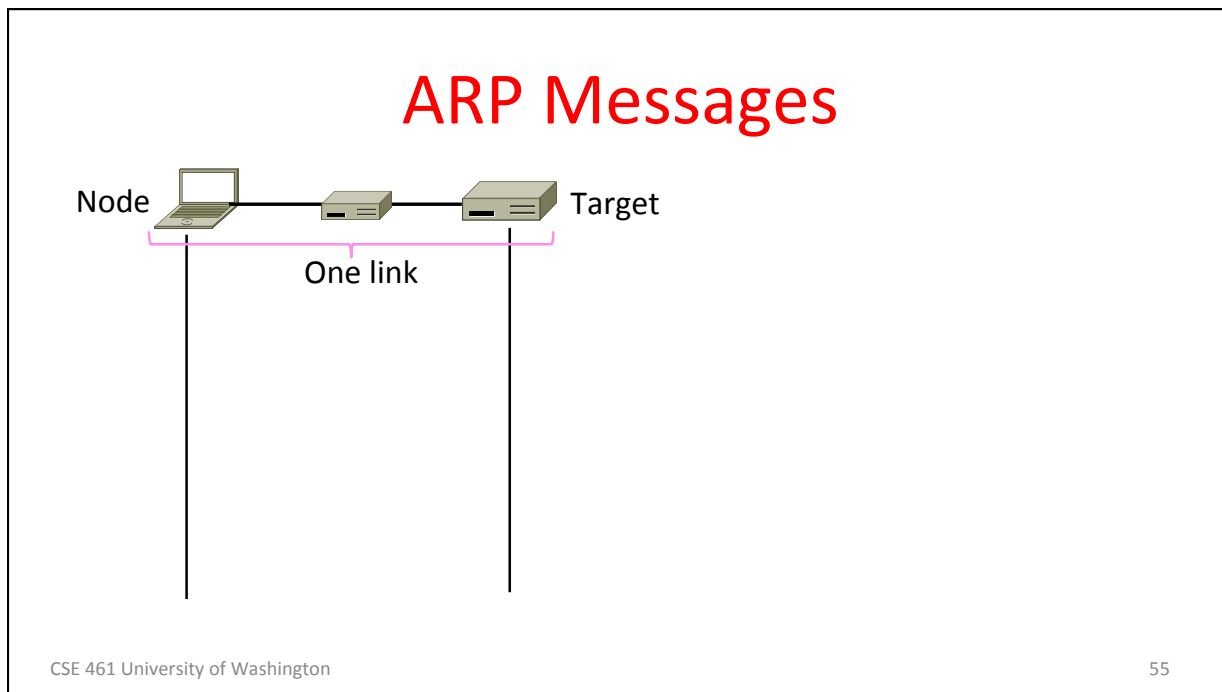


# Introduction to Computer Networks

## Packet Fragmentation (§5.5.5)



## Topic

- How do we connect networks with different maximum packet sizes?
  - Need to split up packets, or discover the largest size to use

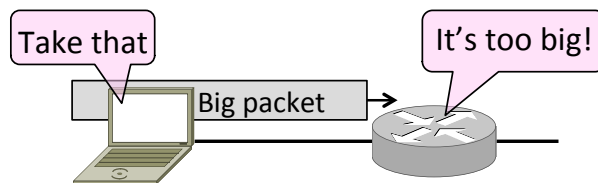

## Packet Size Problem


- Different networks have different maximum packet sizes
  - Or MTU (Maximum Transmission Unit)
  - E.g., Ethernet 1.5K, WiFi 2.3K
- Prefer large packets for efficiency
  - But what size is too large?
  - Difficult because node does not know complete network path

## Packet Size Solutions

- Fragmentation (now)
  - Split up large packets in the network if they are too big to send
  - Classic method, dated
- Discovery (next)
  - Find the largest packet that fits on the network path and use it
  - IP uses today instead of fragmentation

## IPv4 Fragmentation

- Routers fragment packets that are too large to forward
- Receiving host reassembles to reduce load on routers

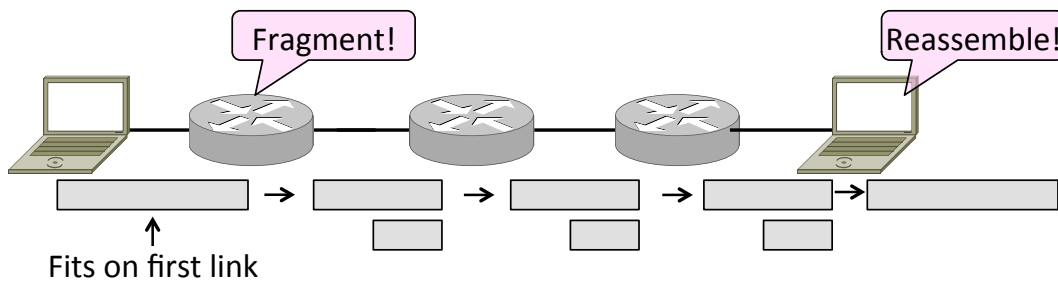


CSE 461 University of Washington

61

## IPv4 Fragmentation Fields

- Header fields used to handle packet size differences
  - Identification, Fragment offset, MF/DF control bits

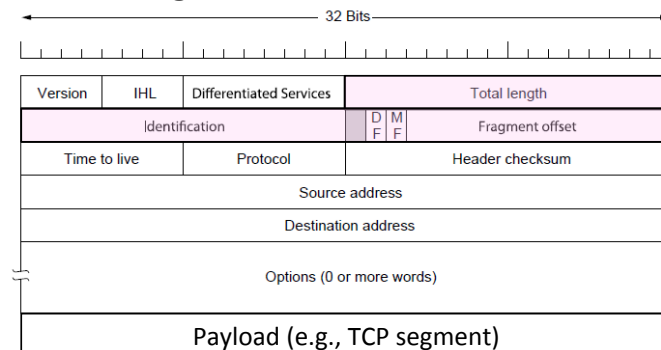

CSE 461 University of Washington

62


## IPv4 Fragmentation Procedure

- Routers split a packet that is too large:
  - Typically break into large pieces
  - Copy IP header to pieces
  - Adjust length on pieces
  - Set offset to indicate position
  - Set MF (More Fragments) on all pieces except last
- Receiving hosts reassembles the pieces:
  - Identification field links pieces together, MF tells receiver when it has all pieces

CSE 461 University of Washington

63

## IPv4 Fragmentation (3)

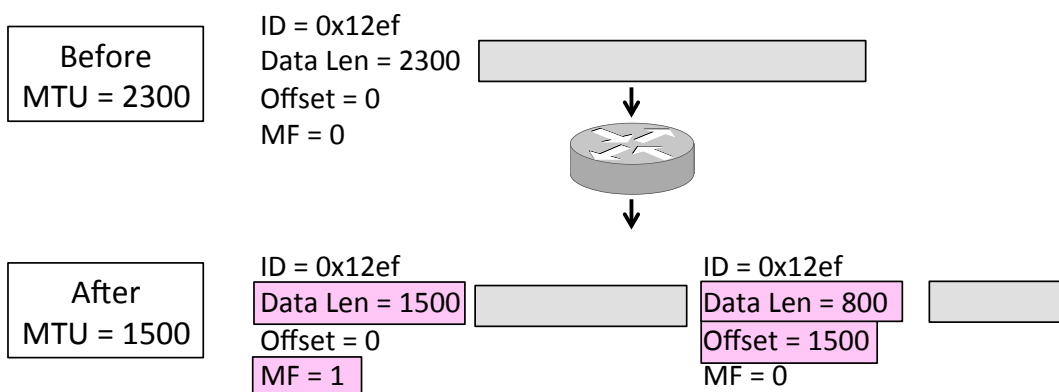

CSE 461 University of Washington

64




## IPv4 Fragmentation (4)

- It works!
  - Allows repeated fragmentation
- But fragmentation is undesirable
  - More work for routers, hosts
  - Tends to magnify loss rate
  - Security vulnerabilities too

## Path MTU Discovery

- Discover the MTU that will fit
  - So we can avoid fragmentation
  - The method in use today
- Host tests path with large packet
  - Routers provide feedback if too large; they tell host what size would have fit


## Path MTU Discovery (2)

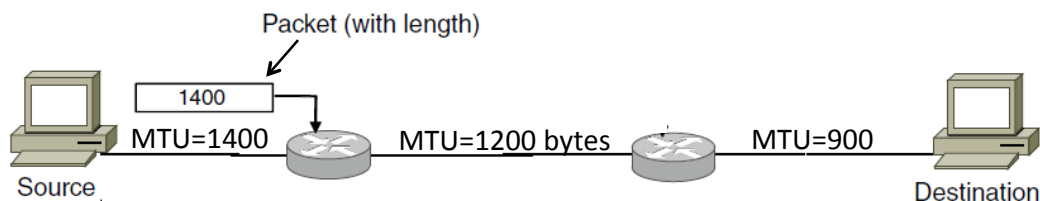

CSE 461 University of Washington

67

## Path MTU Discovery (3)

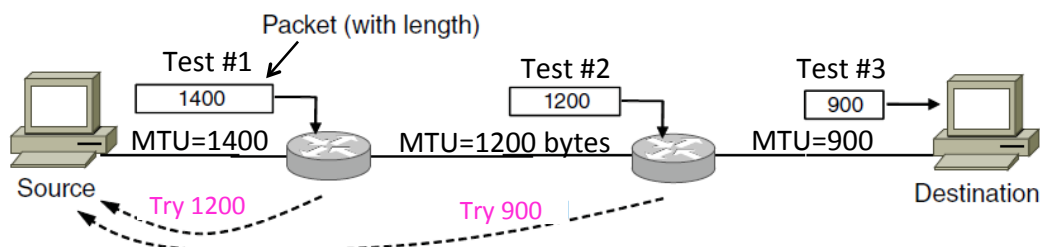

CSE 461 University of Washington

68

# Introduction to Computer Networks

## Error Handling with ICMP (§5.6.4)



Computer Science & Engineering


UNIVERSITY *of* WASHINGTON

## Internet Control Message Protocol

- ICMP is a companion protocol to IP
  - They are implemented together
  - Sits on top of IP (IP Protocol=1)
- Provides error report and testing
  - Error is at router while forwarding
  - Also testing that hosts can use

## ICMP Errors

- When router encounters an error while forwarding:
  - It sends an ICMP error report back to the IP source address
  - It discards the problematic packet; host needs to rectify

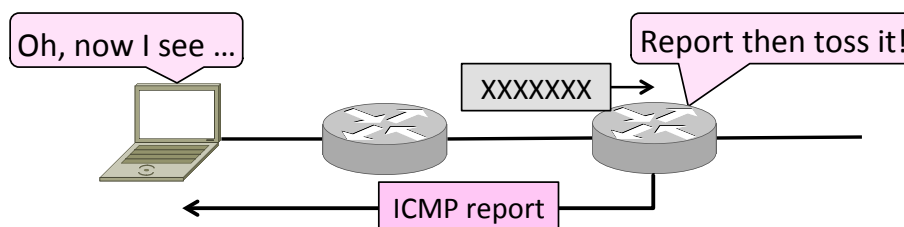

CSE 461 University of Washington

71

## ICMP Message Format


- Each ICMP message has a Type, Code, and Checksum
- Often carry the start of the offending packet as payload
- Each message is carried in an IP packet

CSE 461 University of Washington

72

## ICMP Message Format (2)

- Each ICMP message has a Type, Code, and Checksum
- Often carry the start of the offending packet as payload
- Each message is carried in an IP packet

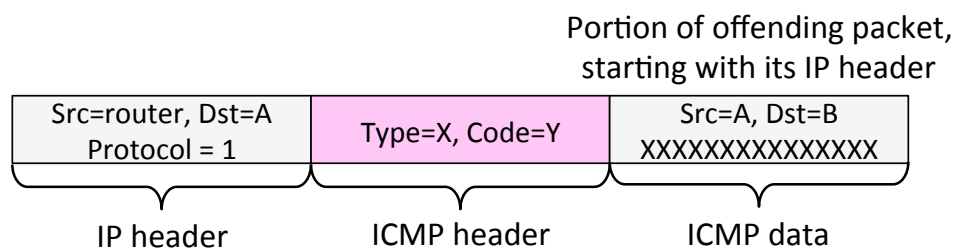

## Example ICMP Messages

Name	Type / Code	Usage
Dest. Unreachable (Net or Host)	3 / 0 or 1	Lack of connectivity
Dest. Unreachable (Fragment)	3 / 4	Path MTU Discovery
Time Exceeded (Transit)	11 / 0	Traceroute
Echo Request or Reply	8 or 0 / 0	Ping

Testing, not a forwarding error: Host sends Echo Request, and destination responds with an Echo Reply

# Introduction to Computer Networks

## IP Version 6 (§5.6.3)




Computer Science & Engineering

UNIVERSITY of WASHINGTON



## Internet Growth

- At least a billion Internet hosts and growing ...
- And we're using 32-bit addresses!

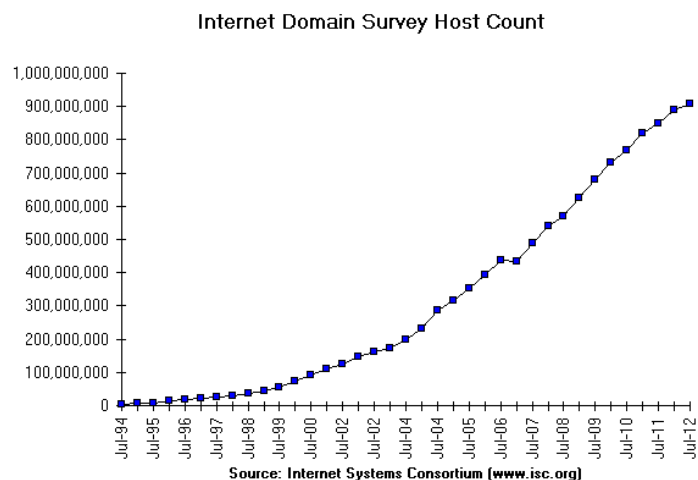

## The End of New IPv4 Addresses

- Now running on leftover blocks held by the regional registries; much tighter allocation policies

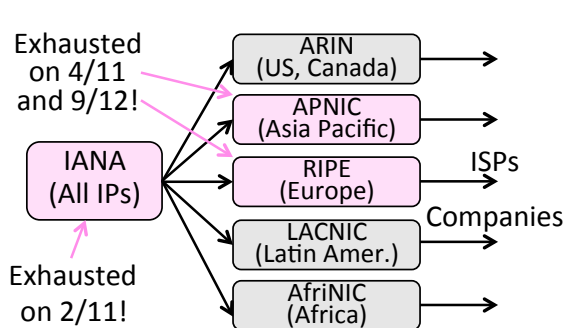


End of the world ? 12/21/12?

## IP Version 6 to the Rescue

- Effort started by the IETF in 1994
  - Much larger addresses (128 bits)
  - Many sundry improvements
- Became an IETF standard in 1998
  - Nothing much happened for a decade
  - Hampered by deployment issues, and a lack of adoption incentives
  - Big push ~2011 as exhaustion looms

# IPv6 Deployment

Percentage of users accessing Google via IPv6

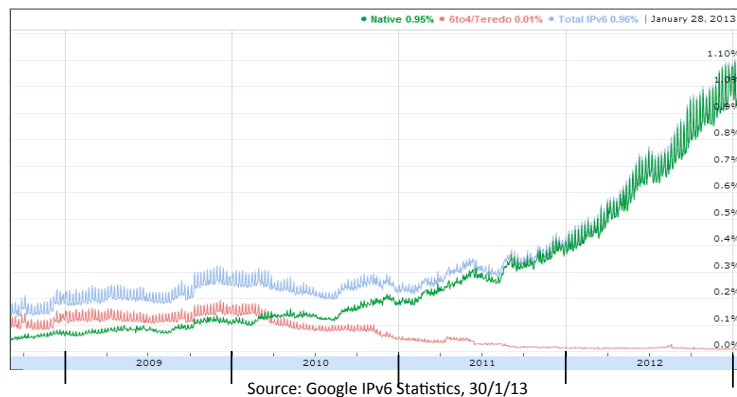


Time for growth!



# IPv6


- Features large addresses
  - 128 bits, most of header
- New notation
  - 8 groups of 4 hex digits (16 bits)
  - Omit leading zeros, groups of zeros

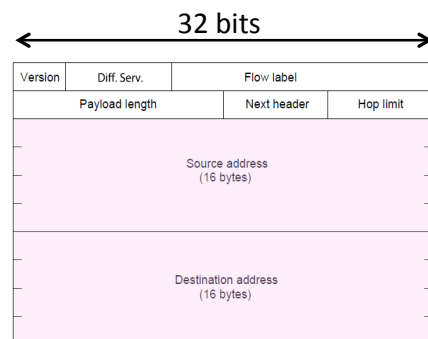



## IPv6 (2)

- Lots of other, smaller changes
  - Streamlined header processing
  - Flow label to group of packets
  - Better fit with “advanced” features (mobility, multicasting, security)

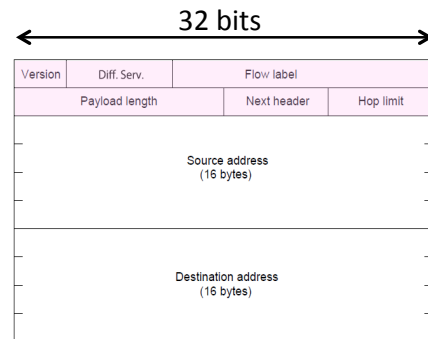


## IPv6 Transition

- The Big Problem:
  - How to deploy IPv6?
  - Fundamentally incompatible with IPv4
- Dozens of approaches proposed
  - Dual stack (speak IPv4 and IPv6)
  - Translators (convert packets)
  - Tunnels (carry IPv6 over IPv4) »

## Tunneling

- Native IPv6 islands connected via IPv4
  - Tunnel carries IPv6 packets across IPv4 network

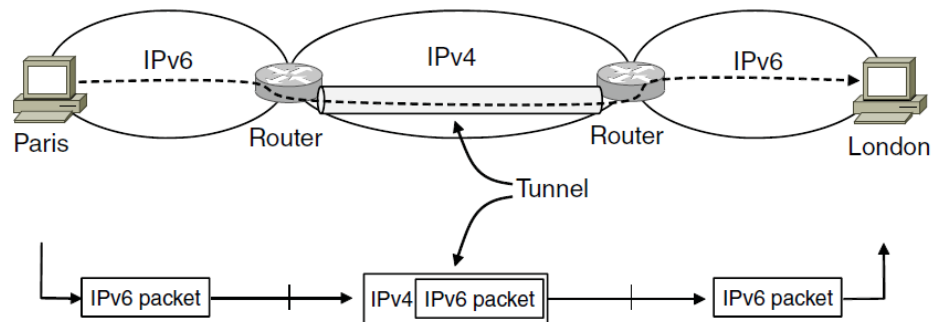


CSE 461 University of Washington

83

## Tunneling (2)

- Tunnel acts as a single link across IPv4 network

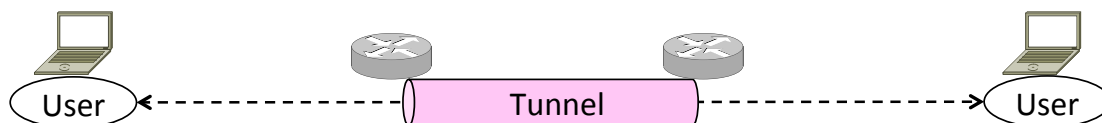


CSE 461 University of Washington

84

## Tunneling (3)

- Tunnel acts as a single link across IPv4 network
  - Difficulty is to set up tunnel endpoints and routing

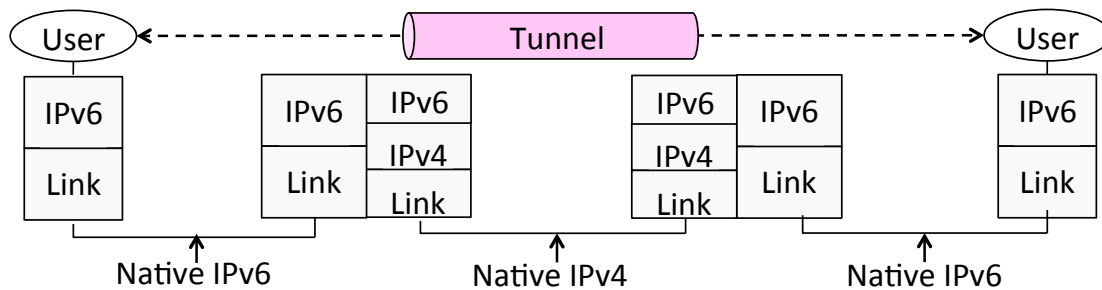

## Introduction to Computer Networks

### Network Address Translation (§5.6.2)




Computer Science & Engineering

UNIVERSITY of WASHINGTON


## Topic

- What is NAT (Network Address Translation)? How does it work?
  - NAT is widely used at the edges of the network, e.g., homes

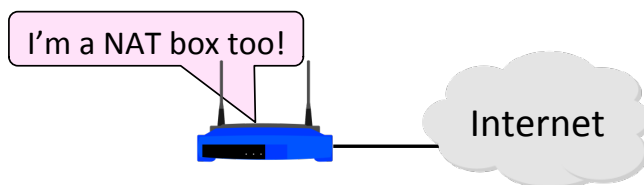

## Middleboxes

- Sit "inside the network" but perform "more than IP" processing on packets to add new functionality
  - NAT box, Firewall / Intrusion Detection System

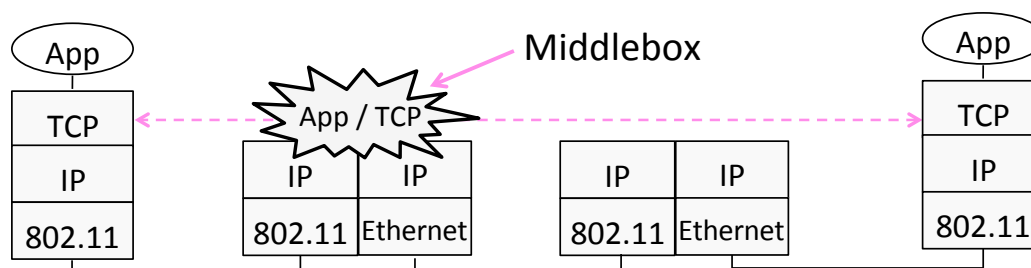

## Middleboxes (2)


- Advantages
  - A possible rapid deployment path when there is no other option
  - Control over many hosts (IT)
- Disadvantages
  - Breaking layering interferes with connectivity; strange side effects
  - Poor vantage point for many tasks

## NAT (Network Address Translation) Box

- NAT box connects an internal network to an external network
  - Many internal hosts are connected using few external addresses
  - Middlebox that “translates addresses”
- Motivated by IP address scarcity
  - Controversial at first, now accepted

## NAT (2)

- Common scenario:
  - Home computers use “private” IP addresses
  - NAT (in AP/firewall) connects home to ISP using a single external IP address

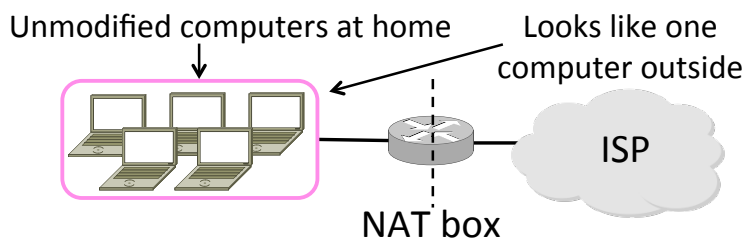

CSE 461 University of Washington

91

## How NAT Works

- Keeps an internal/external table
  - Typically uses IP address + TCP port
  - This is address and port translation

What host thinks	What ISP thinks
Internal IP:port	External IP : port
192.168.1.12 : 5523	44.25.80.3 : 1500
192.168.1.13 : 1234	44.25.80.3 : 1501
192.168.2.20 : 1234	44.25.80.3 : 1502


- Need ports to make mapping 1-1 since there are fewer external IPs

CSE 461 University of Washington

92

## How NAT Works (2)

- Internal → External:
  - Look up and rewrite Source IP/port

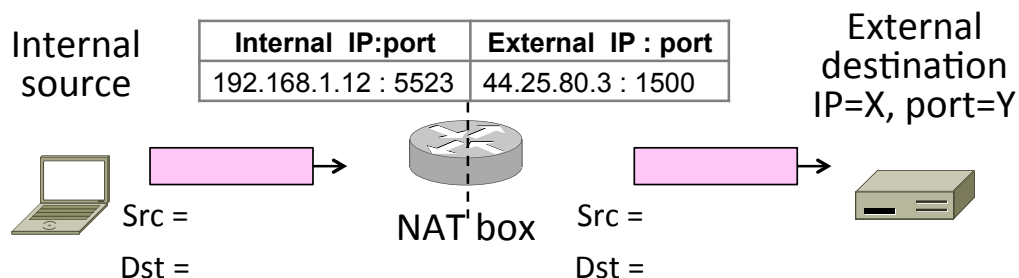


CSE 461 University of Washington

93

## How NAT Works (3)

- External → Internal
  - Look up and rewrite Destination IP/port

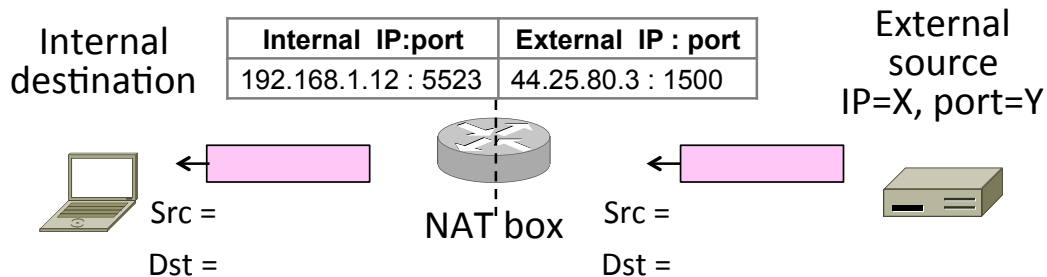


CSE 461 University of Washington

94

## How NAT Works (4)

- Need to enter translations in the table for it to work
  - Create external name when host makes a TCP connection

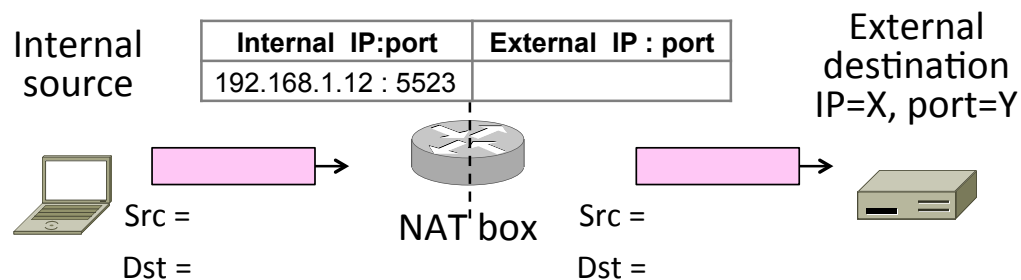

## NAT Downsides

- Connectivity has been broken!
  - Can only send incoming packets after an outgoing connection is set up
  - Difficult to run servers or peer-to-peer apps (Skype) at home
- Doesn't work so well when there are no connections (UDP apps)
- Breaks apps that unwisely expose their IP addresses (FTP)