CSE and EE 461
Lecture 11

Autumn Quarter 1997

Underutilization of Stop-and-Wait

- All stop-and-wait protocols suffer from underutilization if propogation delay is high.

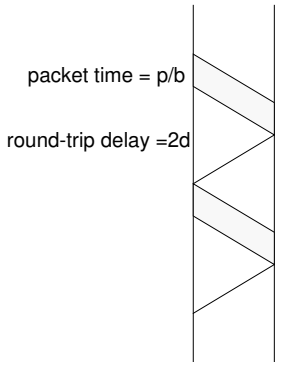

$$U = \frac{\frac{p}{b}}{\frac{p}{b} + 2d} = \frac{1}{1 + \frac{2db}{p}}$$

Utilization can be very small.

Sliding Window Protocols

- Choose N, such that (N-1) p/b $\geq$ 2d where 2d is the approximate round-trip bit delay.
- Window size is N.
- Sender can send upto but not more than N frames at a time



Pipelining

Error Control

- The Sender must store N frames because there are as many as N frames or their acks in transit. Some of the N frames might need to be resent.
- **Go-back-N** resend strategy:

  If a frame is lost then resend that frame and all the frames after it that have been stored.

  At least N + 1 sequence numbers are needed for go-back-N
- **Selective Repeat** strategy:

  If a frame is lost then just resend that frame and no others.

  At least 2N sequence numbers are needed for selective repeat.

Sender's and Receiver's Buffers



- The sender's buffers contain all frames sent but not yet acknowledged

  The sender advances its window when acknowledgements arrive.
- The receiver's buffers are empty awaiting data. A buffer may be full if an earlier buffer is empty.

  The receiver advances its window when frames arrive.
- Ack number k means that the frame with seq number k has arrived or that all frames with sequence numbers at or to the left of k have arrived.

Normal Operation of Sliding Windows

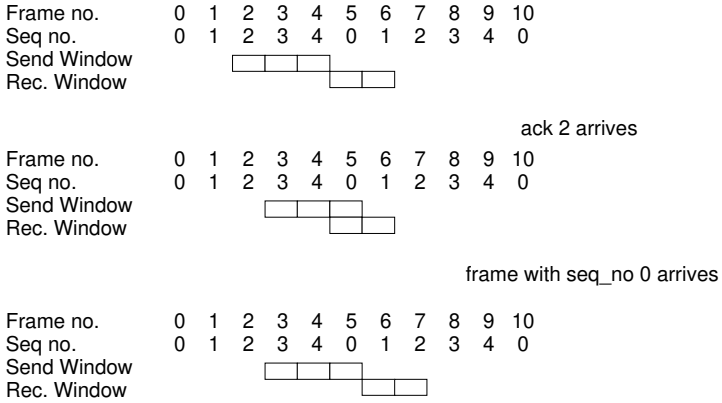

How Many Sequence Numbers

- There are s sequence numbers, {0,1,2,,...s-1}.
- The sender and receiver cycle through them.
- If the sender has x buffers and the receiver y buffers then $s \geq x+y$.

To few sequence numbers

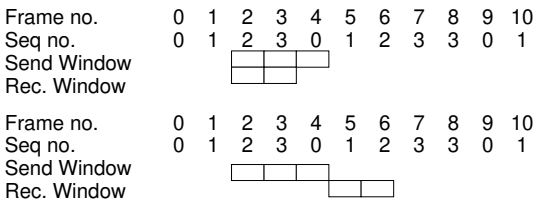

These situations appear identical to the sender!

Example of Go-Back-N

- N = 4

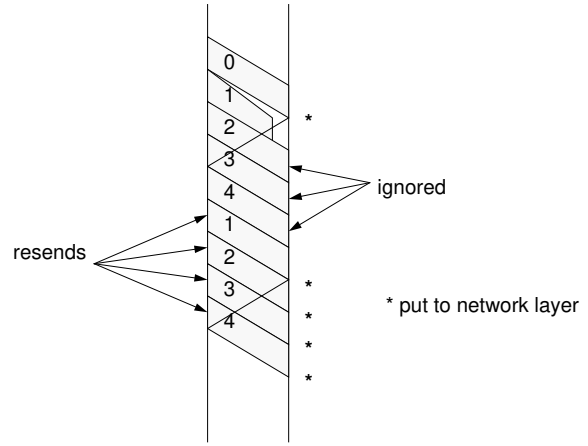

Go-Back-N The Sliding Windows

- The receiver has only one buffer in Go-Back-N. N = 3 in this case.

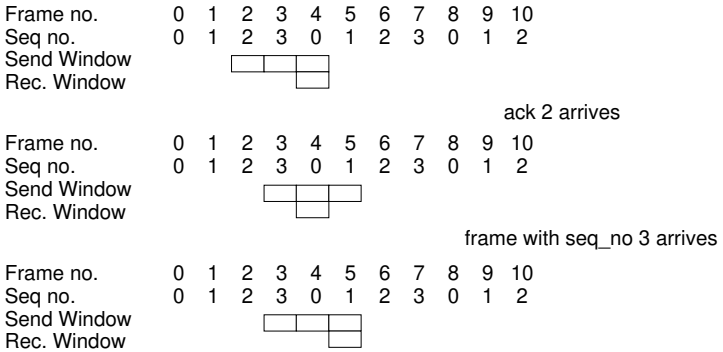

Go-Back-N Policies

The number of sequence numbers = {0,1,2,...s-1}

- Sender's Policy

  - if start of window is at i and the ack (i + j) mod s arrives, then advance window by j + 1, and send new frames in the window.

  - if start of window has a timeout then resend the entire window.

- Receiver's Policy

  - if window is at i and frame i arrives then put data to network layer, advance window by 1 and send ack with i.

  - If window is at i and a frame j arrives where j different from i then ignor the frame, but send ack (i-1) mod s.

We must have $s \geq N + 1$

Advancing the Sender's Window by More than 1

- Ack i acknowledges all frames in the senders window at or to the left of the frame with sequence number i.



Suppose ack 3 is lost but ack 0 arrives, then advance Sender's window by 2