

TriColor **RED** **GREEN** **BLUE** LED

This full color super bright LED contains red green and blue LEDs housed in a single 5mm epoxy package They are available with water clear or milky white diffused lenses as part numbers RL5-RGB-C and RL5-RGB-D Available with common CATHODE or ANODE


[CLICK HERE TO BUY ONLINE NOW](#)

We also offer an automatic color changing RGB LED.

[CLICK HERE TO SEE SPECS](#)


optoelectric characteristics: SUPER RED (AlGalpn)

PARAMETER	SYMBOL	MAX	TYP	UNIT	TEST
View Angle of Half Power	2ø1/2		15	Degree	
Forward Voltage	VF	2.6	2.0	V	IF=20mA
Peak Emission Wavelength	ÿ P		630	nm	
Luminous Intensity	IV		1200	mcd	IF=20mA

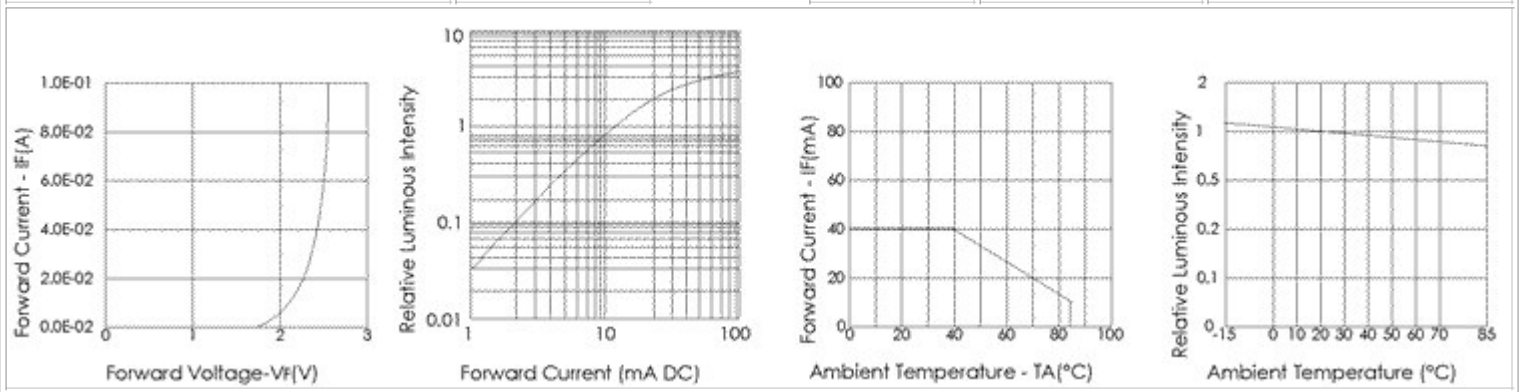


optoelectric characteristics: SUPER GREEN (GaInN/GaN)

PARAMETER	SYMBOL	MAX	TYP	UNIT	TEST
View Angle of Half Power	2ø1/2		15	Degree	
Forward Voltage	VF	4.0	3.5	V	IF=20mA
Peak Emission Wavelength	ÿ P		525	nm	
Luminous Intensity	IV		3700	mcd	IF=20mA

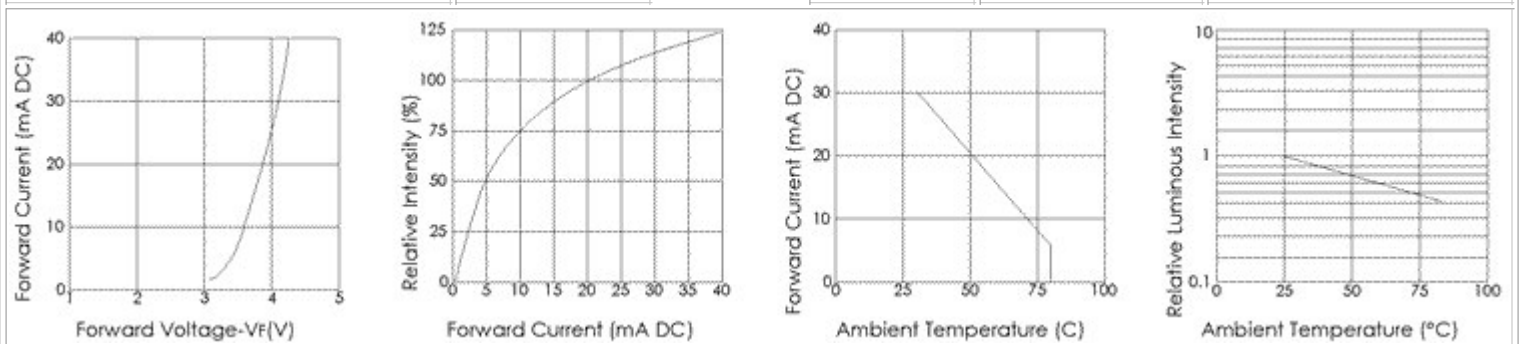

optoelectric characteristics: SUPER BLUE (GaN)

PARAMETER	SYMBOL	MAX	TYP	UNIT	TEST
View Angle of Half Power	2 ϕ 1/2		15	Degree	
Forward Voltage	V _F	4.0	3.5	V	I _F =20mA
Peak Emission Wavelength	λ P		472	nm	
Luminous Intensity	I _V		700	mcd	I _F =20mA

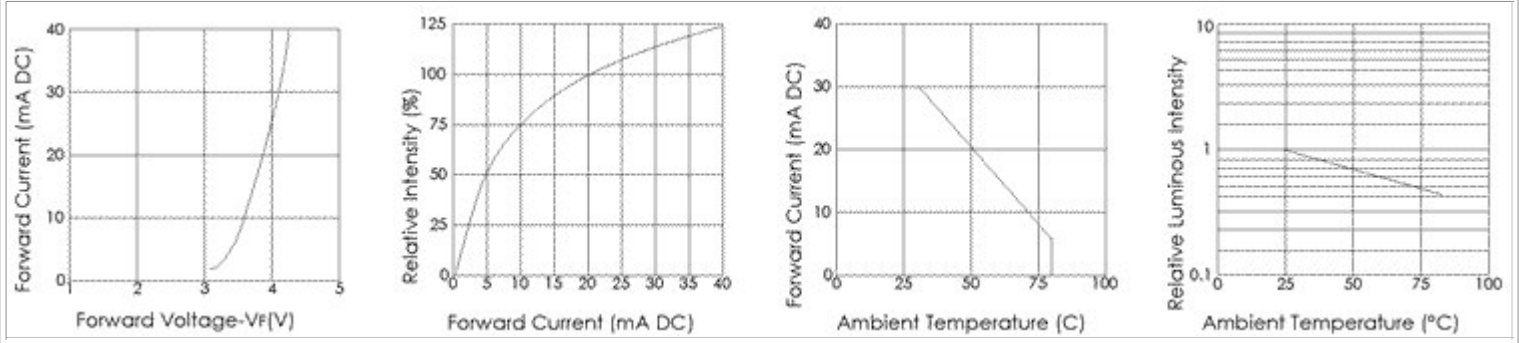



AVAILABLE WITH COMMON CATHODE OR COMMON ANODE


absolute maximum ratings: (T_A=25°C, per individual LED) **PART NUMBERS RL5-RGB-C and RL5-RGB-D**

PARAMETER	SYMBOL	RATING	UNIT
Power Dissipation	PD	100	mW
Continuous Forward Current	I _F	20	mA
Peak Forward Current	I _{FM}	50	mA
Reverse Voltage	V _R	5.0	V
Operating Temperature	T _A	-40~+85	°C
Storage Temperature	T _{STG}	-40~+85	°C
Reverse Current (V _R =5V)	I _R	10	μa

Lead Soldering Temperature (3mm from body) 260C (for 3 seconds)

CLICK HERE FOR PRICING AND TO BUY ONLINE NOW

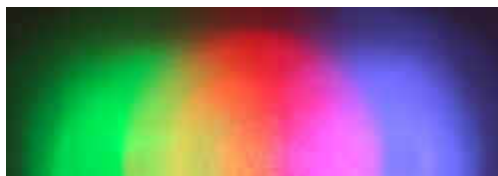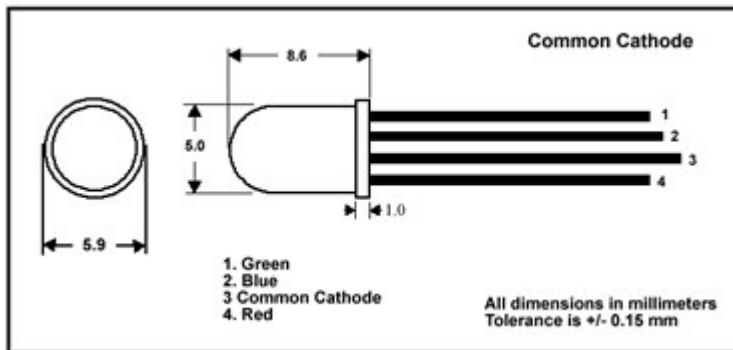

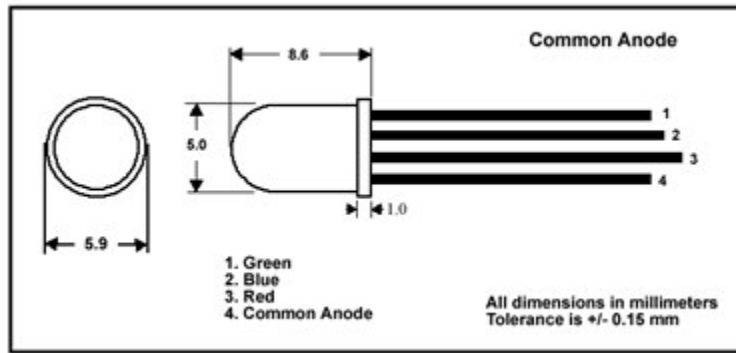

LEADS ARE 0.48mm x 0.48mm square - LEAD SPACING IS 1.25mm - LEAD LENGTH IS 24mm to 28mm