


Asynchronous Signalling

RS-232


Receiver & Sender clocks are approximately the same.

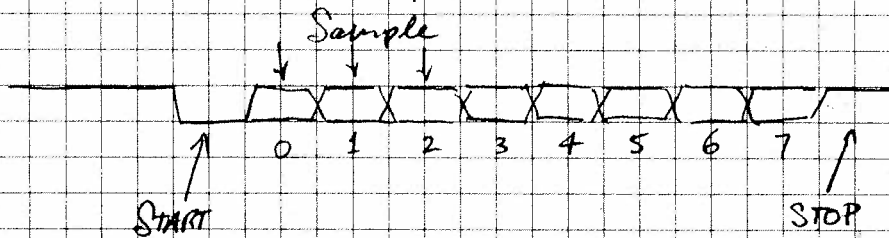

STOP/START transition allows realignment.

RS-232 is a character protocol.

I²C Serial Bus

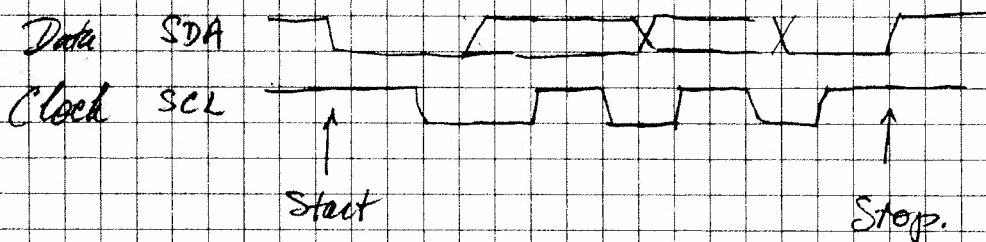

Signals are open-drain (Wired-OR)

Uses high-level protocol:

Multiple Masters & Slaves