

# **Hierarchical Modeling**

**Brian Curless  
CSE 557  
Fall 2013**

## Reading

Required:

- ◆ Angel, sections 8.1 – 8.6, 8.8 (online handout)

Optional:


- ◆ *OpenGL Programming Guide*, chapter 3

## Symbols and instances

Most graphics APIs support a few geometric **primitives**:

- ◆ spheres
- ◆ cubes
- ◆ cylinders

These symbols are **instanced** using an **instance transformation**.

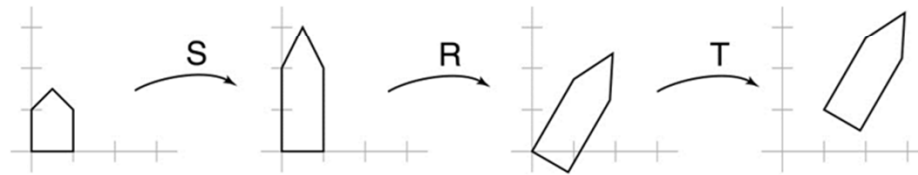


**Q:** What is the matrix for the instance transformation above?

$$M = \cancel{SRT} \\ TRS$$

## 3D Example: A robot arm

Consider this robot arm with 3 degrees of freedom:

- ◆ Base rotates about its vertical axis by  $\theta$
- ◆ Upper arm rotates in its  $xy$ -plane by  $\phi$
- ◆ Lower arm rotates in its  $xy$ -plane by  $\psi$

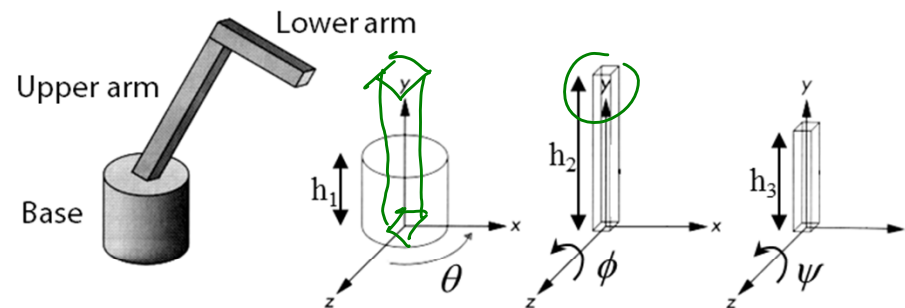

[Angel, 2011]

(Note that the angles are set to zero in the figure; i.e., the parts are shown in their “default” positions.)

**Q:** What matrix do we use to transform the base?


**Q:** What matrix for the upper arm?

**Q:** What matrix for the lower arm?


$$\underbrace{R_y(\theta)}_{\text{base}} \underbrace{T(0, h_1, 0)}_{\text{upper arm}} \underbrace{R_z(\phi) T(0, h_2, 0) R_z(\psi)}_{\text{lower arm}}$$

## 3D Example: A robot arm


An alternative interpretation is that we are taking the original coordinate frames...

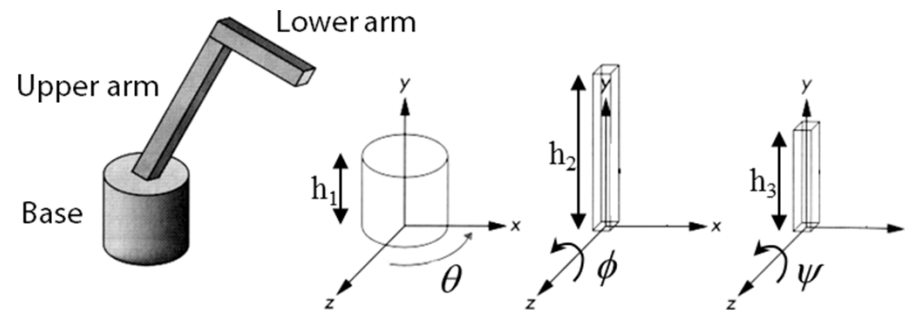

...and translating and rotating them into place:

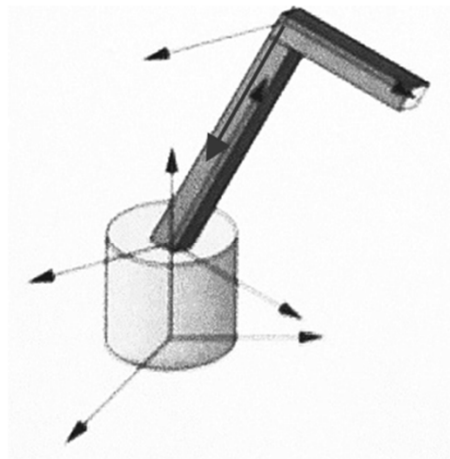

# From parts to model to viewer

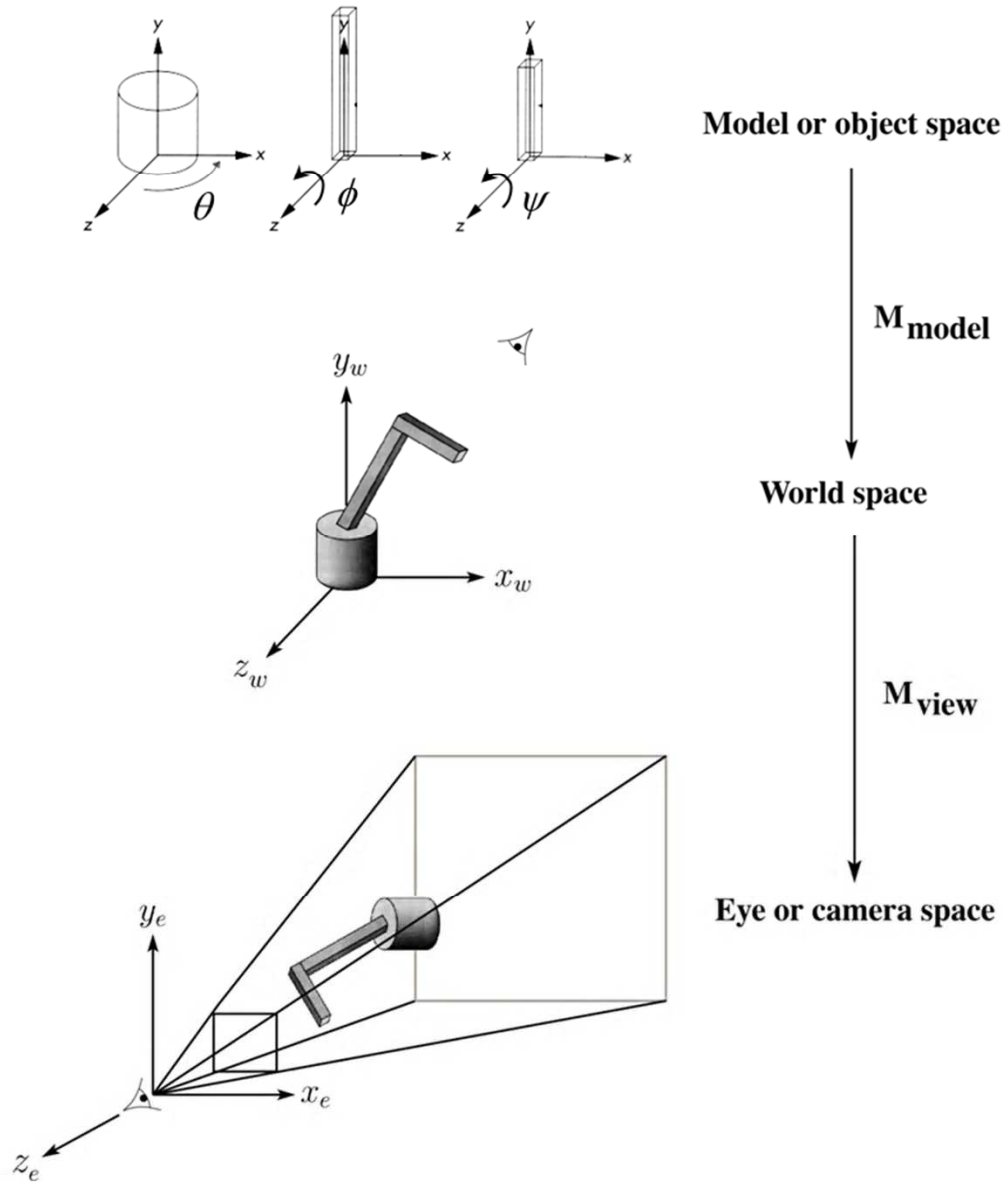

## Robot arm implementation

The robot arm can be displayed by keeping a global matrix and computing it at each step:

```
Matrix M_model;
Matrix M_view;

main()
{
    . . .
    M_view = compute_view_transform();
    robot_arm();
    . . .
}

robot_arm()
{
    M_model = M_view*R_y(theta);
    base();
    M_model = M_View*R_y(theta)*T(0,h1,0)*R_z(phi);
    upper_arm();
    M_model = M_view*R_y(theta)*T(0,h1,0)
                *R_z(phi)*T(0,h2,0)*R_z(psi);
    lower_arm();
}
```

Do the matrix computations seem wasteful?

## Robot arm implementation, better

Instead of recalculating the global matrix each time, we can just update it *in place* by concatenating matrices on the right:

```
Matrix M_modelview;

main()
{
    . . . .
    M_modelview = compute_view_transform();
    robot_arm();
    . . . .
}

robot_arm()
{
    M_model *= R_y(theta);
    base();
    M_model *= T(0, h1, 0) * R_z(phi);
    upper_arm();
    M_model *= T(0, h2, 0) * R_z(psi);
    lower_arm();
}
```



## Robot arm implementation, OpenGL


OpenGL maintains a global state matrix called the **model-view matrix**, which is updated by concatenating matrices on the *right*.

```
main()
{
    . . .
    glMatrixMode( GL_MODELVIEW );
    Matrix M = compute_view_xform();
    glLoadMatrixf( M );
    robot_arm();
    . . .
}

robot_arm()
{
    glRotatef( theta, 0.0, 1.0, 0.0 );
    base();
    glTranslatef( 0.0, h1, 0.0 );
    glRotatef( phi, 0.0, 0.0, 1.0 );
    lower_arm();
    glTranslatef( 0.0, h2, 0.0 );
    glRotatef( psi, 0.0, 0.0, 1.0 );
    upper_arm();
}
```


# Hierarchical modeling

Hierarchical models can be composed of instances using trees or DAGs:

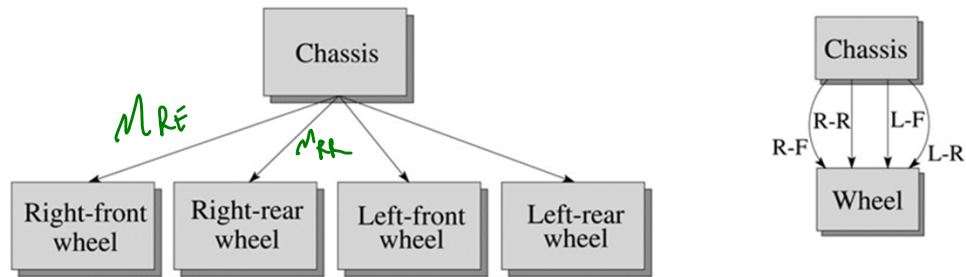


- ◆ edges contain geometric transformations
- ◆ nodes contain geometry (and possibly drawing attributes)

How might we draw the tree for the robot arm?

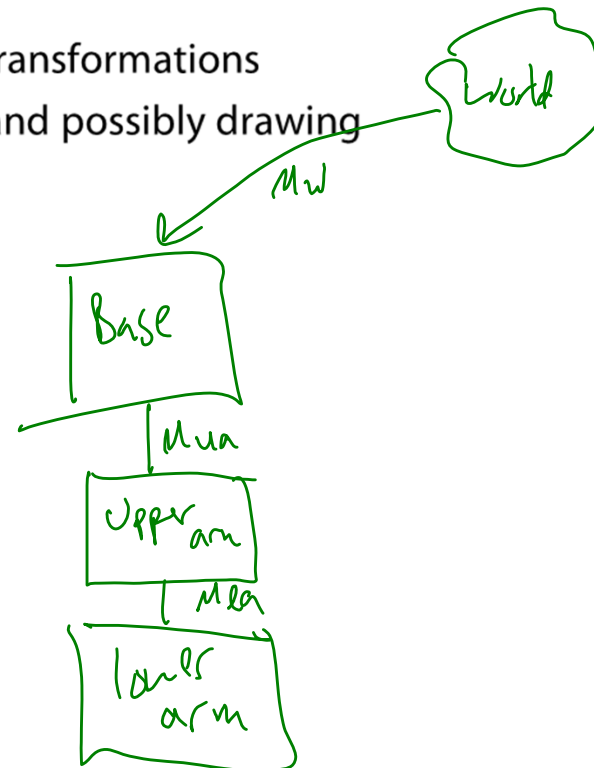

## A complex example: human figure

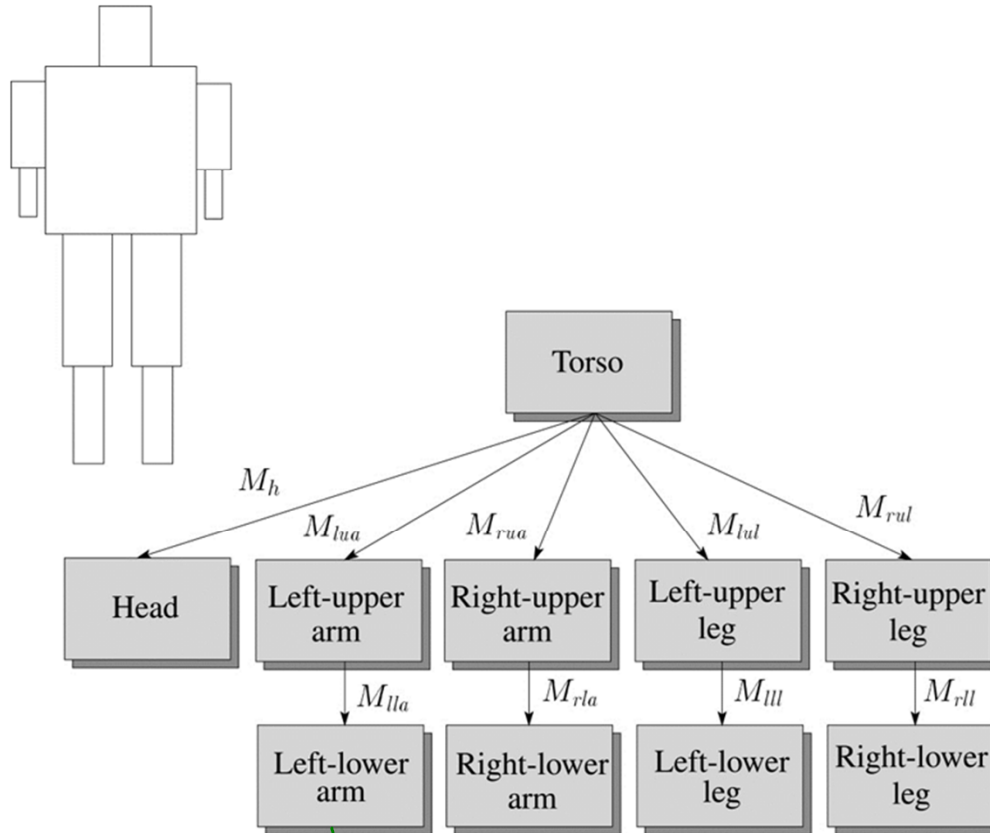

Q: What's the most sensible way to traverse this tree?

depth first

# Human figure implementation, OpenGL

```
figure()
{
    torso();
    glPushMatrix();
        glTranslate( ... );
        glRotate( ... );
        head();
    glPopMatrix();
    glPushMatrix();
        glTranslate( ... );
        glRotate( ... );
        left_upper_arm();
        glPushMatrix();
            glTranslate( ... );
            glRotate( ... );
            left_lower_arm();
        glPopMatrix();
    glPopMatrix();
    . . .
}
```

# Animation

The above examples are called **articulated models**:

- ◆ rigid parts
- ◆ connected by joints

They can be animated by specifying the joint angles (or other display parameters) as functions of time.

## Key-frame animation

The most common method for character animation in production is **key-frame animation**.

- ◆ Each joint specified at various **key frames** (not necessarily the same as other joints)
- ◆ System does interpolation or **in-betweening**

Doing this well requires:

- ◆ A way of smoothly interpolating key frames: **splines**
- ◆ A good interactive system
- ◆ A lot of skill on the part of the animator

