



CSE-571 Probabilistic Robotics

Mapping



Types of SLAM-Problems

- Grid maps or scans



[Lu & Milios, 97; Gutmann, 98; Thrun 98; Burgard, 99; Konolige & Gutmann, 00; Thrun, 00; Arras, 99; Haehnel, 01;...]

- Landmark-based



[Leonard et al., 98; Castelanos et al., 99; Dissanayake et al., 2001; Montemerlo et al., 2002;...]

Problems in Mapping

- **Sensor interpretation**
 - How do we **extract relevant information** from raw sensor data?
 - How do we represent and **integrate** this information **over time**?
- **Robot locations have to be known**
 - How can we estimate them **during mapping**?

Occupancy Grid Maps

- Introduced by Moravec and Elfes in 1985
- Represent environment by a grid.
- Estimate the probability that a location is occupied by an obstacle.
- **Key assumptions**
 - Occupancy of individual cells is independent

$$\begin{aligned} Bel(m_t) &= P(m_t | u_1, z_2, K, u_{t-1}, z_t) \\ &= \prod_{x,y} Bel(m_t^{[xy]}) \end{aligned}$$

- Robot positions are known!

Updating Occupancy Grid Maps

- **Idea:** Update each individual cell using a **binary Bayes filter**.


$$Bel(m_t^{[xy]}) = \eta p(z_t | m_t^{[xy]}) \int p(m_t^{[xy]} | m_{t-1}^{[xy]}, u_{t-1}) Bel(m_{t-1}^{[xy]}) dm_{t-1}^{[xy]}$$

- **Additional assumption:** Map is static.

$$Bel(m_t^{[xy]}) = \eta p(z_t | m_t^{[xy]}) Bel(m_{t-1}^{[xy]})$$

Typical Sensor Model for Occupancy Grid Maps

Combination of a linear function and a Gaussian:

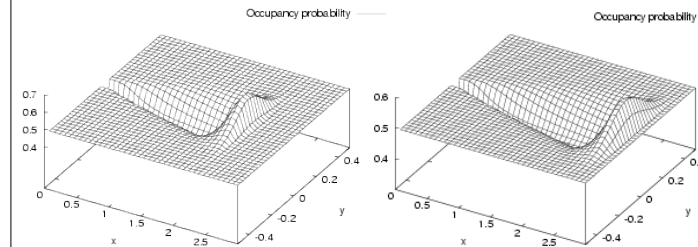

Updating Occupancy Grid Maps

- Updated using **inverse sensor model** and **odds ratio**

$$Bel(m_t^{[xy]}) = 1 - \left(1 + \frac{P(m_t^{[xy]} | z_t, x_t)}{1 - P(m_t^{[xy]} | z_t, x_t)} \cdot \frac{1 - P(m_{t-1}^{[xy]})}{P(m_{t-1}^{[xy]})} \cdot \frac{Bel(m_{t-1}^{[xy]})}{1 - Bel(m_{t-1}^{[xy]})} \right)$$

- or **log-odds ratio**

$$\bar{B}(m_t^{[xy]}) = \log odds(m_t^{[xy]} | z_t, x_t) - \log odds(m_{t-1}^{[xy]}) + \bar{B}(m_{t-1}^{[xy]})$$


Alternative: Simple Counting

- For every cell count
 - **hits(x,y):** number of cases where a beam ended at <x,y>
 - **misses(x,y):** number of cases where a beam passed through <x,y>


$$Bel(m^{[xy]}) = \frac{\text{hits}(x, y)}{\text{hits}(x, y) + \text{misses}(x, y)}$$

- **Assumption:** $P(\text{occupied}(x, y)) = P(\text{reflects}(x, y))$


Incremental Updating of Occupancy Grids (Example)

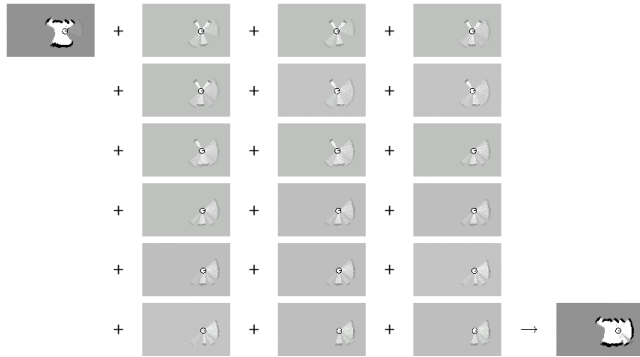


Resulting Map Obtained with Ultrasound Sensors

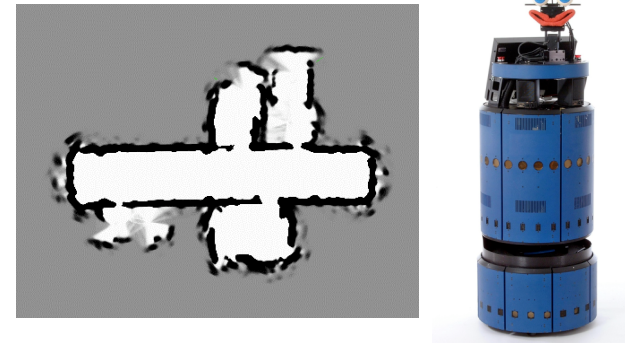

Occupancy Grids: From scans to maps

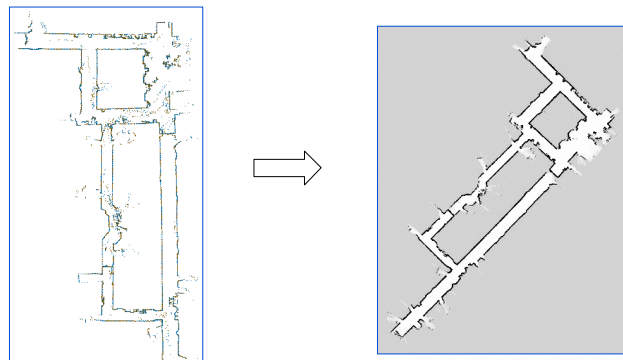

Tech Museum, San Jose

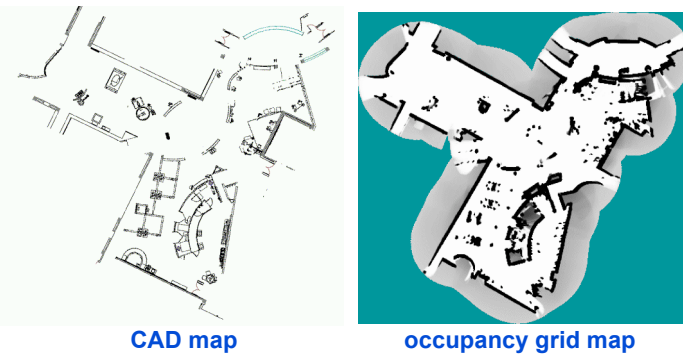

CAD map

occupancy grid map