

# CSE-571

# Probabilistic Robotics

## **Kalman Filters**

Dieter Fox

# Bayes Filter Reminder

- Prediction

$$\overline{bel}(x_t) = \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1}$$

- Correction


$$bel(x_t) = \eta p(z_t | x_t) \overline{bel}(x_t)$$

# Gaussians

$p(x) \sim N(\mu, \sigma^2)$ :

$$p(x) = \frac{1}{\sqrt{2\pi}\sigma} e^{-\frac{1}{2}\frac{(x-\mu)^2}{\sigma^2}}$$


Univariate

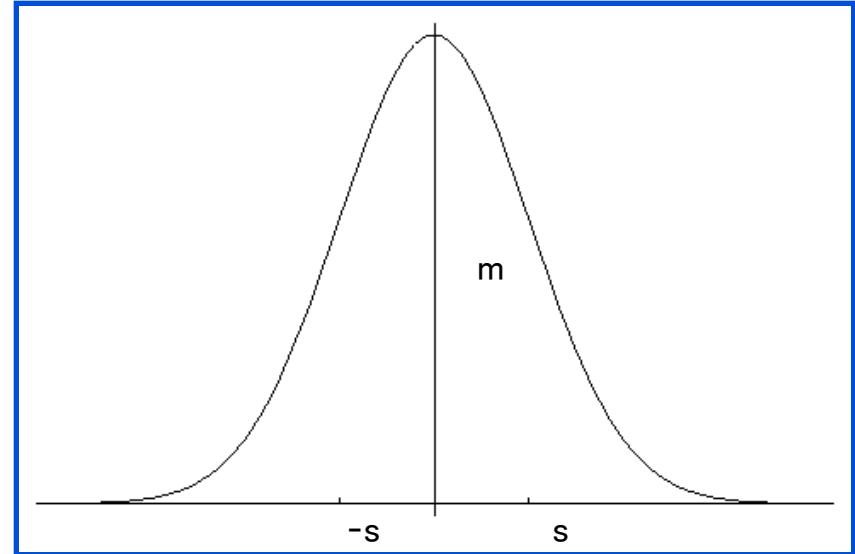

$p(\mathbf{x}) \sim N(\boldsymbol{\mu}, \boldsymbol{\Sigma})$ :

$$p(\mathbf{x}) = \frac{1}{(2\pi)^{d/2} |\boldsymbol{\Sigma}|^{1/2}} e^{-\frac{1}{2} (\mathbf{x}-\boldsymbol{\mu})^t \boldsymbol{\Sigma}^{-1} (\mathbf{x}-\boldsymbol{\mu})}$$

Multivariate

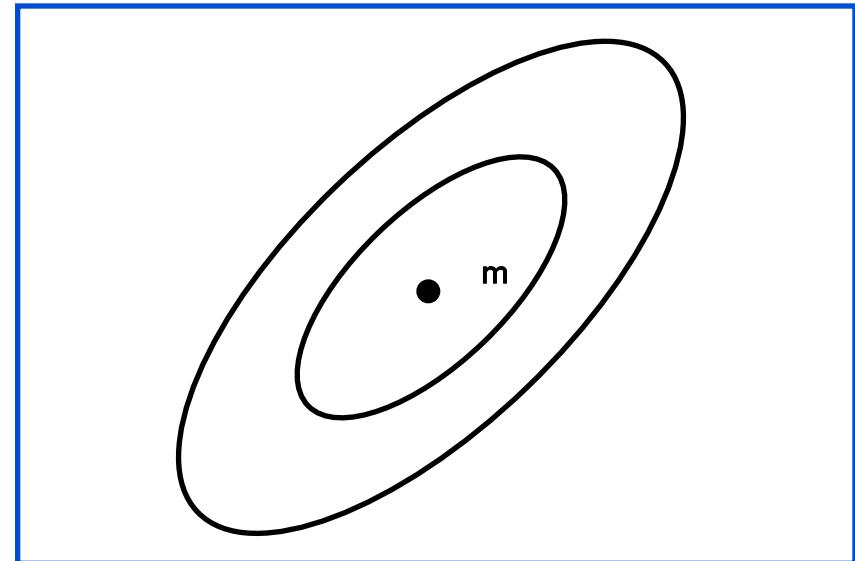

# Properties of Gaussians

$$\left. \begin{array}{l} X \sim N(\mu, \sigma^2) \\ Y = aX + b \end{array} \right\} \Rightarrow Y \sim N(a\mu + b, a^2\sigma^2)$$

$$\left. \begin{array}{l} X_1 \sim N(\mu_1, \sigma_1^2) \\ X_2 \sim N(\mu_2, \sigma_2^2) \end{array} \right\} \Rightarrow p(X_1) \cdot p(X_2) \sim N\left( \frac{\sigma_2^2}{\sigma_1^2 + \sigma_2^2} \mu_1 + \frac{\sigma_1^2}{\sigma_1^2 + \sigma_2^2} \mu_2, \frac{1}{\sigma_1^{-2} + \sigma_2^{-2}} \right)$$

# Multivariate Gaussians

$$\left. \begin{array}{l} X \sim N(\mu, \Sigma) \\ Y = AX + B \end{array} \right\} \Rightarrow Y \sim N(A\mu + B, A\Sigma A^T)$$

$$\left. \begin{array}{l} X_1 \sim N(\mu_1, \Sigma_1) \\ X_2 \sim N(\mu_2, \Sigma_2) \end{array} \right\} \Rightarrow p(X_1) \cdot p(X_2) \sim N\left( \frac{\Sigma_2}{\Sigma_1 + \Sigma_2} \mu_1 + \frac{\Sigma_1}{\Sigma_1 + \Sigma_2} \mu_2, \frac{1}{\Sigma_1^{-1} + \Sigma_2^{-1}} \right)$$

- We stay in the “Gaussian world” as long as we start with Gaussians and perform only linear transformations.

# Discrete Kalman Filter

Estimates the state  $x$  of a discrete-time controlled process that is governed by the linear stochastic difference equation

$$x_t = A_t x_{t-1} + B_t u_t + \varepsilon_t$$

with a measurement

$$z_t = C_t x_t + \delta_t$$

# Components of a Kalman Filter

$A_t$

Matrix ( $n \times n$ ) that describes how the state evolves from  $t-1$  to  $t$  without controls or noise.

$B_t$

Matrix ( $n \times l$ ) that describes how the control  $u_t$  changes the state from  $t$  to  $t-1$ .

$C_t$




Matrix ( $k \times n$ ) that describes how to map the state  $x_t$  to an observation  $z_t$ .

$\varepsilon_t$

Random variables representing the process and measurement noise that are assumed to be independent and normally distributed with covariance  $R_t$  and  $Q_t$  respectively.

$\delta_t$


# Kalman Filter Updates in 1D

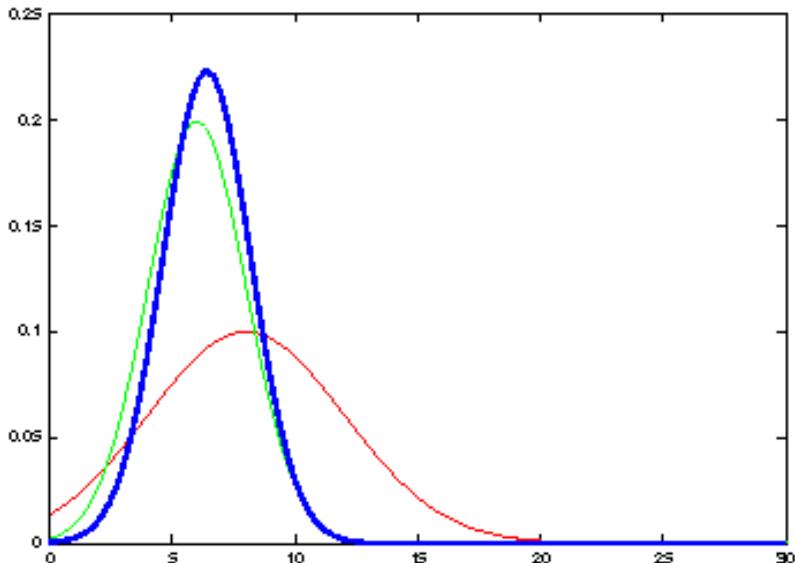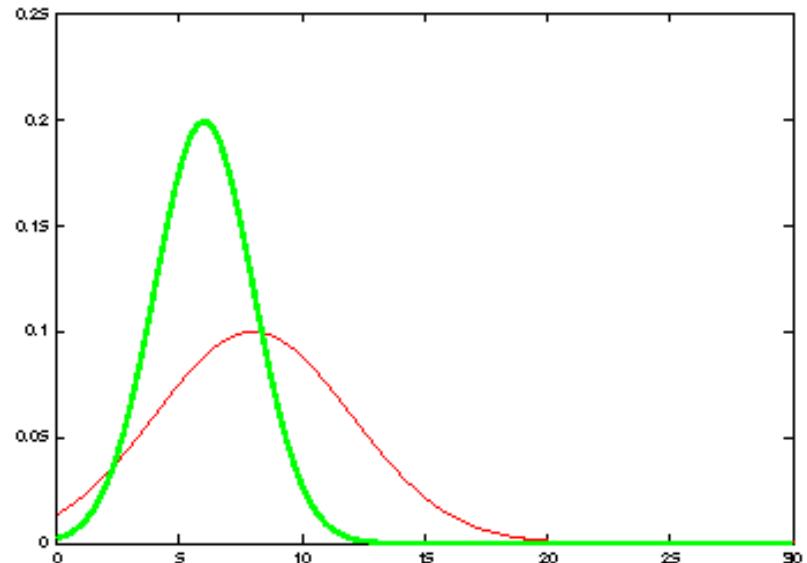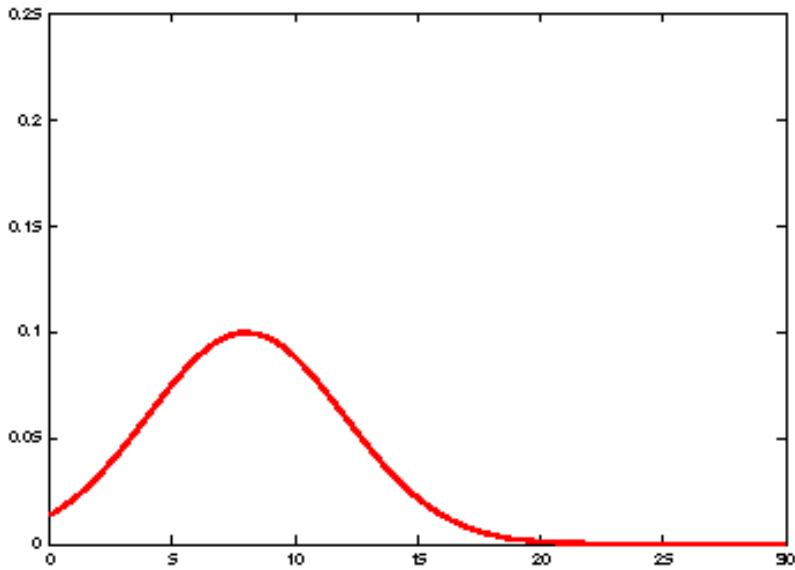

# Kalman Filter Updates in 1D

$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - \bar{\mu}_t) \\ \sigma_t^2 = (1 - K_t)\bar{\sigma}_t^2 \end{cases} \quad \text{with} \quad K_t = \frac{\bar{\sigma}_t^2}{\bar{\sigma}_t^2 + \sigma_{obs,t}^2}$$



$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - C_t \bar{\mu}_t) \\ \Sigma_t = (I - K_t C_t) \bar{\Sigma}_t \end{cases} \quad \text{with} \quad K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}$$

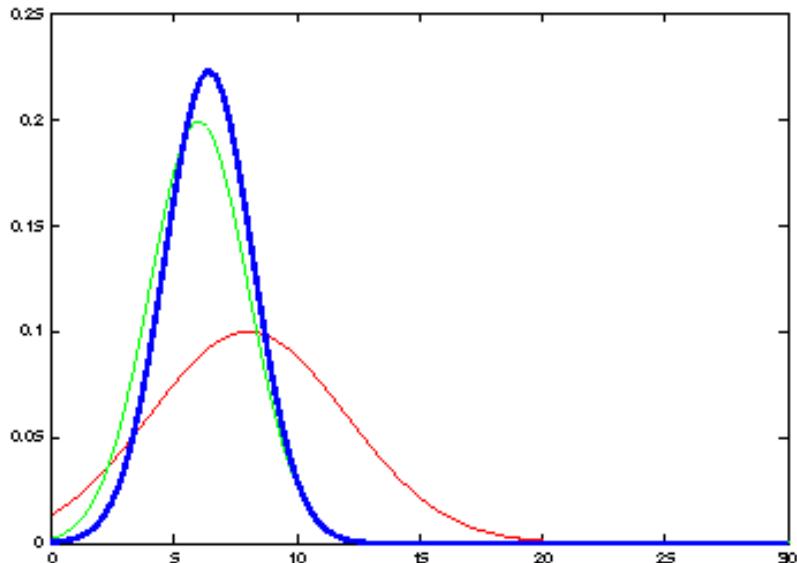





# Kalman Filter Updates in 1D

$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = a_t \mu_{t-1} + b_t u_t \\ \bar{\sigma}_t^2 = a_t^2 \sigma_t^2 + \sigma_{act,t}^2 \end{cases}$$

$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t \\ \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t \end{cases}$$

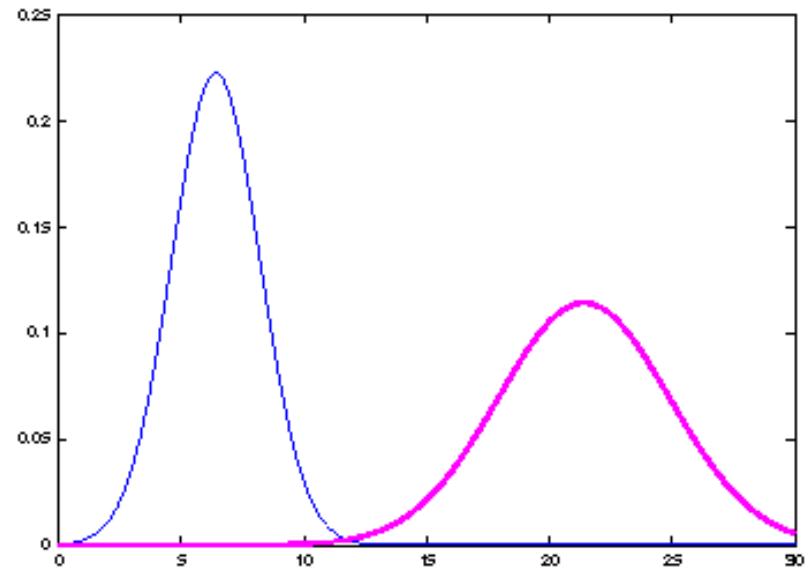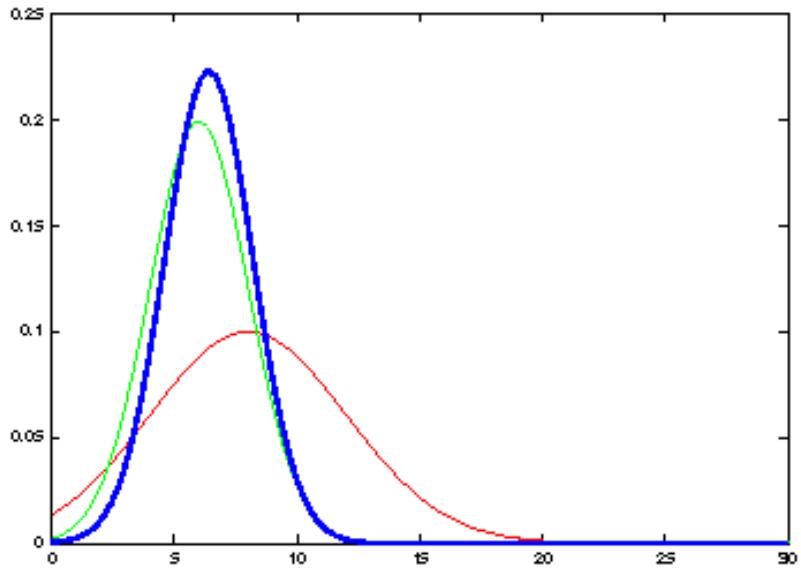

# Kalman Filter Updates

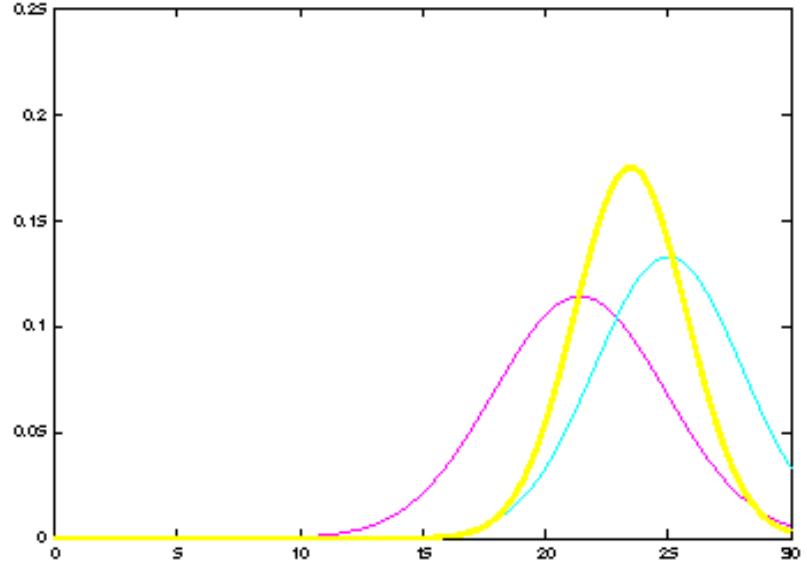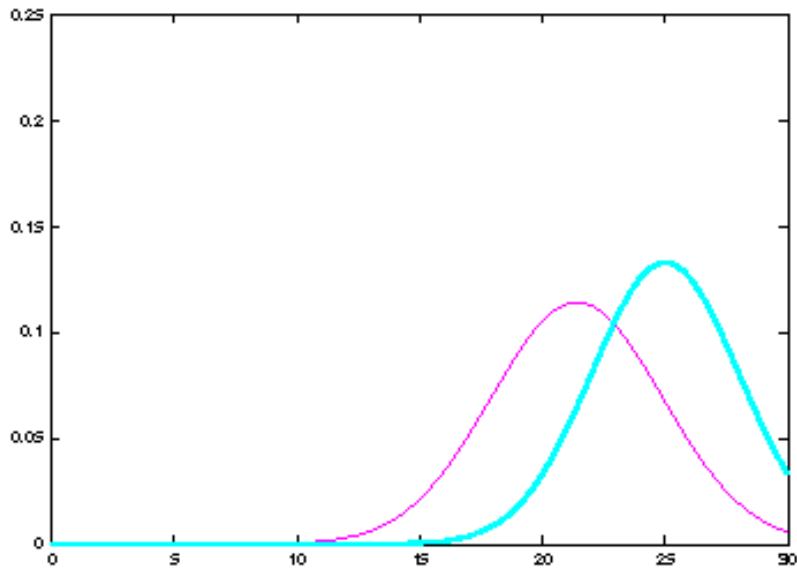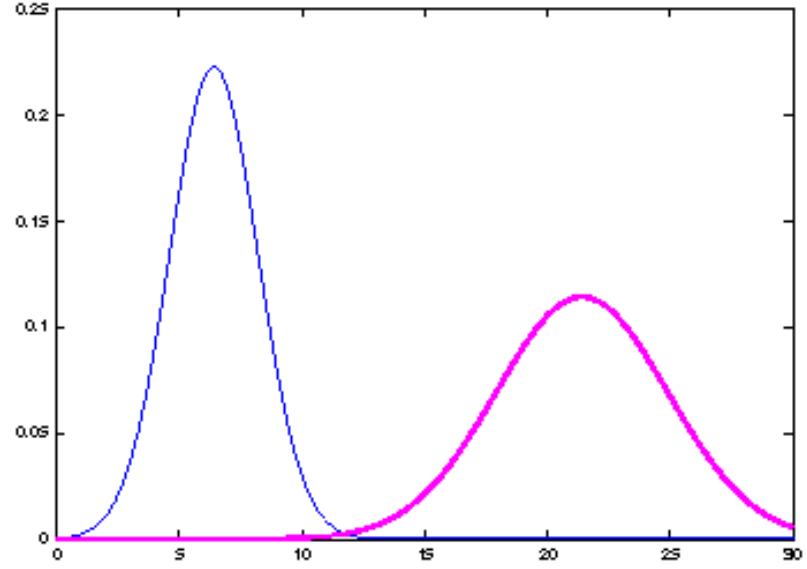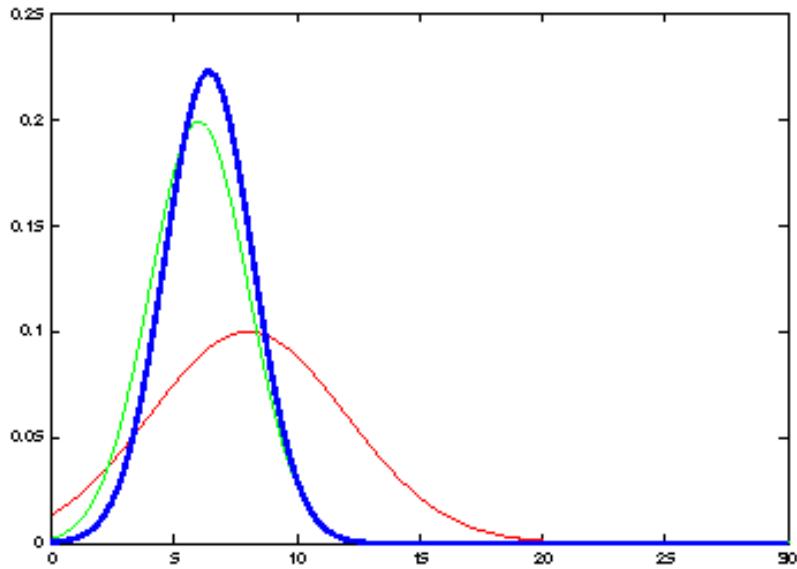

# Linear Gaussian Systems: Initialization

- Initial belief is normally distributed:

$$bel(x_0) = N(x_0; \mu_0, \Sigma_0)$$

# Linear Gaussian Systems: Dynamics

- Dynamics are linear function of state and control plus additive noise:

$$x_t = A_t x_{t-1} + B_t u_t + \epsilon_t$$

$$p(x_t | u_t, x_{t-1}) = N(x_t; A_t x_{t-1} + B_t u_t, R_t)$$

$$\overline{bel}(x_t) = \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1}$$



$$\sim N(x_t; A_t x_{t-1} + B_t u_t, R_t) \quad \sim N(x_{t-1}; \mu_{t-1}, \Sigma_{t-1})$$

# Linear Gaussian Systems: Dynamics

$$\begin{aligned}\overline{bel}(x_t) &= \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1} \\ &\quad \Downarrow \qquad \qquad \qquad \Downarrow \\ &\sim N(x_t; A_t x_{t-1} + B_t u_t, R_t) \quad \sim N(x_{t-1}; \mu_{t-1}, \Sigma_{t-1}) \\ &\quad \Downarrow \\ \overline{bel}(x_t) &= \eta \int \exp \left\{ -\frac{1}{2} (x_t - A_t x_{t-1} - B_t u_t)^T R_t^{-1} (x_t - A_t x_{t-1} - B_t u_t) \right\} \\ &\quad \exp \left\{ -\frac{1}{2} (x_{t-1} - \mu_{t-1})^T \Sigma_{t-1}^{-1} (x_{t-1} - \mu_{t-1}) \right\} dx_{t-1} \\ \overline{bel}(x_t) &= \begin{cases} \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t \\ \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t \end{cases}\end{aligned}$$

# Linear Gaussian Systems: Observations

- Observations are linear function of state plus additive noise:

$$z_t = C_t x_t + \delta_t$$

$$p(z_t | x_t) = N(z_t; C_t x_t, Q_t)$$

$$bel(x_t) = \eta p(z_t | x_t)$$



$$\sim N(z_t; C_t x_t, Q_t)$$

$$\overline{bel}(x_t)$$



$$\sim N(x_t; \bar{\mu}_t, \bar{\Sigma}_t)$$

# Linear Gaussian Systems: Observations

$$bel(x_t) = \eta p(z_t | x_t)$$

$$\Downarrow$$

$$\sim N(z_t; C_t x_t, Q_t)$$

$$\overline{bel}(x_t)$$

$$\Downarrow$$

$$\sim N(x_t; \bar{\mu}_t, \bar{\Sigma}_t)$$

$$\Downarrow$$

$$bel(x_t) = \eta \exp\left\{-\frac{1}{2}(z_t - C_t x_t)^T Q_t^{-1} (z_t - C_t x_t)\right\} \exp\left\{-\frac{1}{2}(x_t - \bar{\mu}_t)^T \bar{\Sigma}_t^{-1} (x_t - \bar{\mu}_t)\right\}$$

$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t (z_t - C_t \bar{\mu}_t) \\ \Sigma_t = (I - K_t C_t) \bar{\Sigma}_t \end{cases}$$

$$\text{with } K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}$$

# Kalman Filter Algorithm

1. Algorithm **Kalman\_filter**( $\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$ ):

2. Prediction:

$$3. \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t$$

$$4. \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t$$

5. Correction:

$$6. K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}$$


$$7. \mu_t = \bar{\mu}_t + K_t (z_t - C_t \bar{\mu}_t)$$

$$8. \Sigma_t = (I - K_t C_t) \bar{\Sigma}_t$$

9. Return  $\mu_t, \Sigma_t$


# The Prediction-Correction-Cycle

Prediction

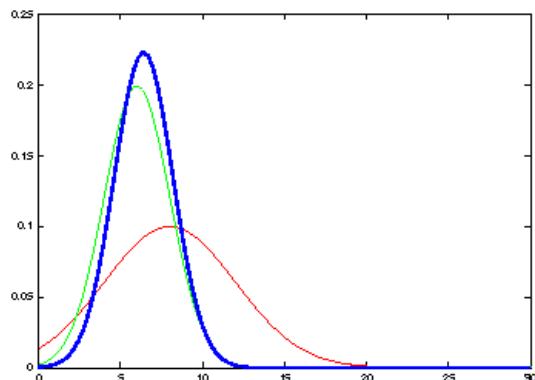


$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = a_t \mu_{t-1} + b_t u_t \\ \bar{\sigma}_t^2 = a_t^2 \sigma_t^2 + \sigma_{act,t}^2 \end{cases}$$

$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t \\ \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t \end{cases}$$

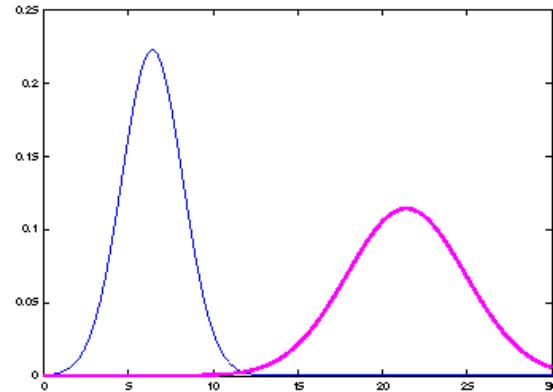


# The Prediction-Correction-Cycle

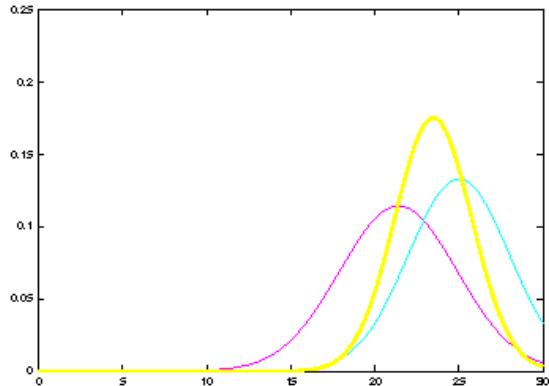

$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - \bar{\mu}_t) \\ \sigma_t^2 = (1 - K_t)\bar{\sigma}_t^2 \end{cases}, K_t = \frac{\bar{\sigma}_t^2}{\bar{\sigma}_t^2 + \sigma_{obs,t}^2}$$

$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - C_t \bar{\mu}_t) \\ \Sigma_t = (I - K_t C_t) \bar{\Sigma}_t \end{cases}, K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}$$

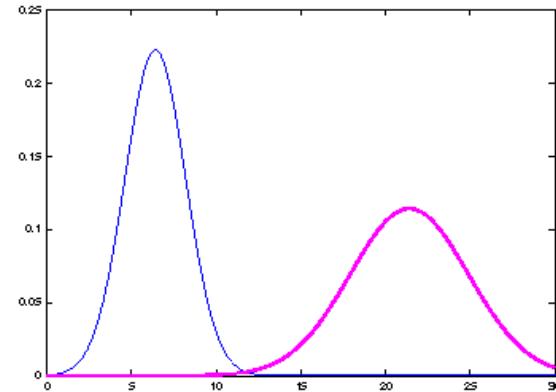

Correction

# The Prediction-Correction-Cycle

Prediction

$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - \bar{\mu}_t) \\ \sigma_t^2 = (1 - K_t)\bar{\sigma}_t^2 \end{cases}, K_t = \frac{\bar{\sigma}_t^2}{\bar{\sigma}_t^2 + \sigma_{obs,t}^2}$$

$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = a_t \mu_{t-1} + b_t u_t \\ \bar{\sigma}_t^2 = a_t^2 \sigma_t^2 + \sigma_{act,t}^2 \end{cases}$$

$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - C_t \bar{\mu}_t) \\ \Sigma_t = (I - K_t C_t) \bar{\Sigma}_t \end{cases}, K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}$$

$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t \\ \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t \end{cases}$$

Correction

# Kalman Filter Summary

- Highly efficient: Polynomial in measurement dimensionality  $k$  and state dimensionality  $n$ :  
 $O(k^{2.376} + n^2)$
- Optimal for linear Gaussian systems!
- Most robotics systems are nonlinear!

Going non-linear

# **EXTENDED KALMAN FILTER**




# Nonlinear Dynamic Systems

- Most realistic robotic problems involve nonlinear functions




$$x_t = g(u_t, x_{t-1})$$

$$z_t = h(x_t)$$




# Linearity Assumption Revisited

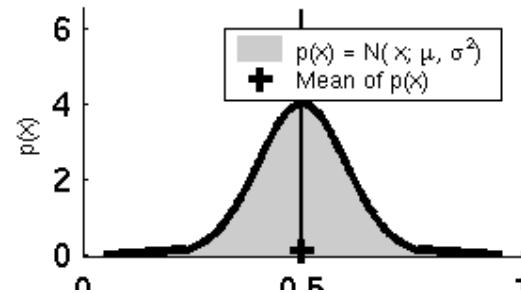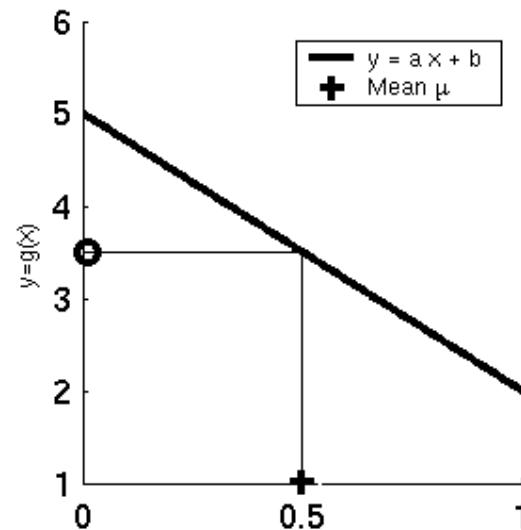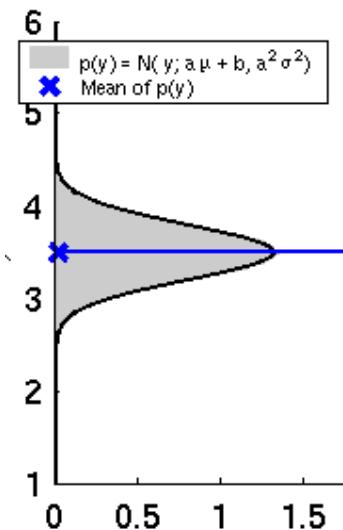




# Non-linear Function

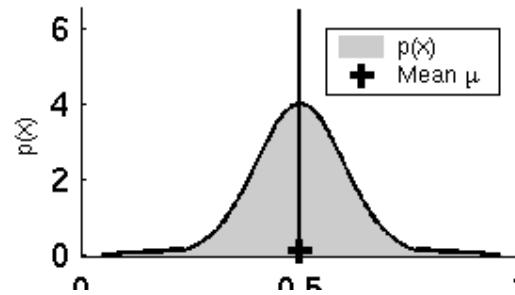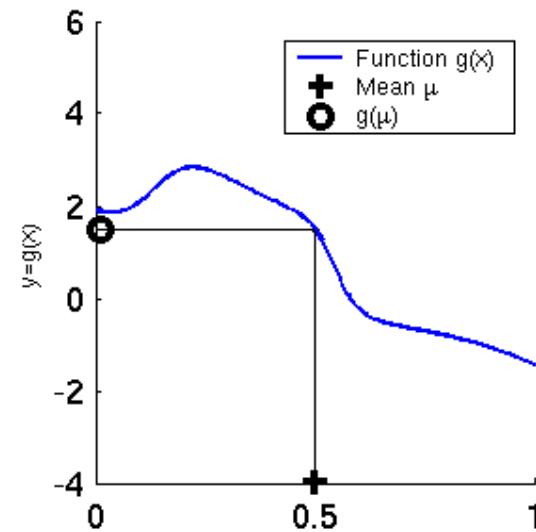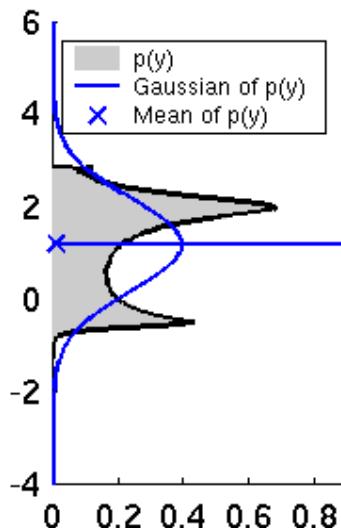




# EKF Linearization (1)

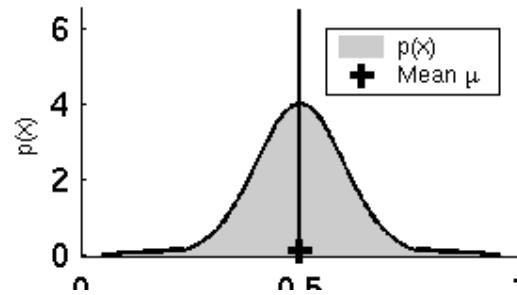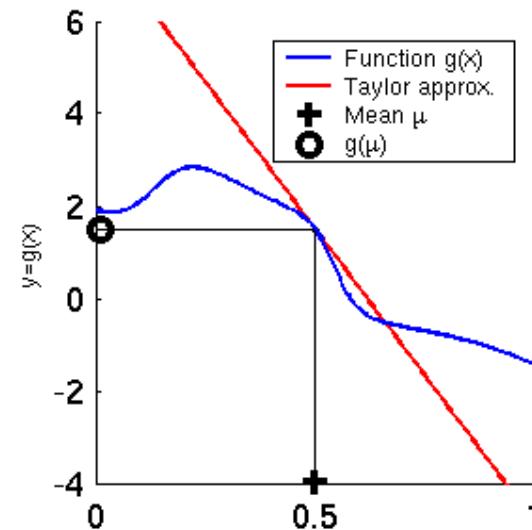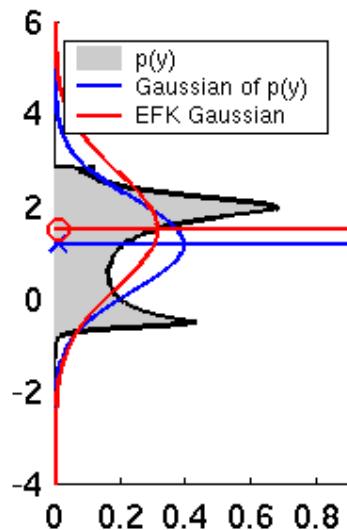

# EKF Linearization (2)

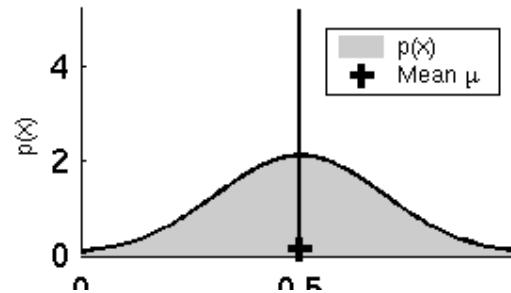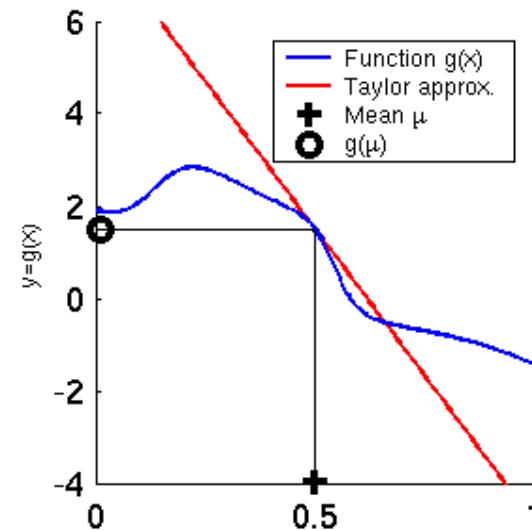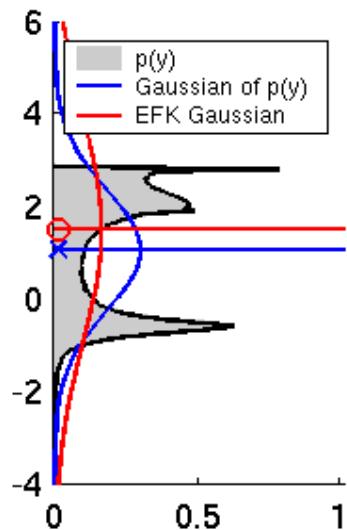

# EKF Linearization (3)

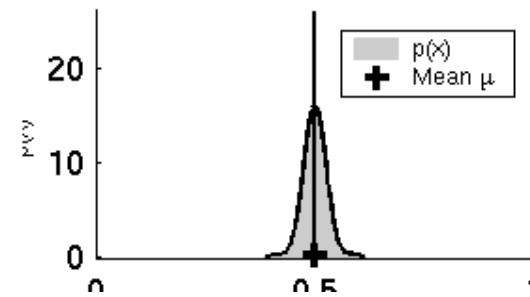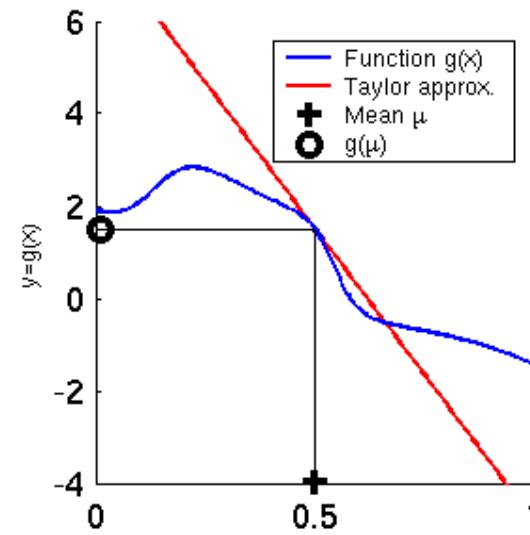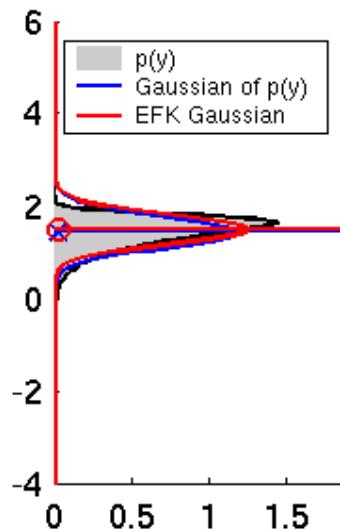

# EKF Linearization: First Order Taylor Series Expansion

- Prediction:

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}} (x_{t-1} - \mu_{t-1})$$

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + G_t (x_{t-1} - \mu_{t-1})$$

- Correction:

$$h(x_t) \approx h(\bar{\mu}_t) + \frac{\partial h(\bar{\mu}_t)}{\partial x_t} (x_t - \bar{\mu}_t)$$

$$h(x_t) \approx h(\bar{\mu}_t) + H_t (x_t - \bar{\mu}_t)$$

# EKF Algorithm

1. **Extended\_Kalman\_filter**( $\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$ ):

2. Prediction:

$$3. \bar{\mu}_t = g(u_t, \mu_{t-1})$$

$$\bar{\mu}_t = A_t \mu_{t-1} + B_t u_t$$

$$4. \bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + R_t$$

$$\bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t$$

5. Correction:

$$6. K_t = \bar{\Sigma}_t H_t^T (H_t \bar{\Sigma}_t H_t^T + Q_t)^{-1}$$

$$K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}$$

$$7. \mu_t = \bar{\mu}_t + K_t (z_t - h(\bar{\mu}_t))$$

$$\mu_t = \bar{\mu}_t + K_t (z_t - C_t \bar{\mu}_t)$$

$$8. \Sigma_t = (I - K_t H_t) \bar{\Sigma}_t$$

$$\Sigma_t = (I - K_t C_t) \bar{\Sigma}_t$$

9. Return  $\mu_t, \Sigma_t$

$$H_t = \frac{\partial h(\bar{\mu}_t)}{\partial x_t}$$


$$G_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}}$$

# Localization

“Using sensory information to locate the robot in its environment is the most fundamental problem to providing a mobile robot with autonomous capabilities.” [Cox ’91]

- **Given**
  - Map of the environment.
  - Sequence of sensor measurements.
- **Wanted**
  - Estimate of the robot’s position.
- **Problem classes**
  - Position tracking
  - Global localization
  - Kidnapped robot problem (recovery)

# Landmark-based Localization

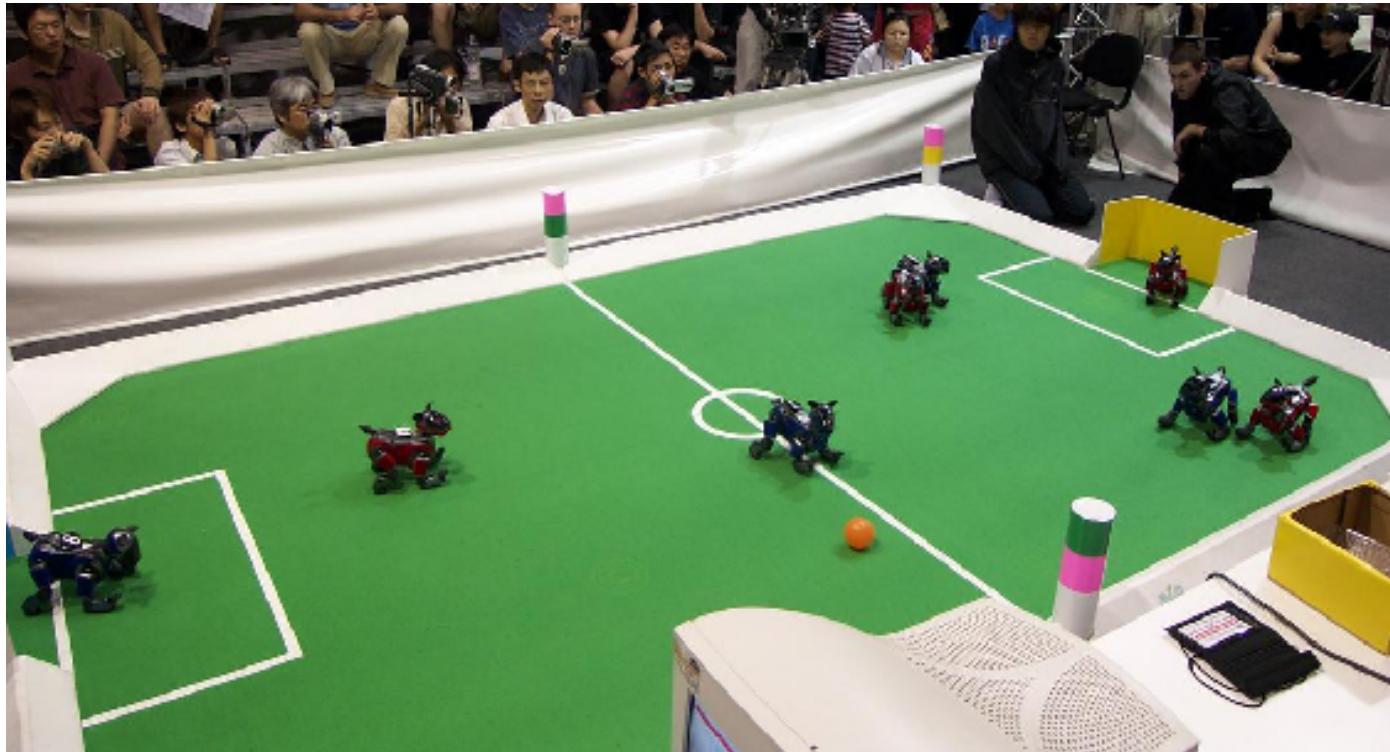

# 1. EKF\_localization ( $\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$ ):

**Prediction:**

$$2. G_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}} = \begin{pmatrix} \frac{\partial x'}{\partial \mu_{t-1,x}} & \frac{\partial x'}{\partial \mu_{t-1,y}} & \frac{\partial x'}{\partial \mu_{t-1,\theta}} \\ \frac{\partial y'}{\partial \mu_{t-1,x}} & \frac{\partial y'}{\partial \mu_{t-1,y}} & \frac{\partial y'}{\partial \mu_{t-1,\theta}} \\ \frac{\partial \theta'}{\partial \mu_{t-1,x}} & \frac{\partial \theta'}{\partial \mu_{t-1,y}} & \frac{\partial \theta'}{\partial \mu_{t-1,\theta}} \end{pmatrix}$$

Jacobian of  $g$  w.r.t location

$$3. V_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial u_t} = \begin{pmatrix} \frac{\partial x'}{\partial v_t} & \frac{\partial x'}{\partial \omega_t} \\ \frac{\partial y'}{\partial v_t} & \frac{\partial y'}{\partial \omega_t} \\ \frac{\partial \theta'}{\partial v_t} & \frac{\partial \theta'}{\partial \omega_t} \end{pmatrix}$$

Jacobian of  $g$  w.r.t control

$$4. M_t = \begin{pmatrix} \alpha_1 v_t^2 + \alpha_2 \omega_t^2 & 0 \\ 0 & \alpha_3 v_t^2 + \alpha_4 \omega_t^2 \end{pmatrix}$$

Motion noise





$$5. \bar{\mu}_t = g(u_t, \mu_{t-1})$$

$$6. \bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + V_t M_t V_t^T$$

Predicted mean

Predicted covariance

# EKF Prediction Step

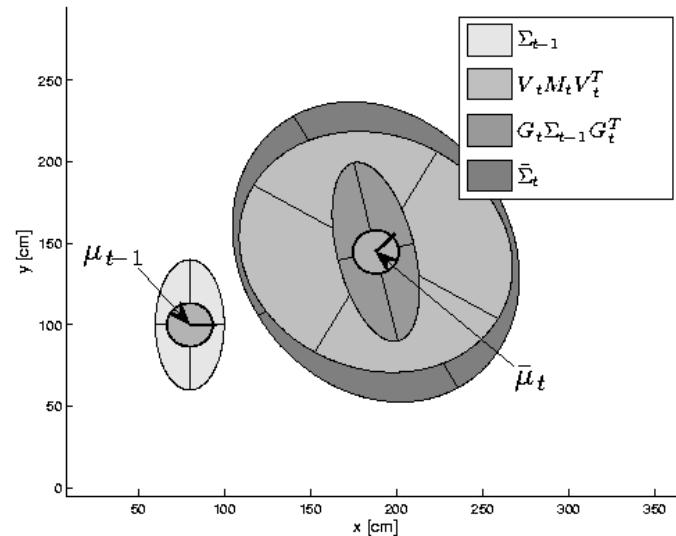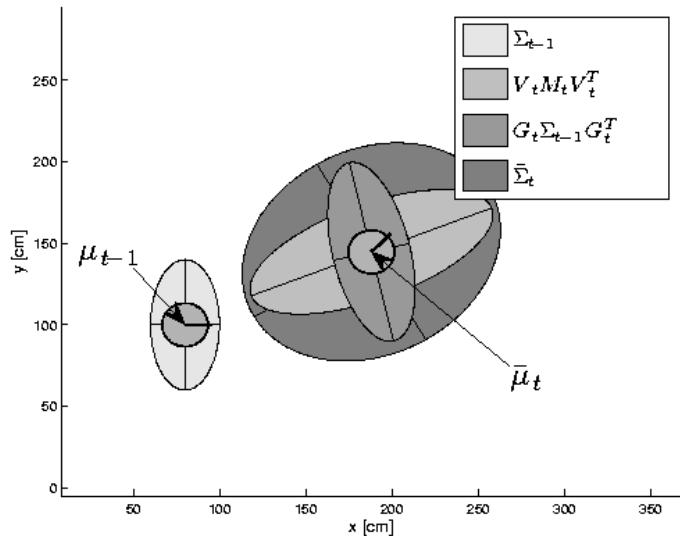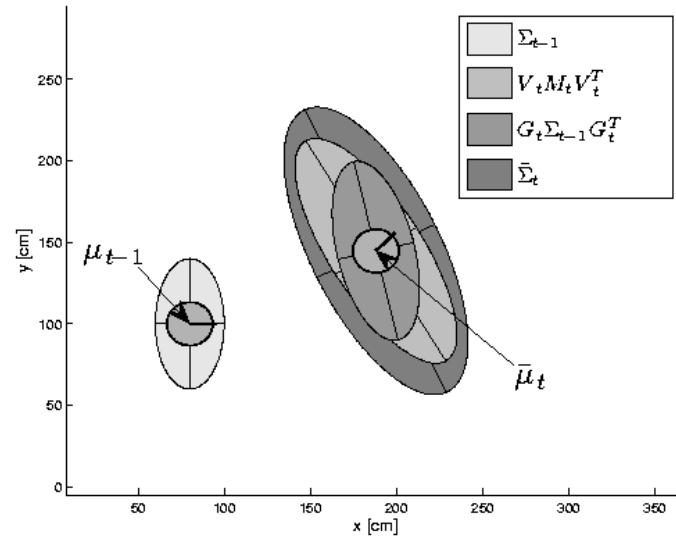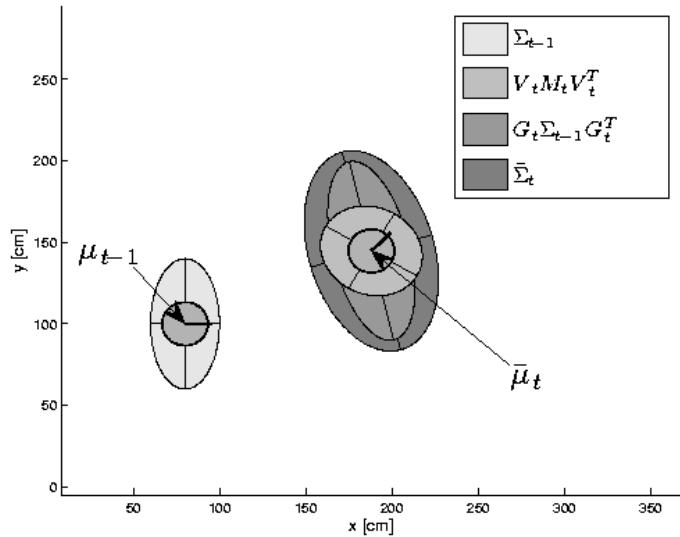

# 1. EKF\_localization ( $\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$ ):

**Correction:**

2.  $\hat{z}_t = \begin{pmatrix} \sqrt{(m_x - \bar{\mu}_{t,x})^2 + (m_y - \bar{\mu}_{t,y})^2} \\ \text{atan } 2(m_y - \bar{\mu}_{t,y}, m_x - \bar{\mu}_{t,x}) - \bar{\mu}_{t,\theta} \end{pmatrix}$  Predicted measurement mean

3.  $H_t = \frac{\partial h(\bar{\mu}_t, m)}{\partial x_t} = \begin{pmatrix} \frac{\partial r_t}{\partial \bar{\mu}_{t,x}} & \frac{\partial r_t}{\partial \bar{\mu}_{t,y}} & \frac{\partial r_t}{\partial \bar{\mu}_{t,\theta}} \\ \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,x}} & \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,y}} & \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,\theta}} \end{pmatrix}$  Jacobian of  $h$  w.r.t location

4.  $Q_t = \begin{pmatrix} \sigma_r^2 & 0 \\ 0 & \sigma_r^2 \end{pmatrix}$

5.  $S_t = H_t \bar{\Sigma}_t H_t^T + Q_t$

6.  $K_t = \bar{\Sigma}_t H_t^T S_t^{-1}$

7.  $\mu_t = \bar{\mu}_t + K_t(z_t - \hat{z}_t)$

8.  $\Sigma_t = (I - K_t H_t) \bar{\Sigma}_t$





Pred. measurement covariance

Kalman gain





Updated mean

Updated covariance



# EKF Observation Prediction Step

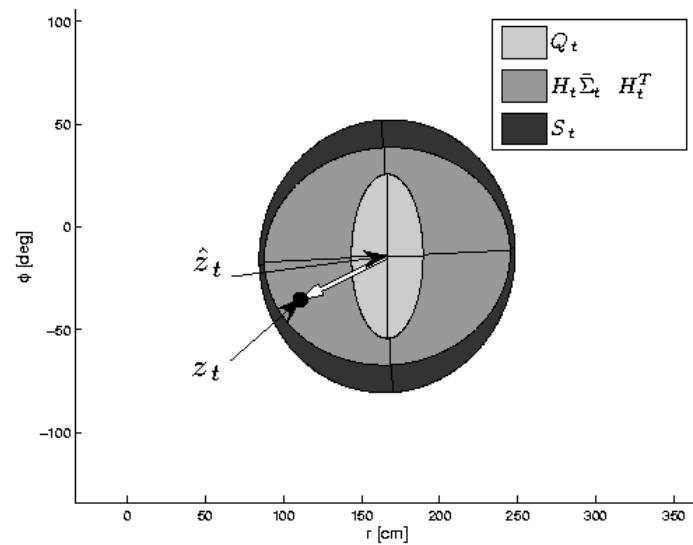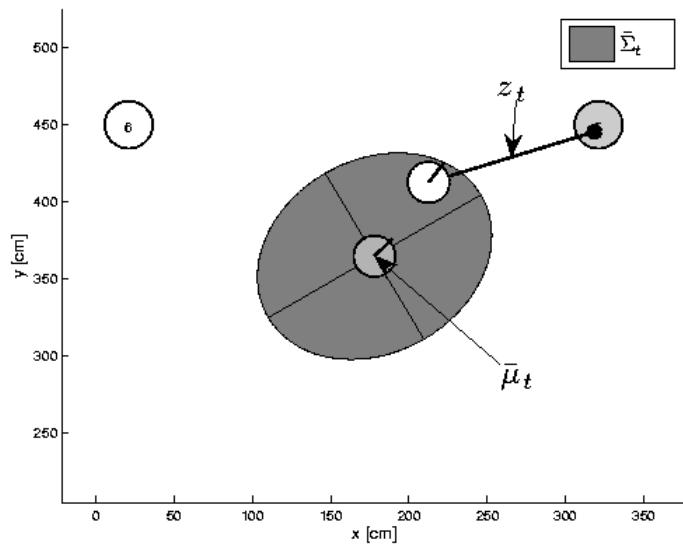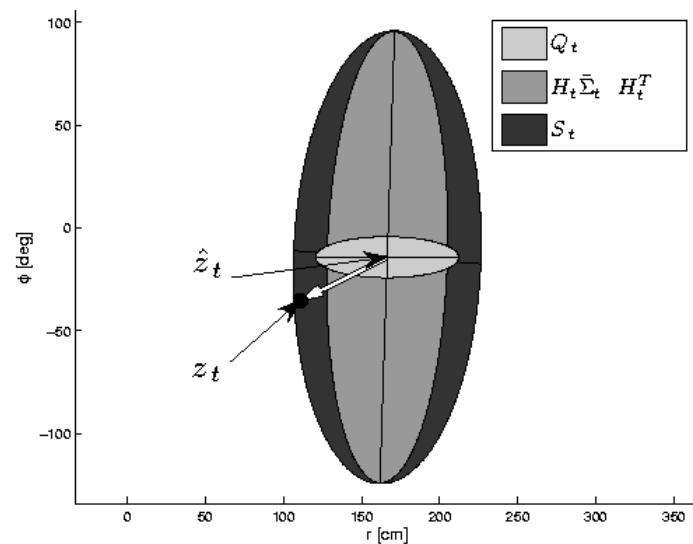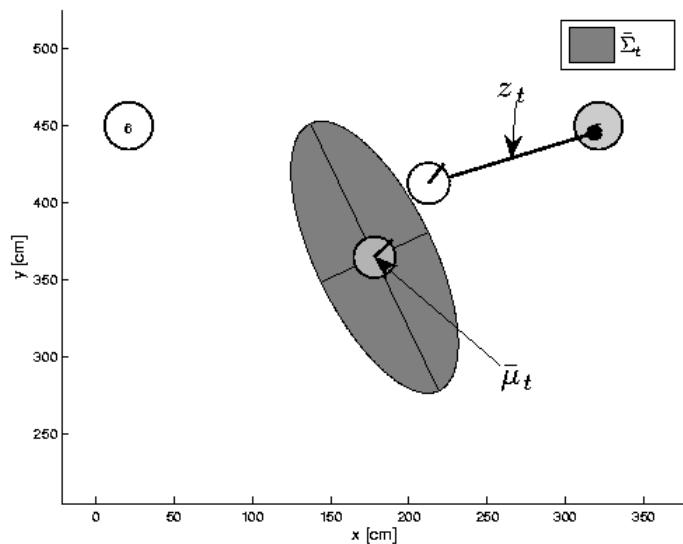



# EKF Correction Step

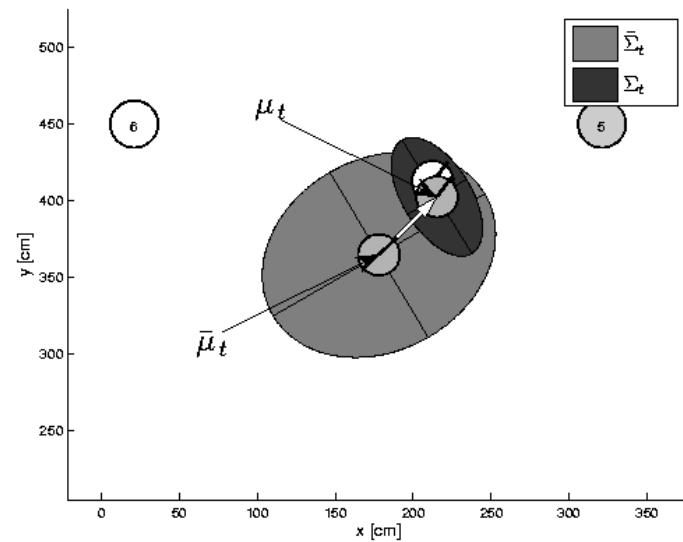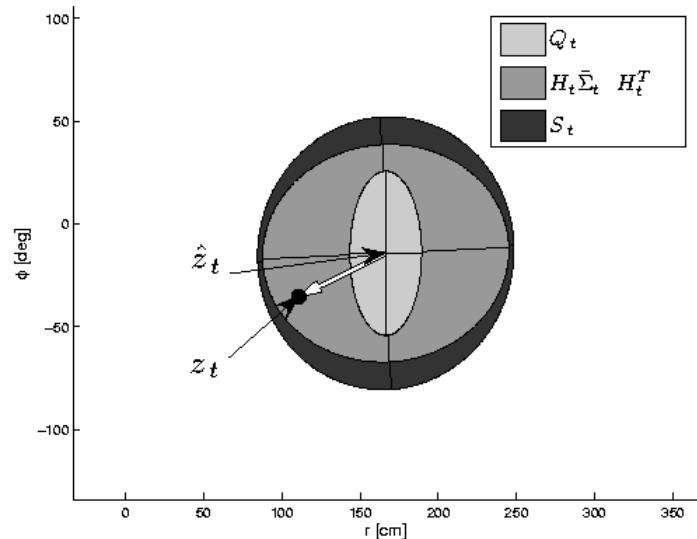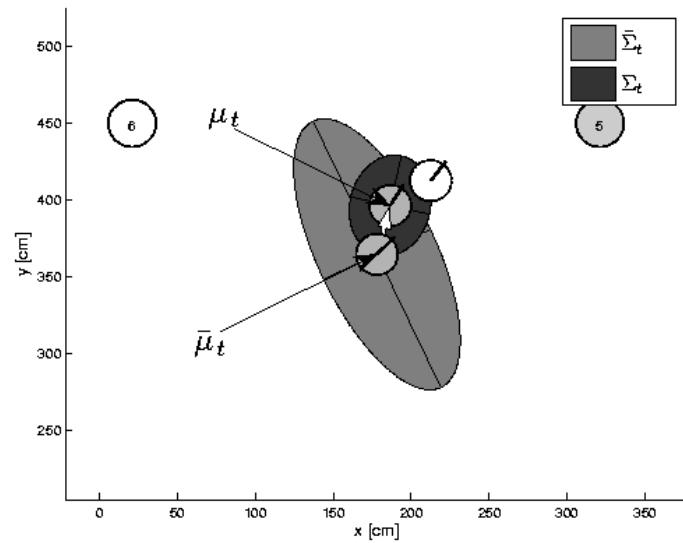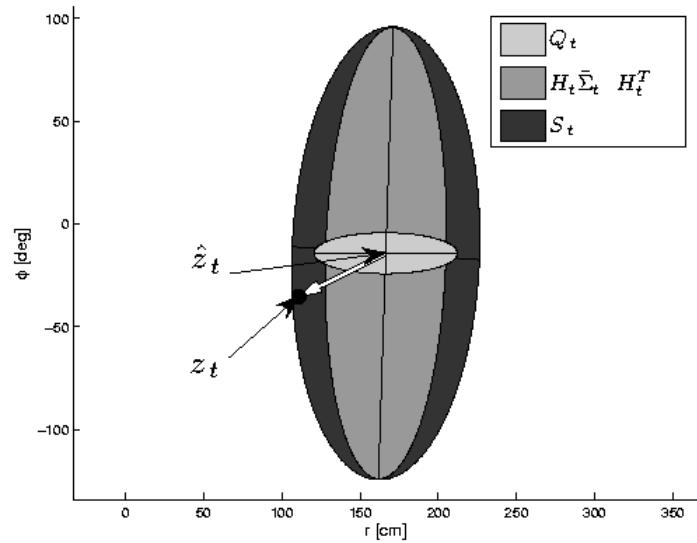


# Estimation Sequence (1)

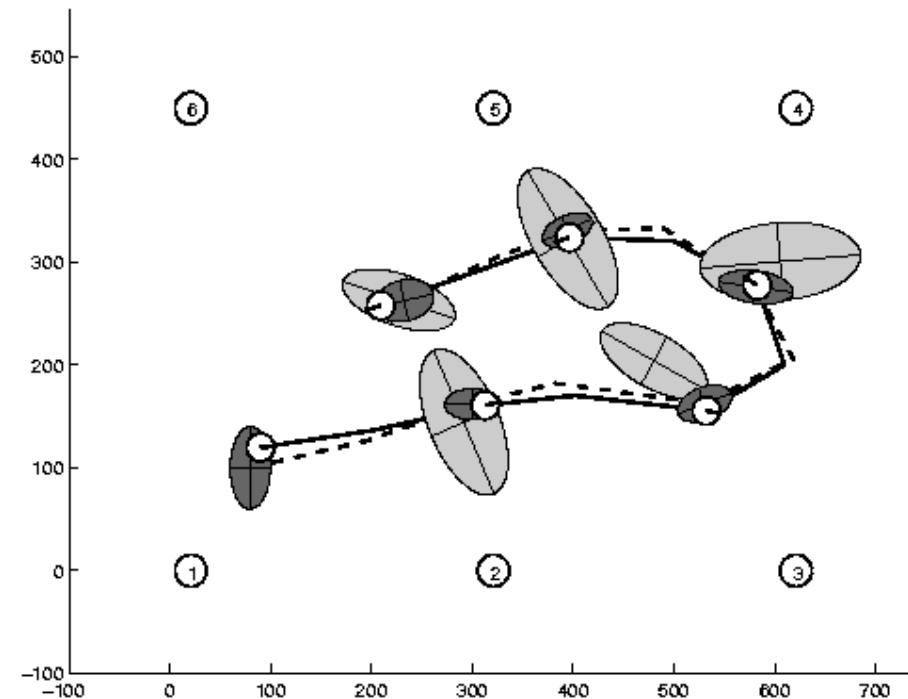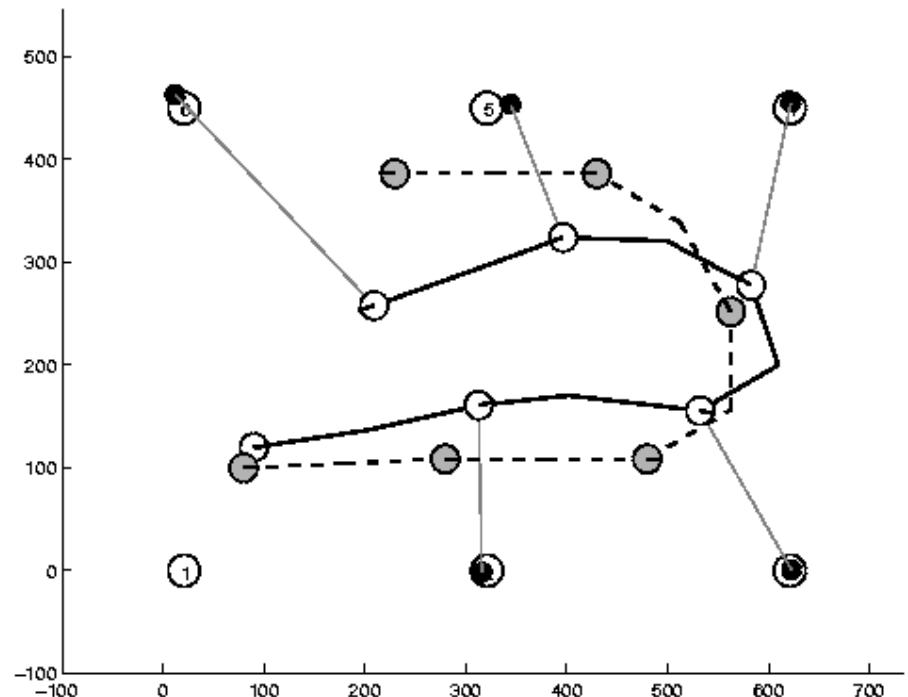

# Estimation Sequence (2)

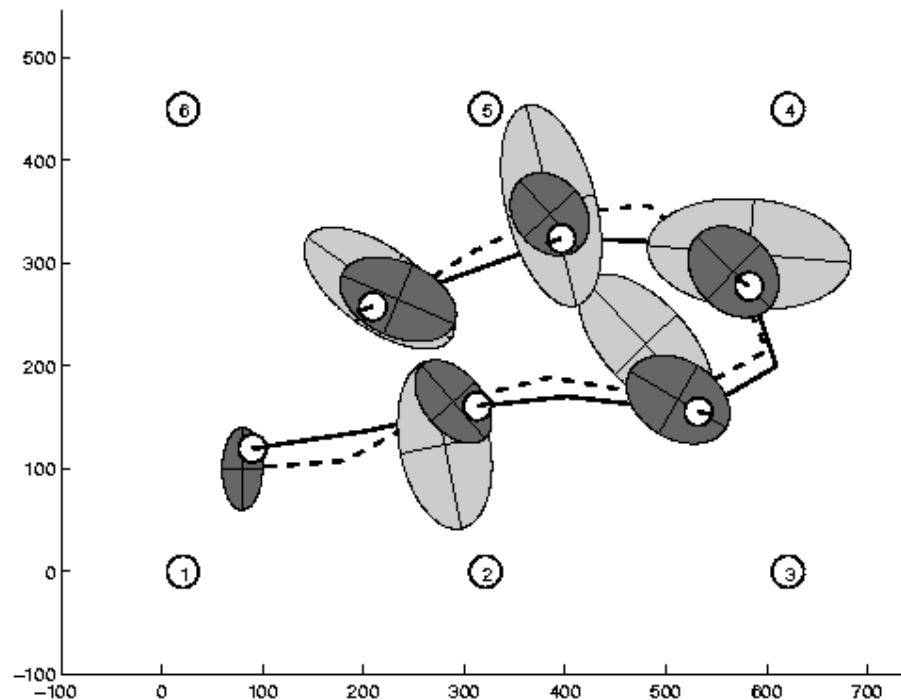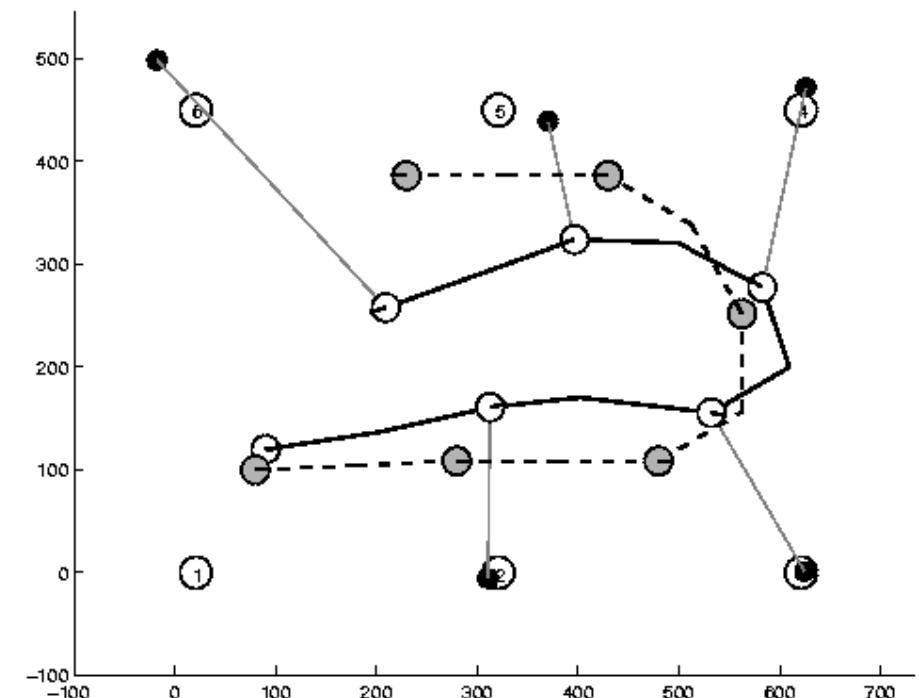

# Comparison to GroundTruth

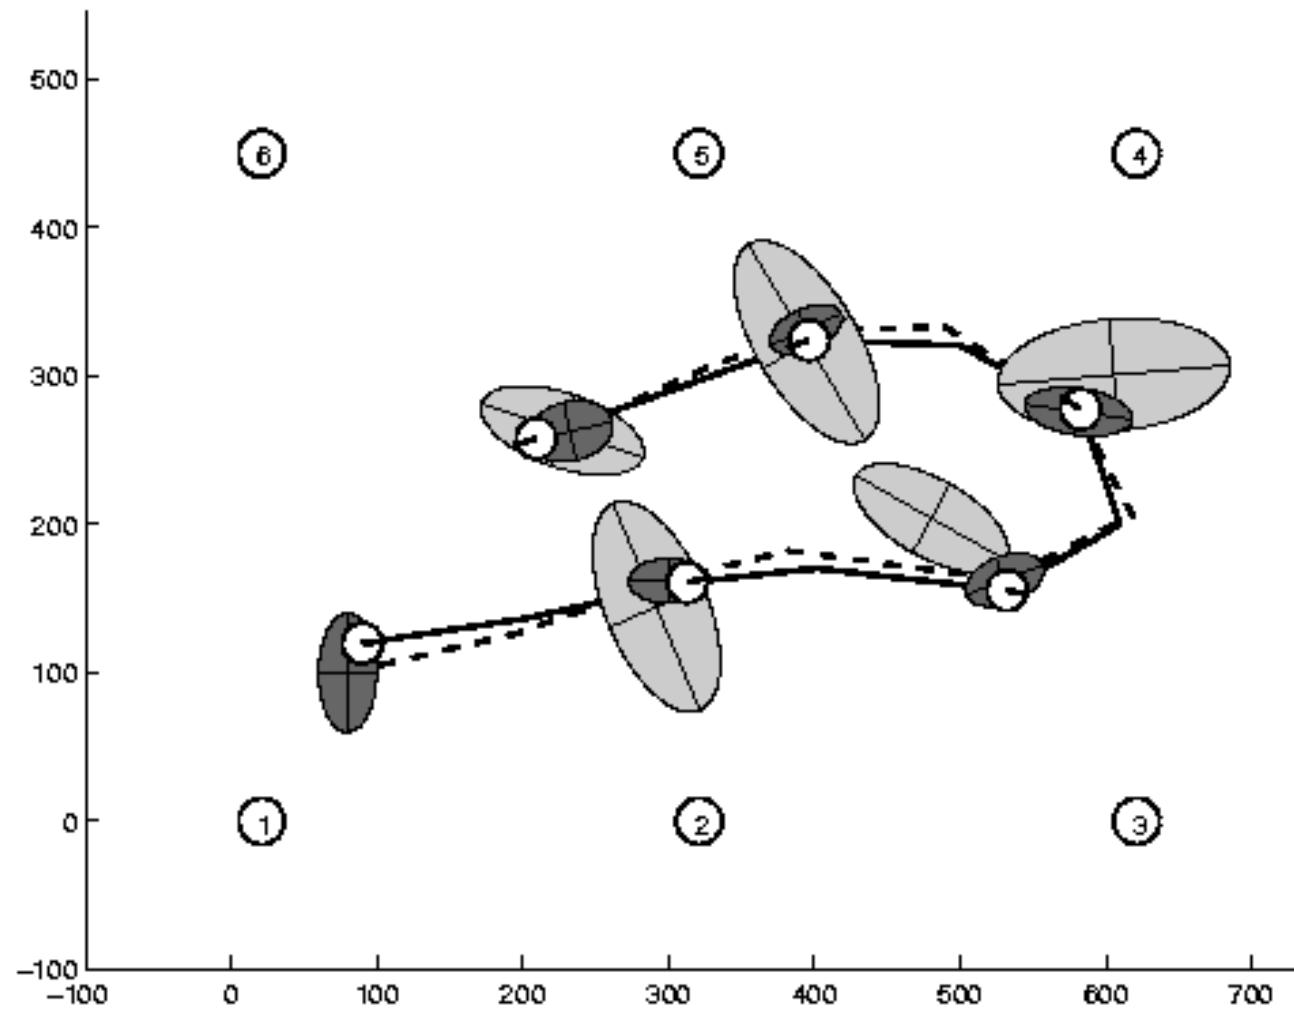


# EKF Summary

- Highly efficient: Polynomial in measurement dimensionality  $k$  and state dimensionality  $n$ :  
$$O(k^{2.376} + n^2)$$
- Not optimal!
- Can diverge if nonlinearities are large!
- Works surprisingly well even when all assumptions are violated!


Going unscented

# **UNSCENTED KALMAN FILTER**



# Linearization via Unscented Transform

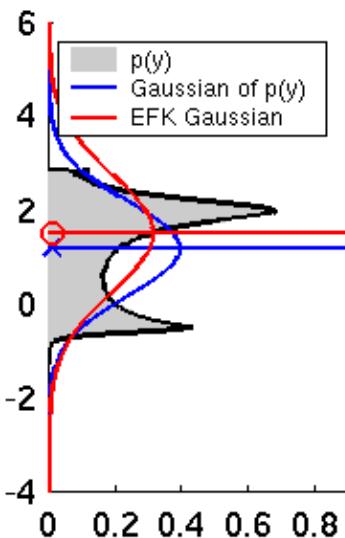


EKF

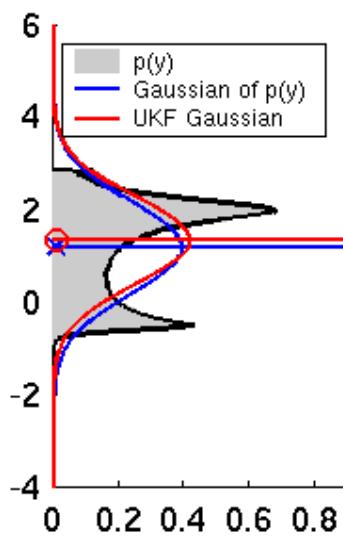


UKF

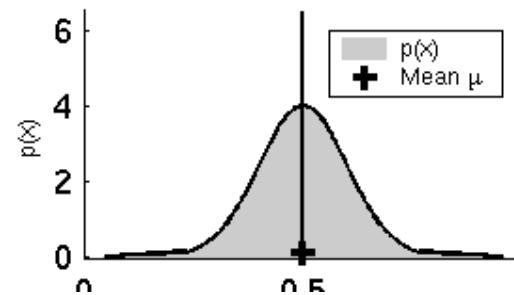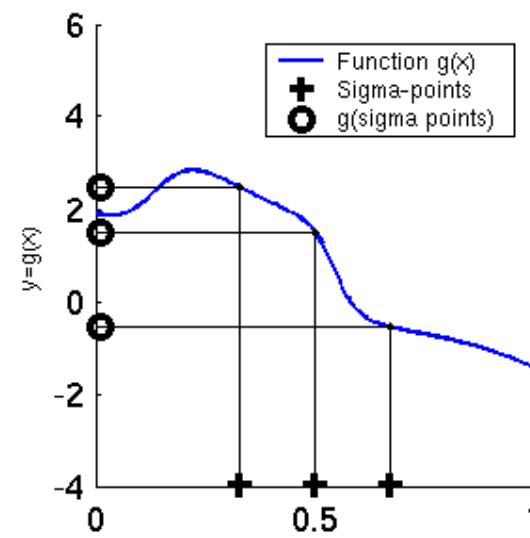



# UKF Sigma-Point Estimate (2)

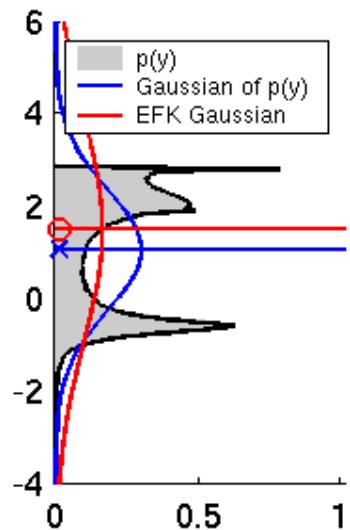


EKF

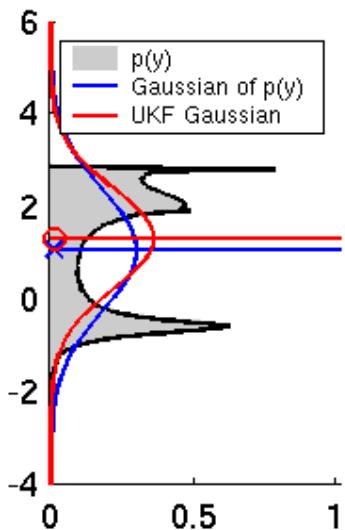


UKF

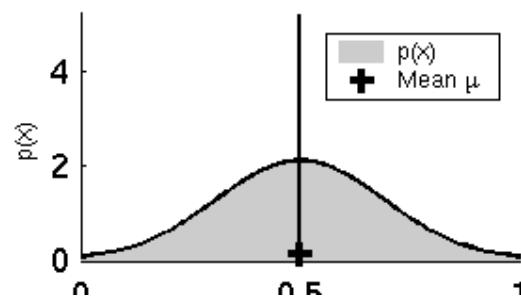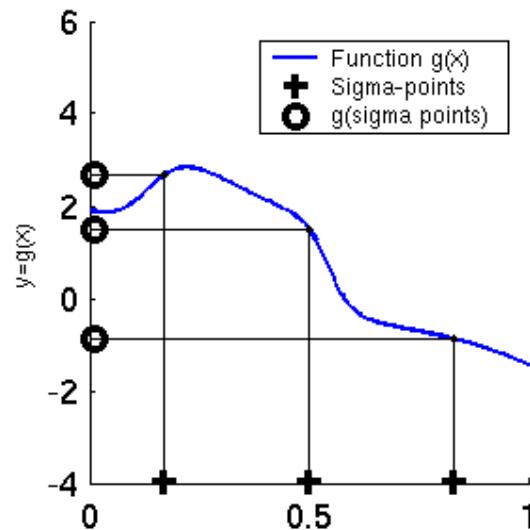



# UKF Sigma-Point Estimate (3)

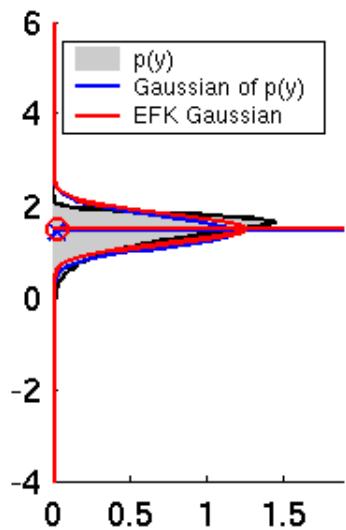

EKF

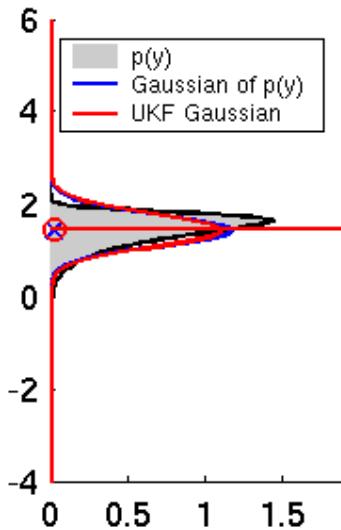

UKF

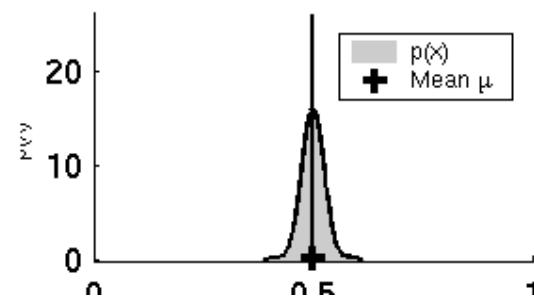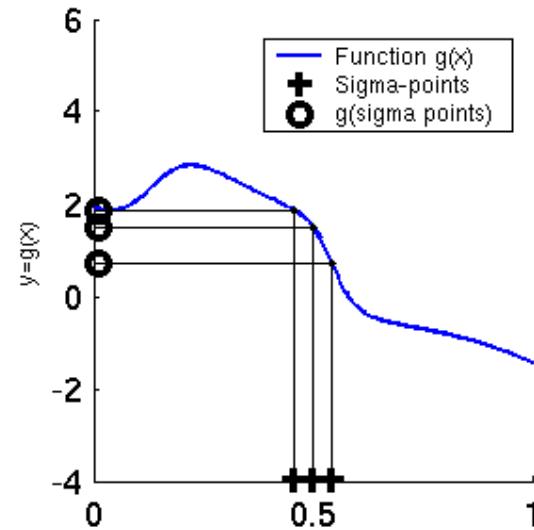

# Unscented Transform

Sigma points

$$\chi^0 = \mu$$

$$\chi^i = \mu \pm \left( \sqrt{(n + \lambda) \Sigma} \right)_i$$

Weights

$$w_m^0 = \frac{\lambda}{n + \lambda} \quad w_c^0 = \frac{\lambda}{n + \lambda} + (1 - \alpha^2 + \beta)$$

$$w_m^i = w_c^i = \frac{1}{2(n + \lambda)} \quad \text{for } i = 1, \dots, 2n$$

Pass sigma points through nonlinear function

$$\psi^i = g(\chi^i)$$

Recover mean and covariance

$$\mu' = \sum_{i=0}^{2n} w_m^i \psi^i$$

$$\Sigma' = \sum_{i=0}^{2n} w_c^i (\psi^i - \mu)(\psi^i - \mu)^T$$

**UKF\_predict** ( $\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$ ):

**Prediction:**

$$M_t = \begin{pmatrix} (\alpha_1 |v_t| + \alpha_2 |\omega_t|)^2 & 0 \\ 0 & (\alpha_3 |v_t| + \alpha_4 |\omega_t|)^2 \end{pmatrix}$$

Motion noise

$$Q_t = \begin{pmatrix} \sigma_r^2 & 0 \\ 0 & \sigma_r^2 \end{pmatrix}$$

$$\mu_{t-1}^a = \begin{pmatrix} \mu_{t-1}^T & (0\ 0)^T & (0\ 0)^T \end{pmatrix}$$

$$\Sigma_{t-1}^a = \begin{pmatrix} \Sigma_{t-1} & 0 & 0 \\ 0 & M_t & 0 \\ 0 & 0 & Q_t \end{pmatrix}$$

$$\chi_{t-1}^a = \begin{pmatrix} \mu_{t-1}^a & \mu_{t-1}^a + \gamma \sqrt{\Sigma_{t-1}^a} & \mu_{t-1}^a - \gamma \sqrt{\Sigma_{t-1}^a} \end{pmatrix}$$

Sigma points

$$\bar{\chi}_t^x = g(u_t + \chi_t^u, \chi_{t-1}^x)$$

Prediction of sigma points

$$\bar{\mu}_t = \sum_{i=0}^{2L} w_m^i \chi_{i,t}^x$$

Predicted mean

$$\bar{\Sigma}_t = \sum_{i=0}^{2L} w_c^i (\chi_{i,t}^x - \bar{\mu}_t) (\chi_{i,t}^x - \bar{\mu}_t)^T$$

Predicted covariance

**UKF\_correct** ( $\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$ ):

**Correction:**

$$\bar{Z}_t = h(\chi_t^x) + \chi_t^z$$

Measurement sigma points

$$\hat{z}_t = \sum_{i=0}^{2L} w_m^i \bar{Z}_{i,t}$$

Predicted measurement mean

$$S_t = \sum_{i=0}^{2L} w_c^i (\bar{Z}_{i,t} - \hat{z}_t)(\bar{Z}_{i,t} - \hat{z}_t)^T$$

Pred. measurement covariance

$$\Sigma_t^{x,z} = \sum_{i=0}^{2L} w_c^i (\bar{\chi}_{i,t}^x - \bar{\mu}_t)(\bar{Z}_{i,t} - \hat{z}_t)^T$$

Cross-covariance

$$K_t = \Sigma_t^{x,z} S_t^{-1}$$

Kalman gain





$$\mu_t = \bar{\mu}_t + K_t(z_t - \hat{z}_t)$$

Updated mean





$$\Sigma_t = \bar{\Sigma}_t - K_t S_t K_t^T$$

Updated covariance





# UKF Prediction Step

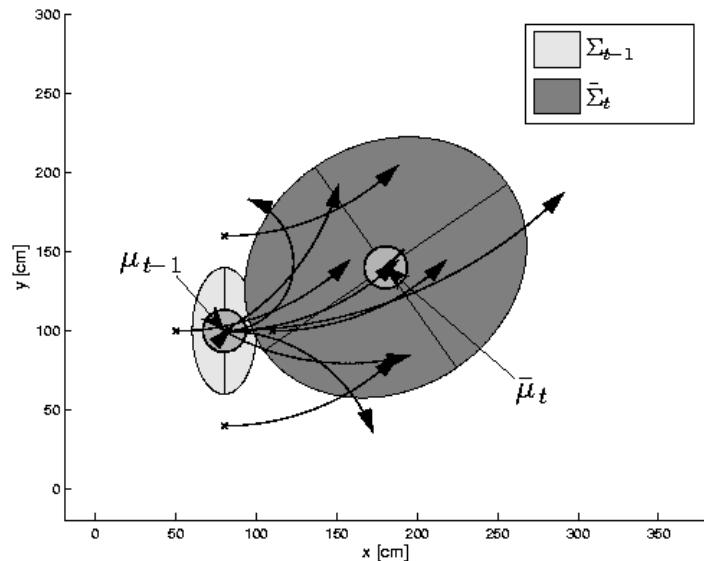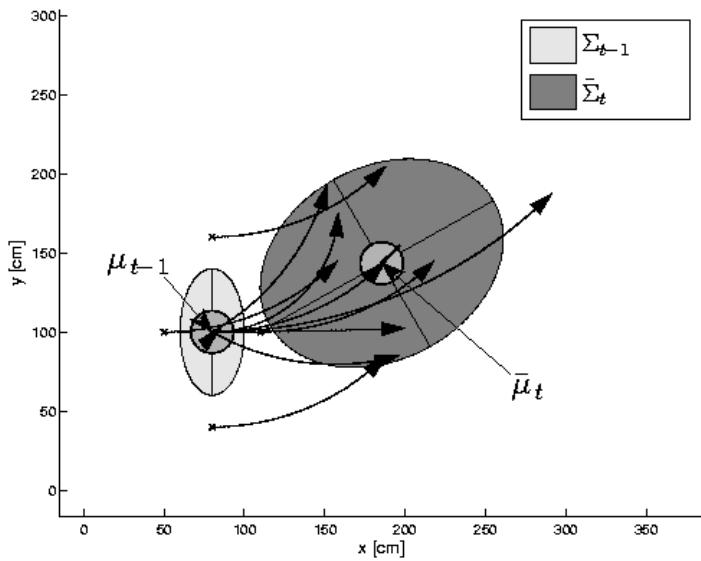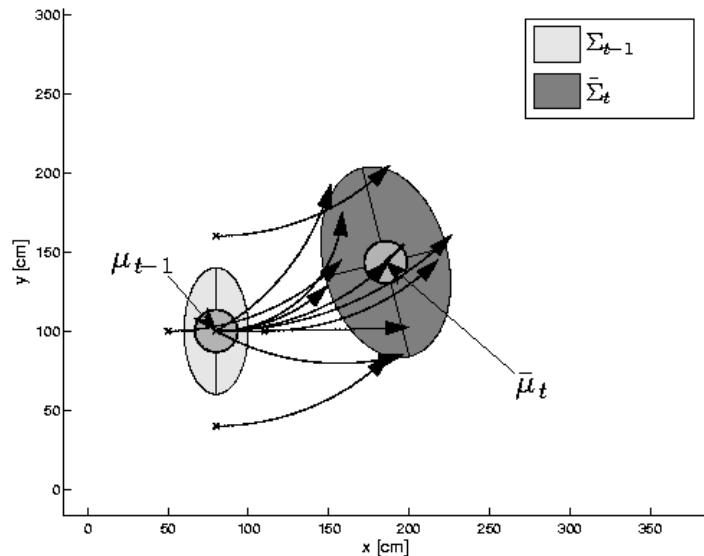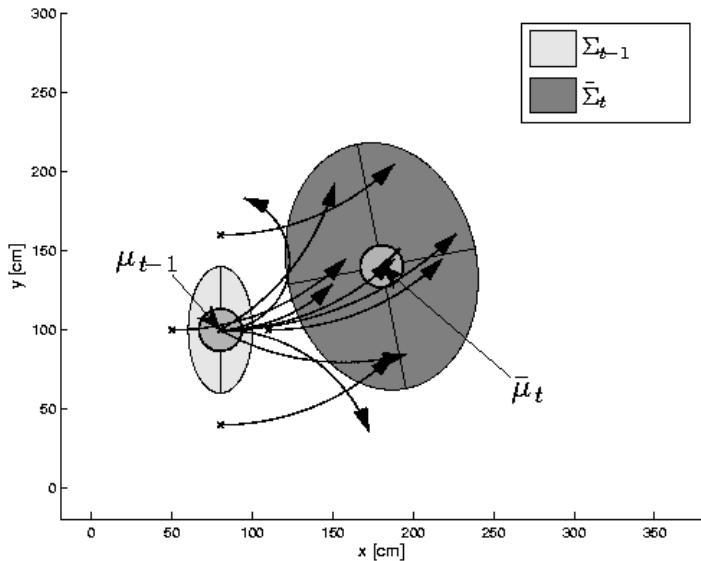





# UKF Observation Prediction Step

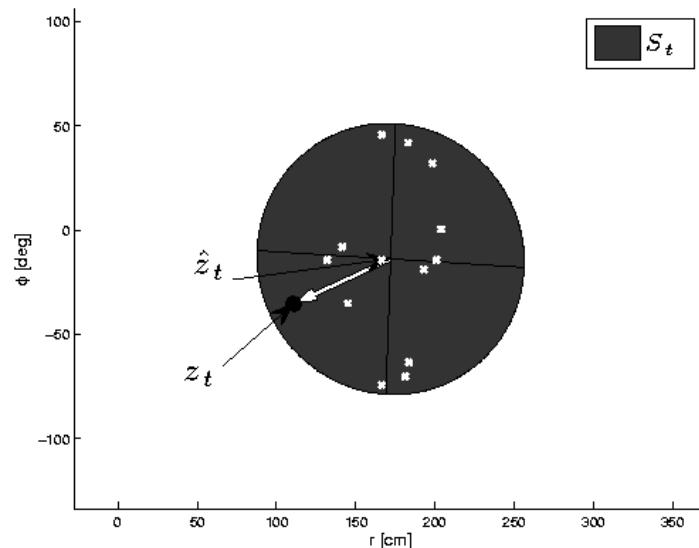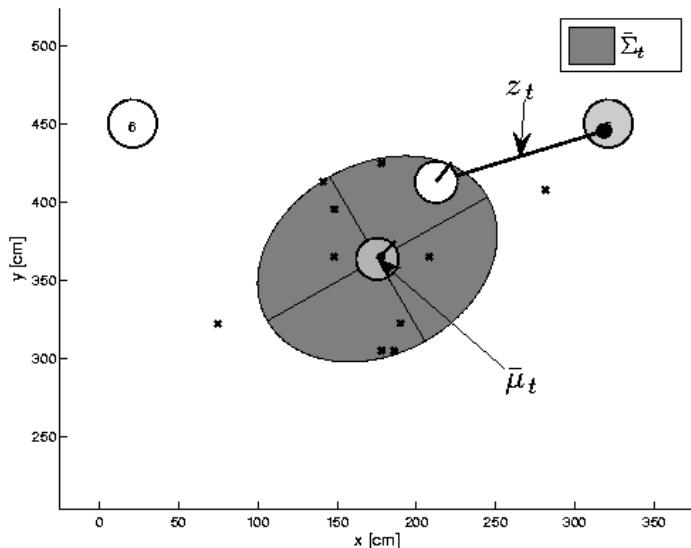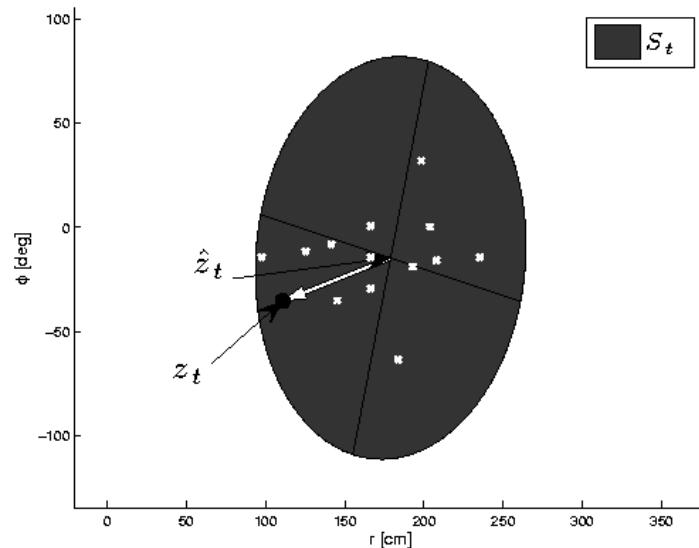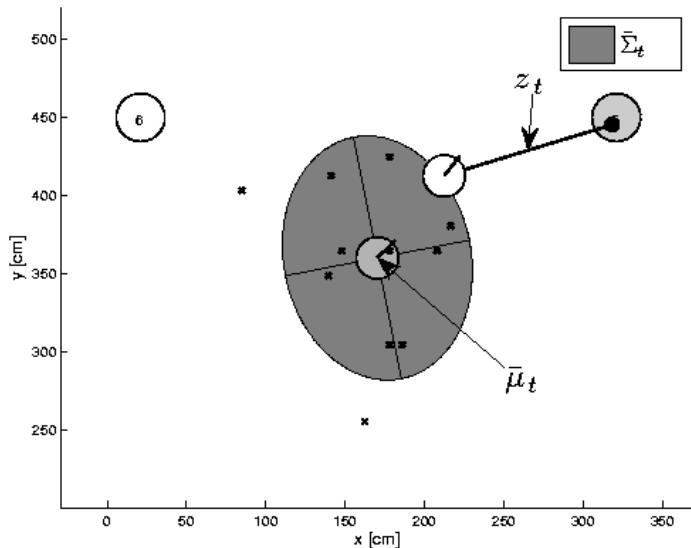


# UKF Correction Step

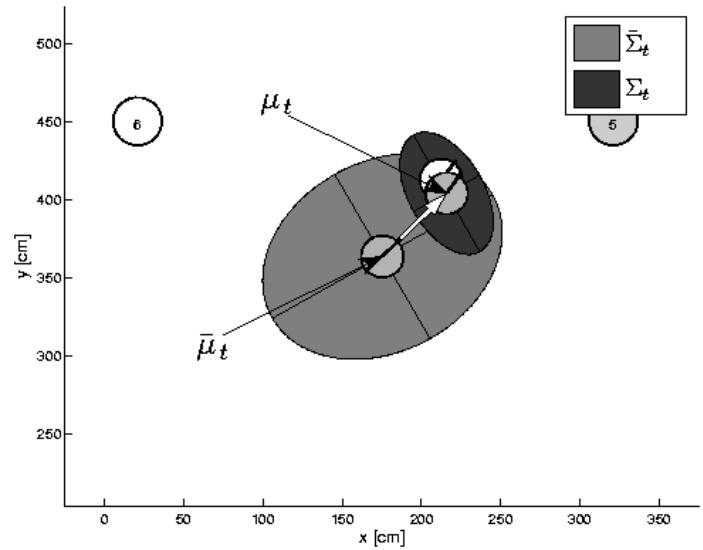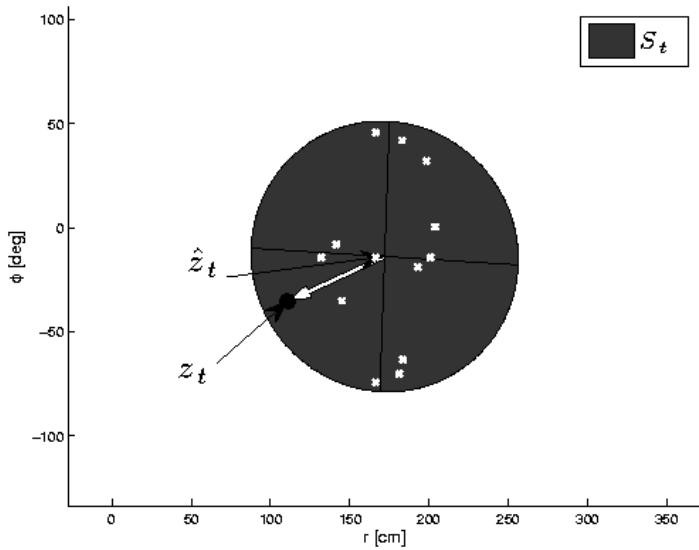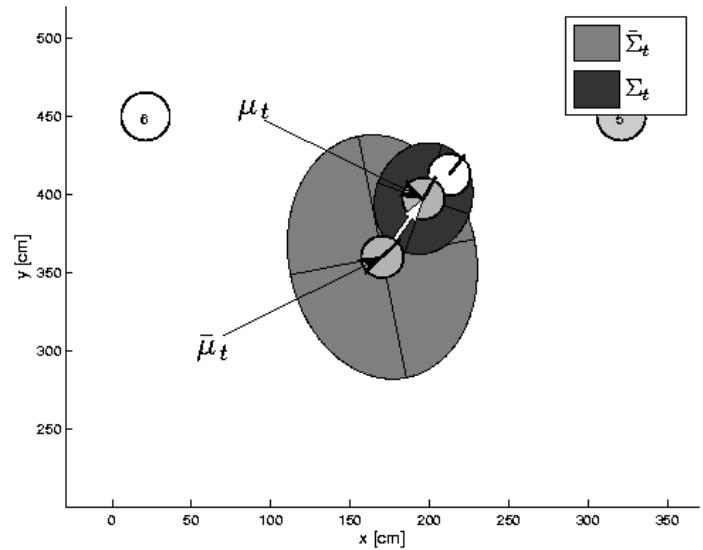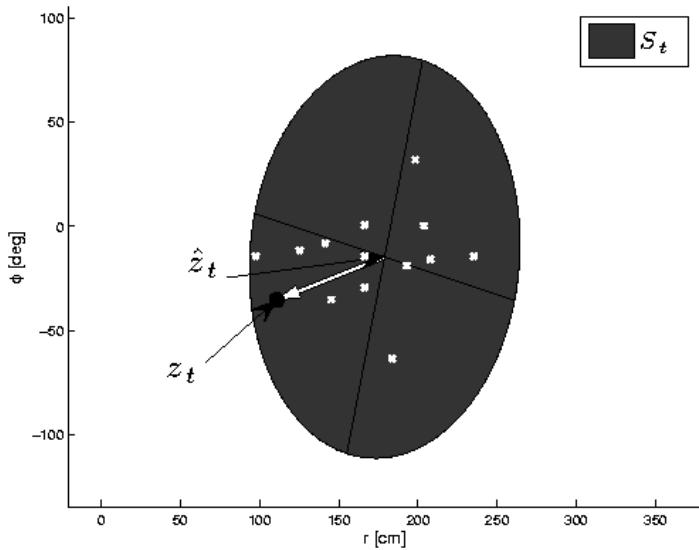


# EKF Correction Step

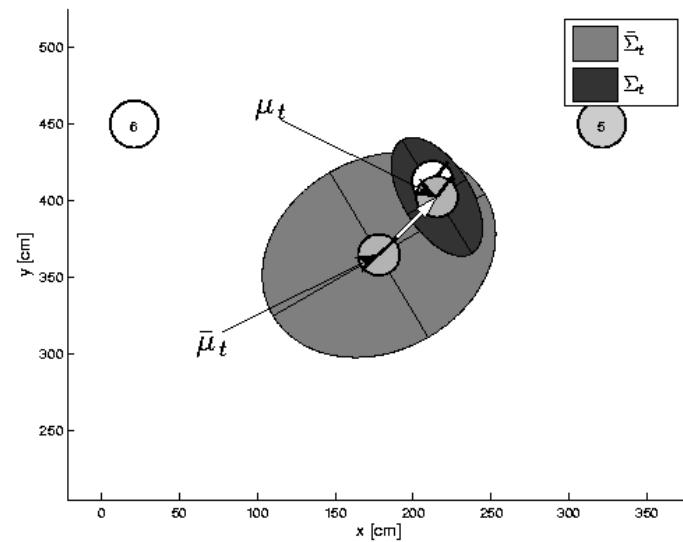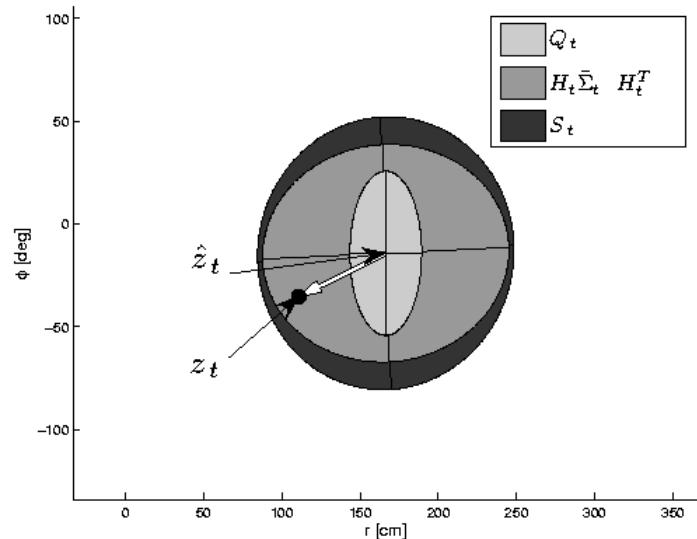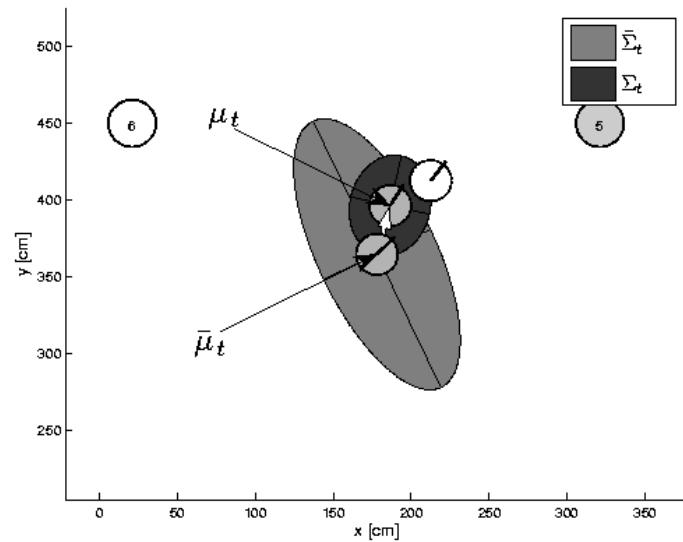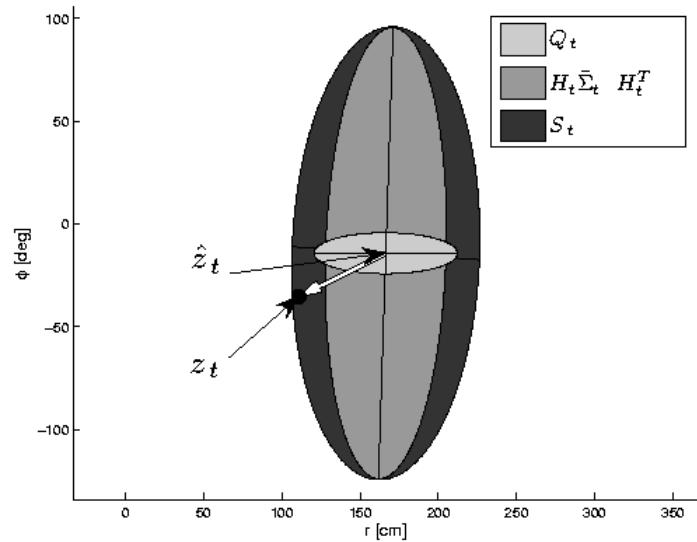


# Estimation Sequence

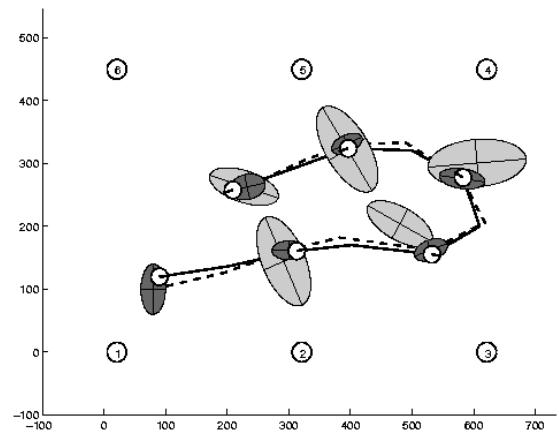

EKF

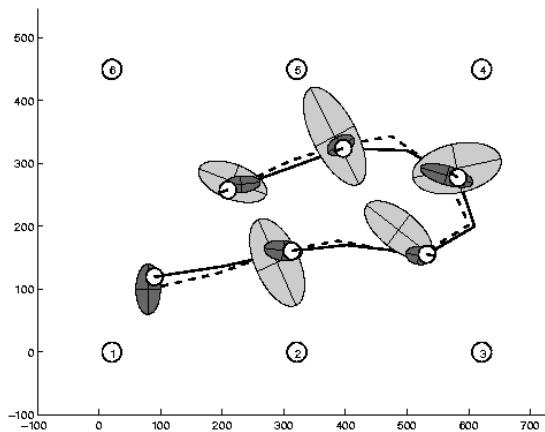


PF

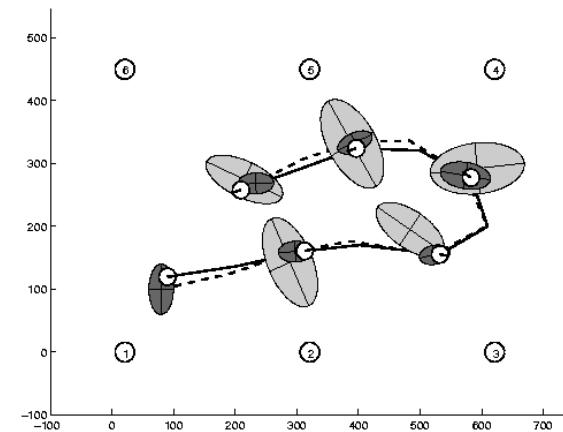


UKF

# Estimation Sequence

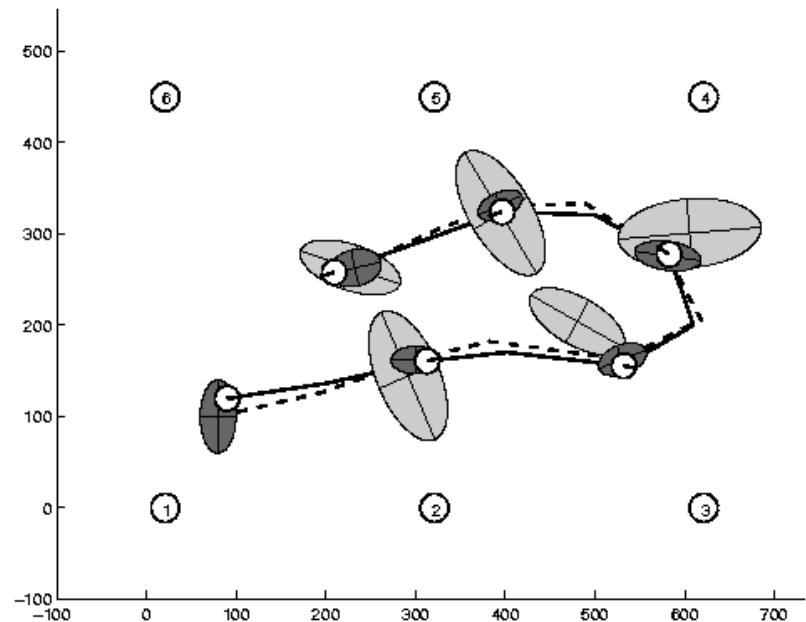


EKF

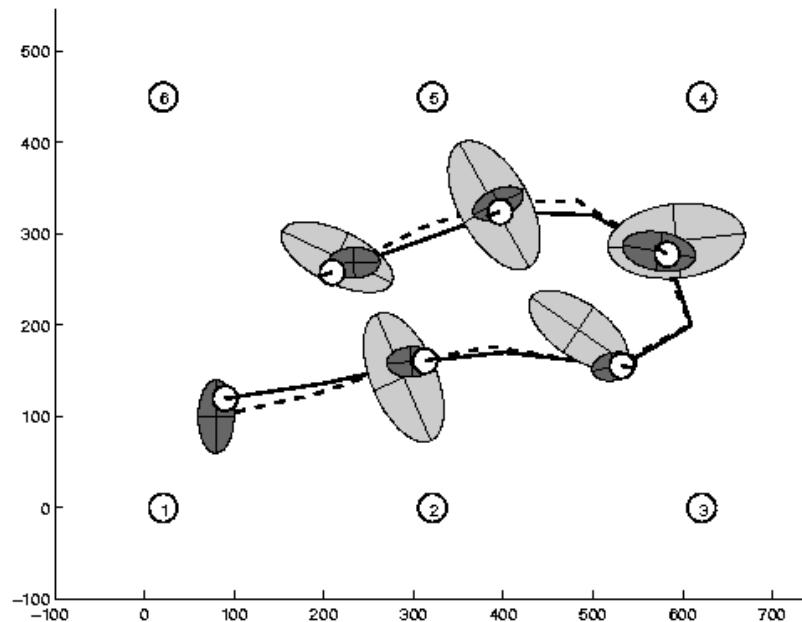


UKF

# Prediction Quality

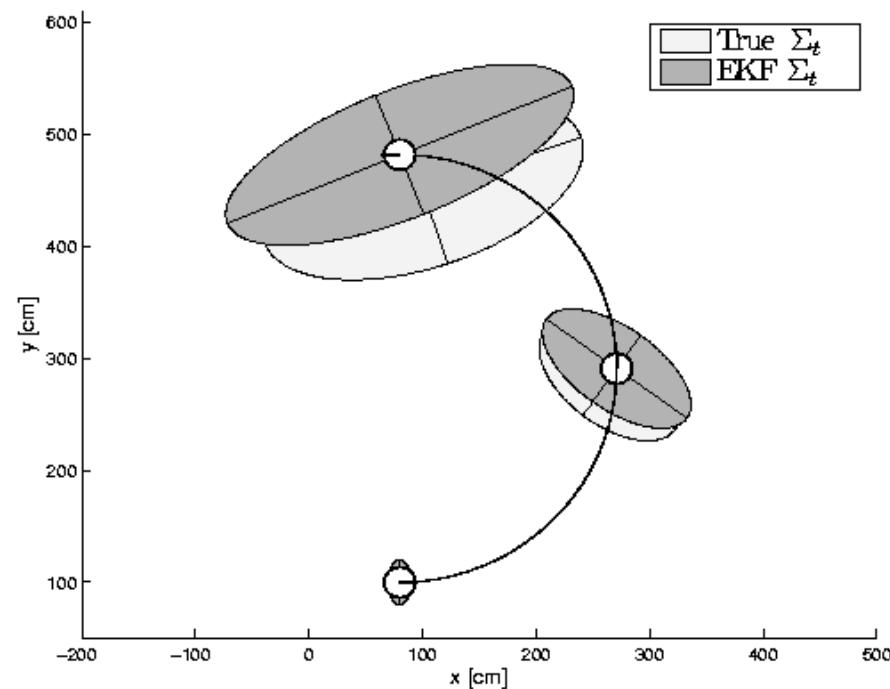

EKF

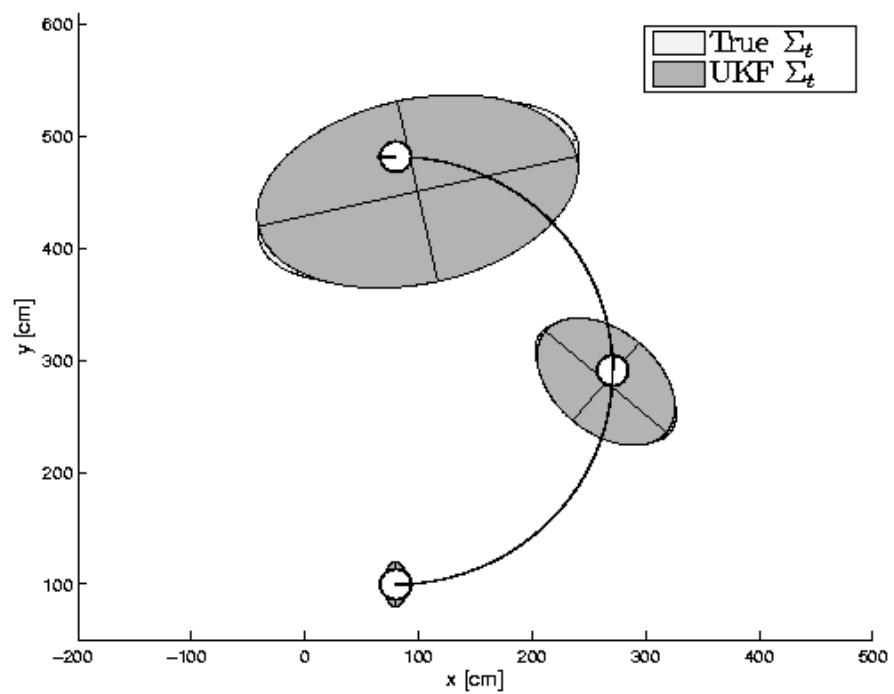


UKF

# UKF Summary


- **Highly efficient:** Same complexity as EKF, with a constant factor slower in typical practical applications
- **Better linearization than EKF:** Accurate in first two terms of Taylor expansion (EKF only first term)
- **Derivative-free:** No Jacobians needed
- **Still not optimal!**

# Kalman Filter-based System

- [Arras et al. 98]:
  - Laser range-finder and vision
  - High precision (<1cm accuracy)

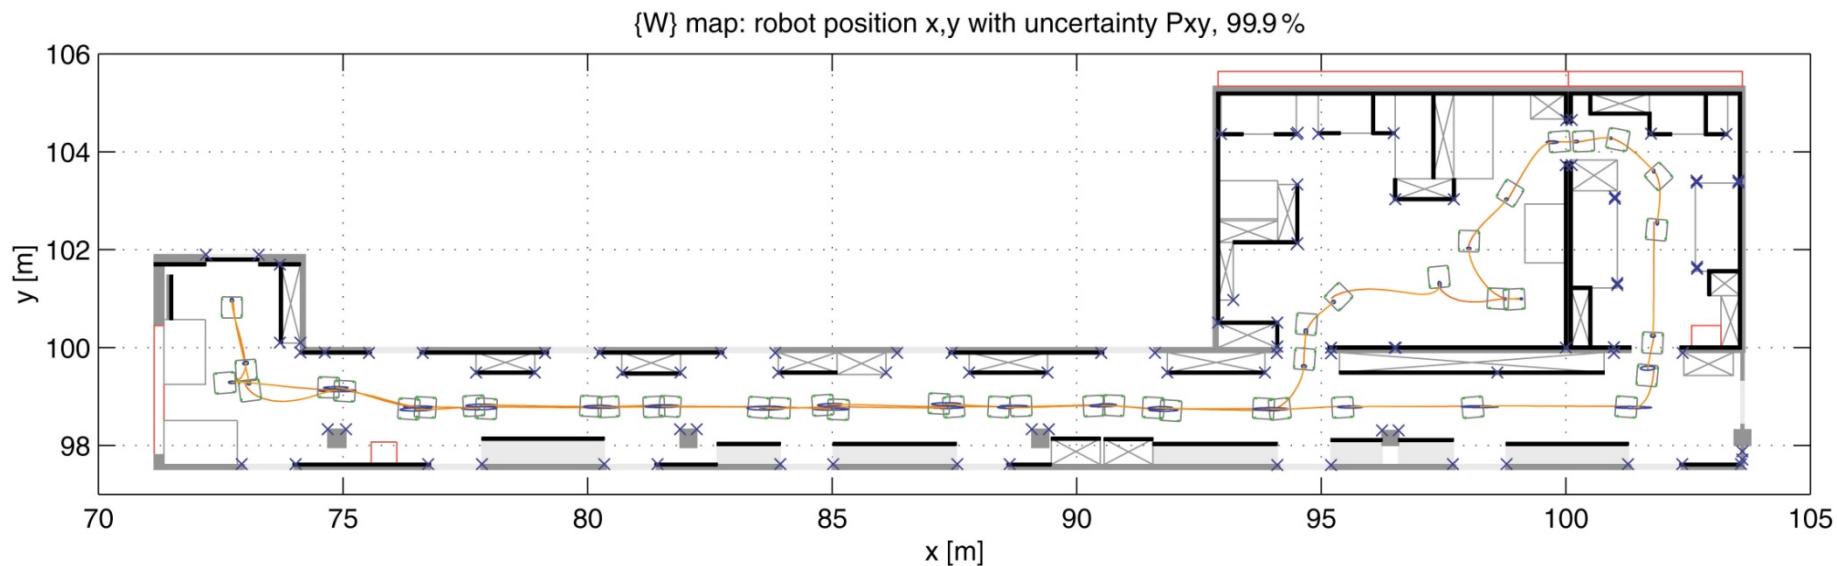

# Multi-hypothesis Tracking

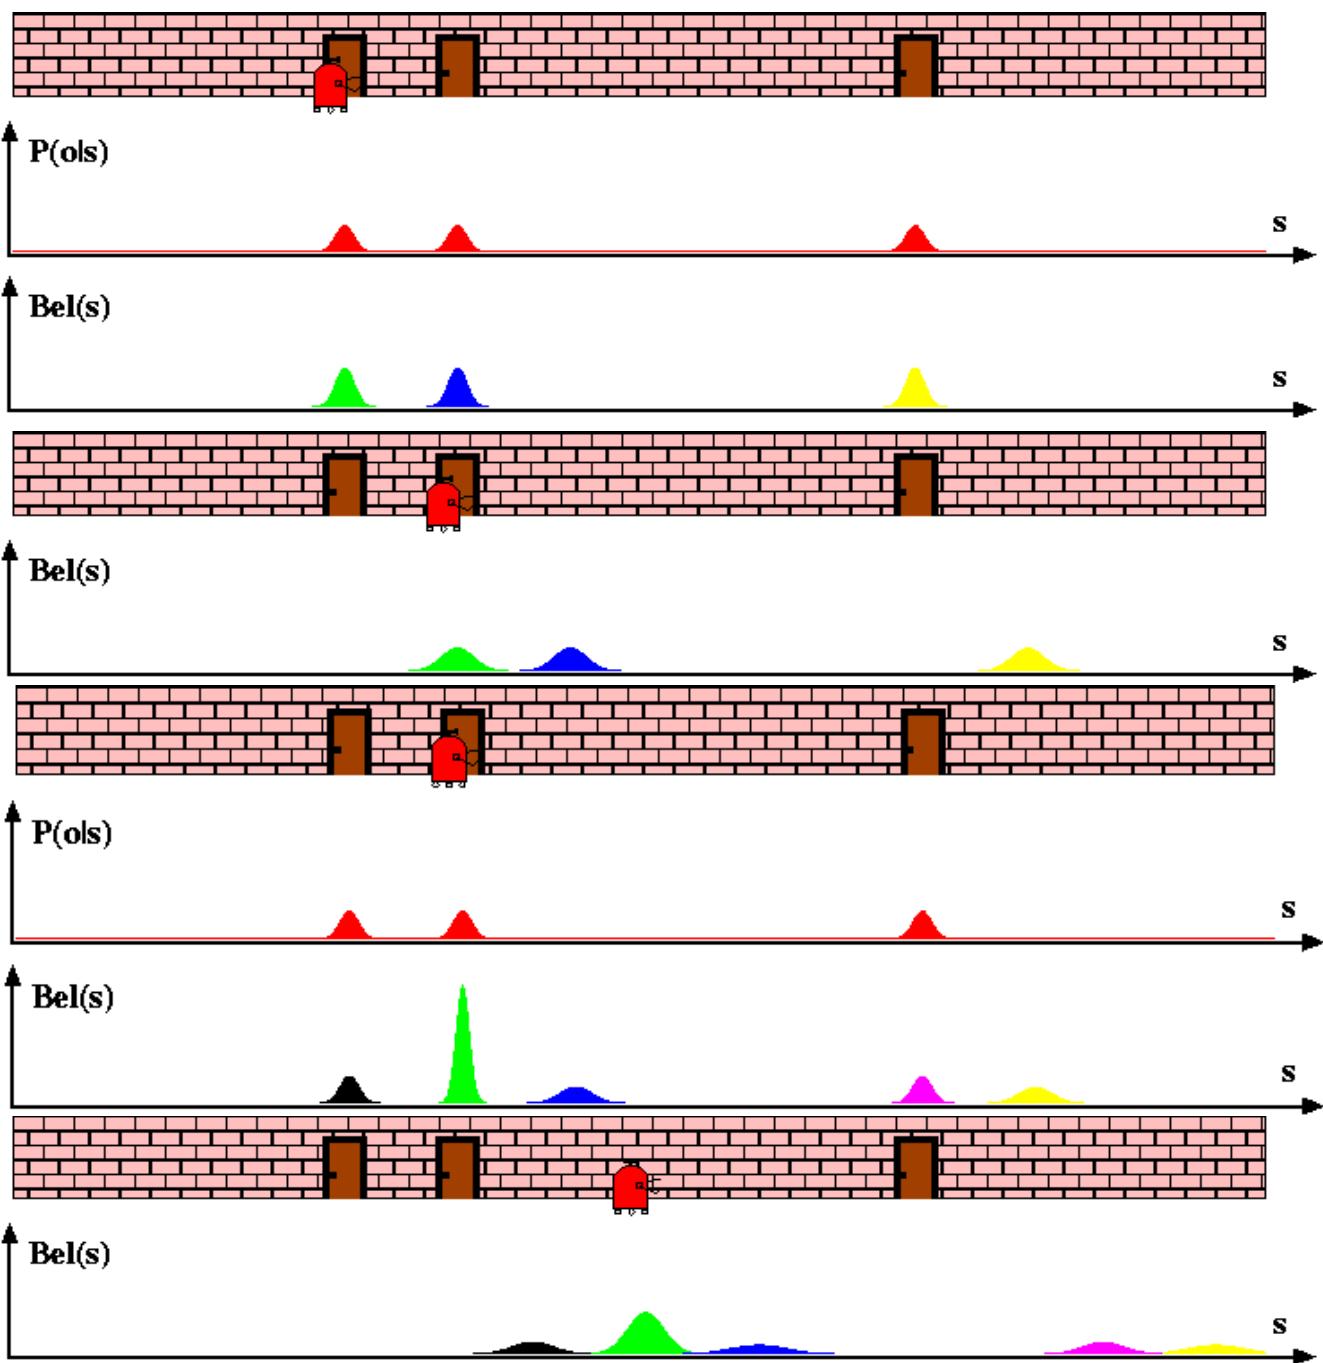

# Localization With MHT

- Belief is represented by multiple hypotheses
- Each hypothesis is tracked by a Kalman filter
- **Additional problems:**
  - Data association: Which observation corresponds to which hypothesis?
  - Hypothesis management: When to add / delete hypotheses?
  - Huge body of literature on target tracking, motion correspondence etc.

# MHT: Implemented System (1)

- Hypotheses are extracted from LRF scans
- Each hypothesis has probability of being the correct one:

$$H_i = \{\hat{x}_i, \Sigma_i, P(H_i)\}$$

- Hypothesis probability is computed using Bayes' rule

$$P(H_i | s) = \frac{P(s | H_i)P(H_i)}{P(s)}$$

- Hypotheses with low probability are deleted.
- New candidates are extracted from LRF scans.



$$C_j = \{z_j, R_j\}$$

[Jensfelt et al. '00]

# MHT: Implemented System (2)


Robot view

Pose candidates

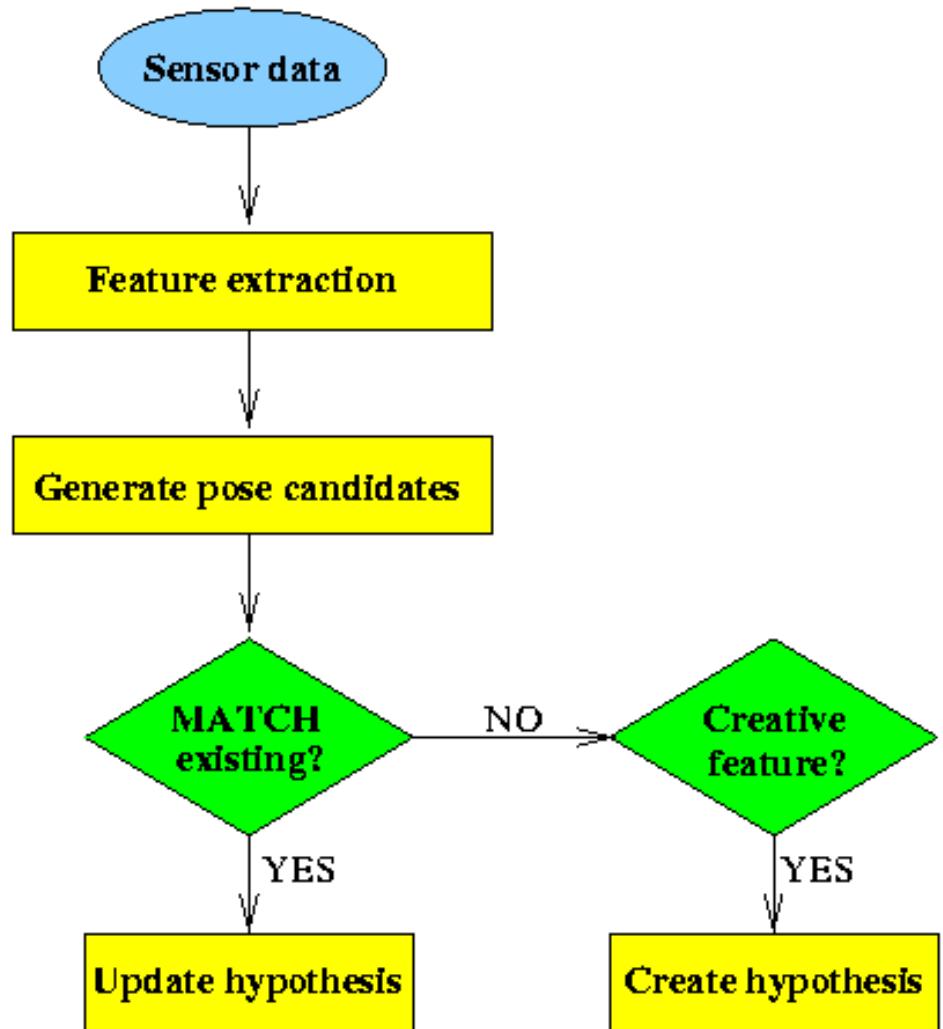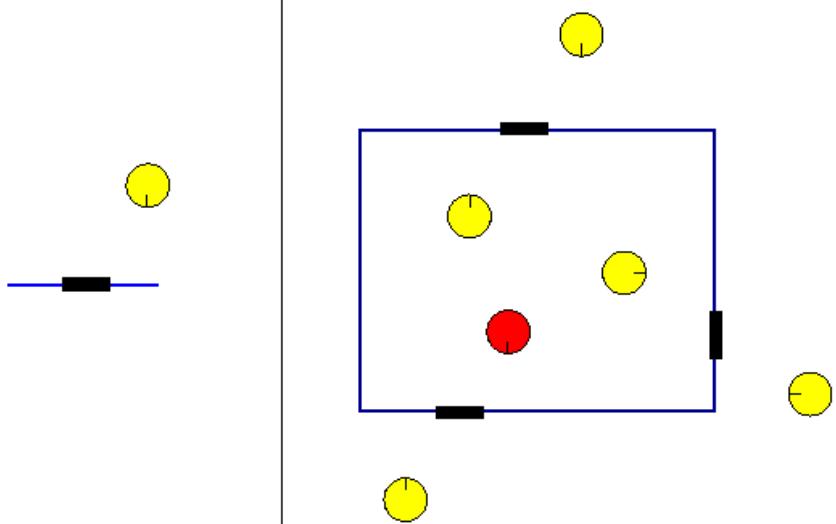


# MHT: Implemented System (3)

## Example run

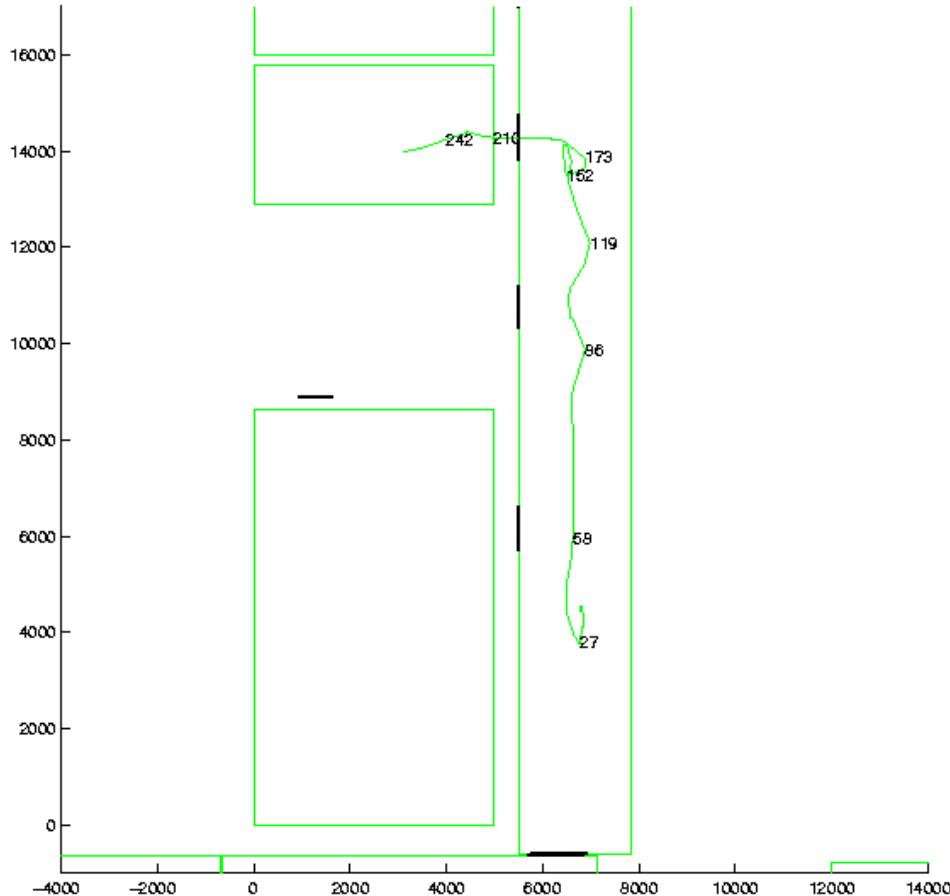

Map and trajectory

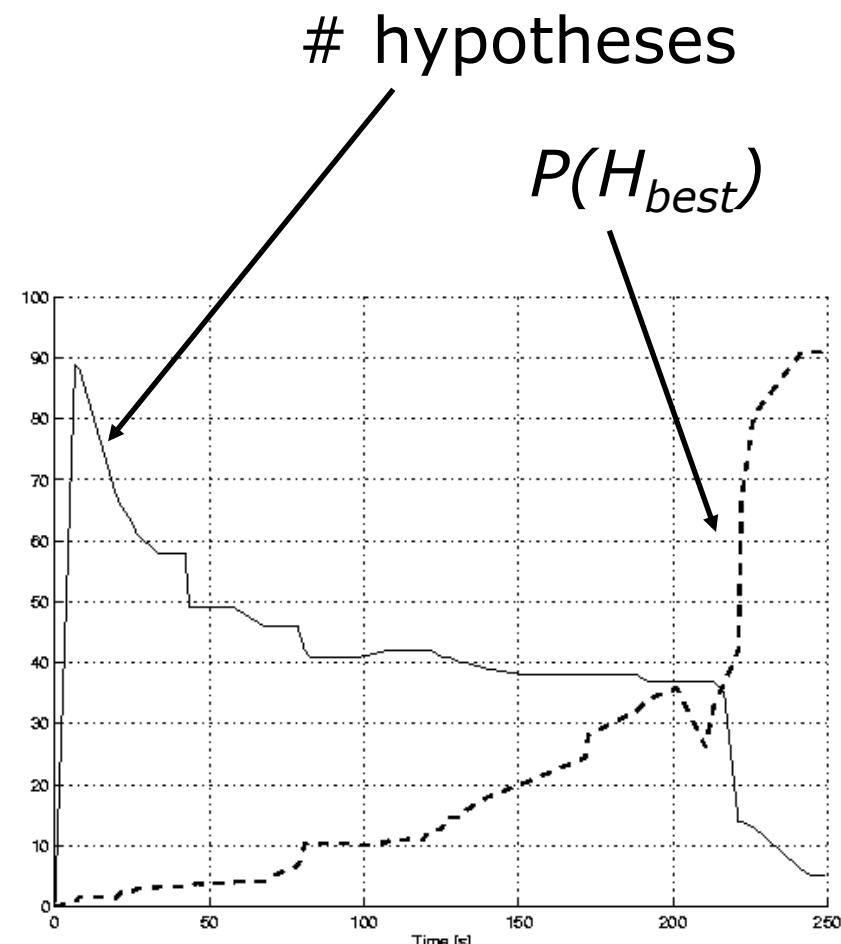

#hypotheses vs. time