

# Introduction

- What IS computer vision?

the analysis of digital images by a computer


- Where do images come from?

# Applications: Medical Imaging


CT image of a patient's abdomen




# Visible Man Slice Through Lung

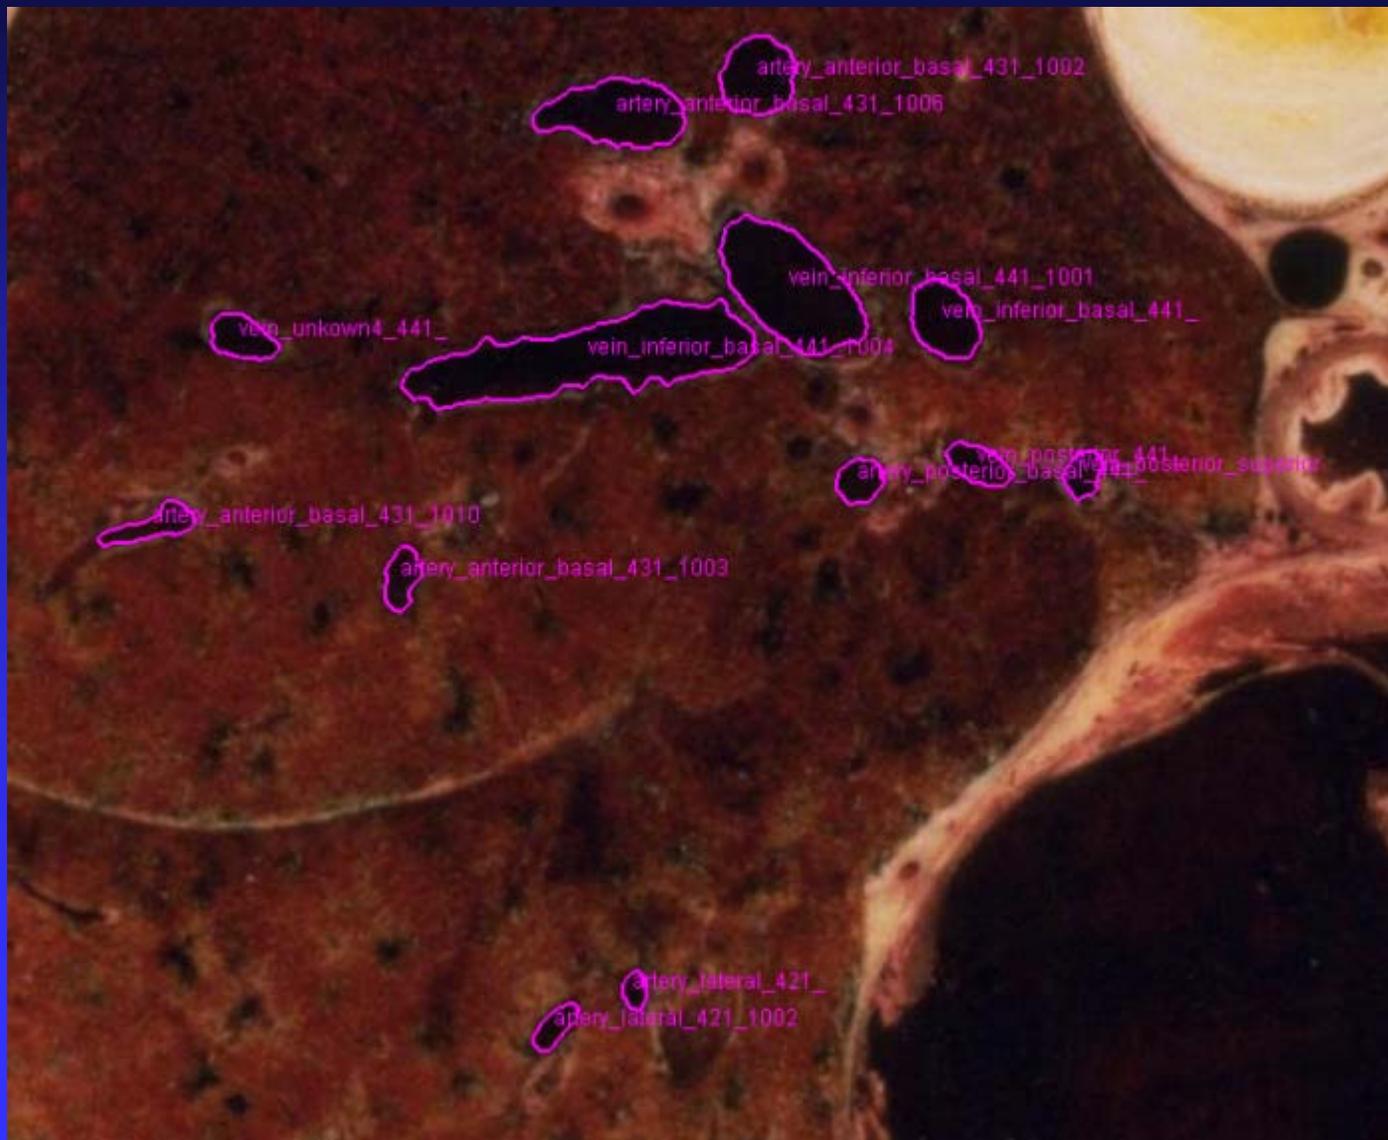



# 3D Reconstruction of the Blood Vessel Tree

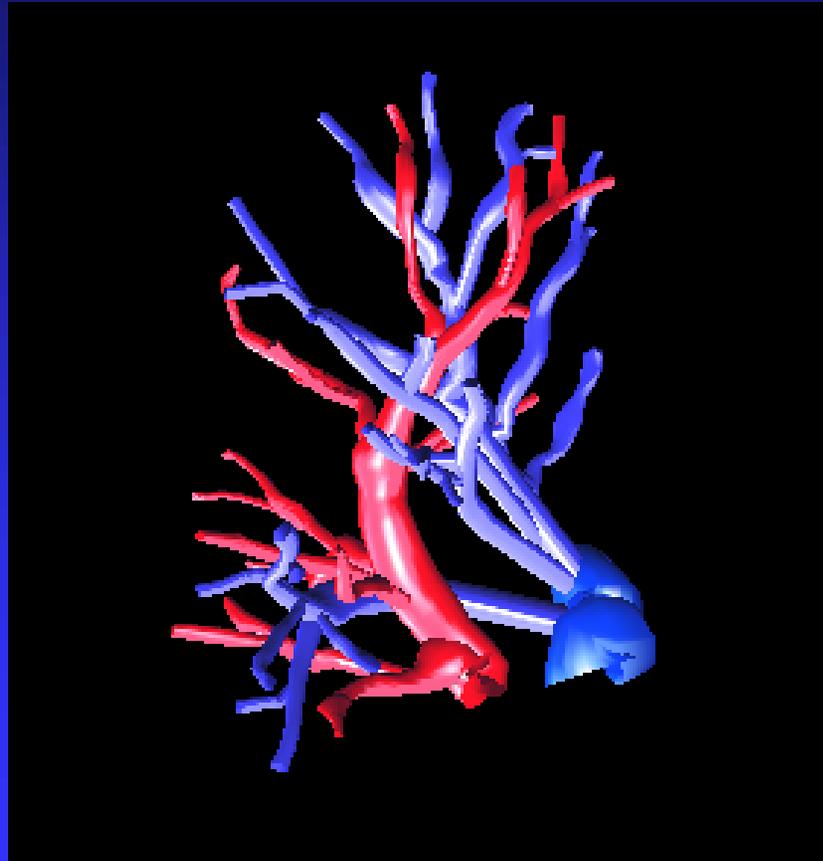

# Slice of a Chicken Embryo's Inner Ear

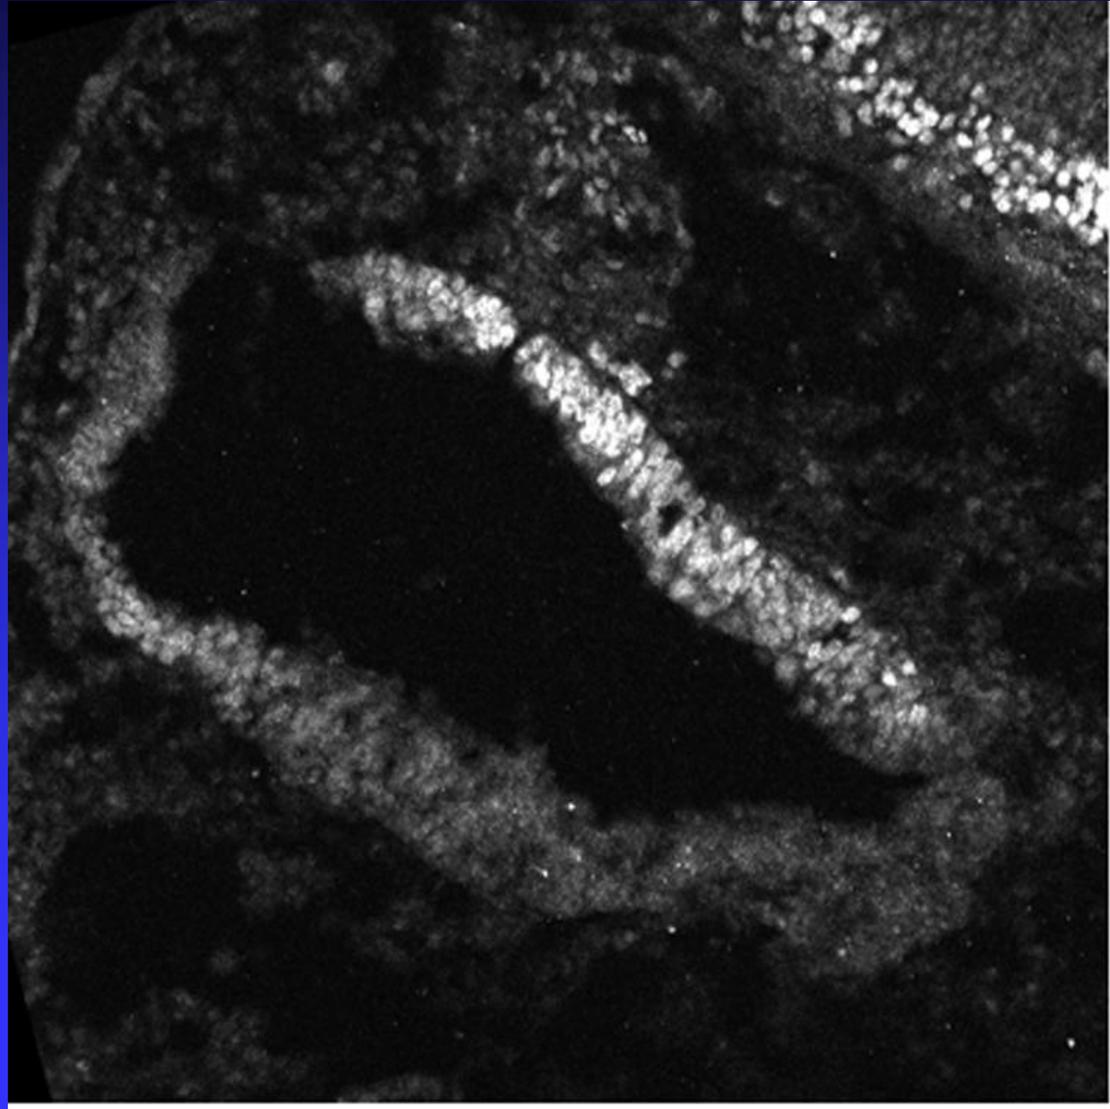

# CBIR of Mouse Eye Images for Genetic Studies

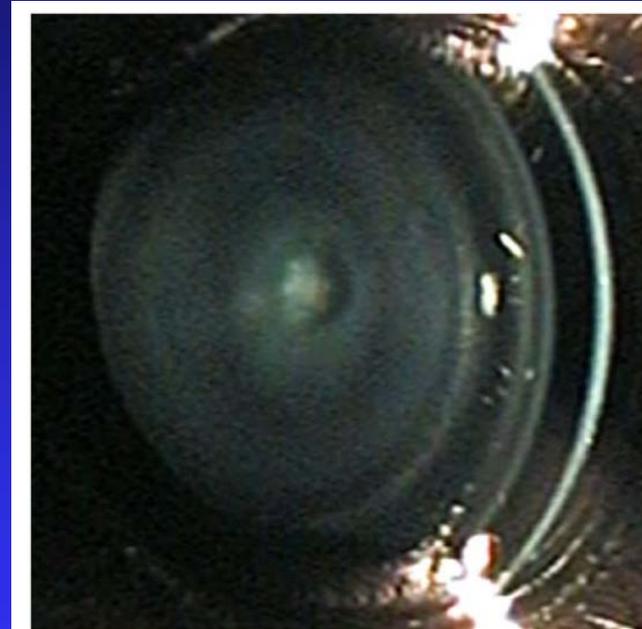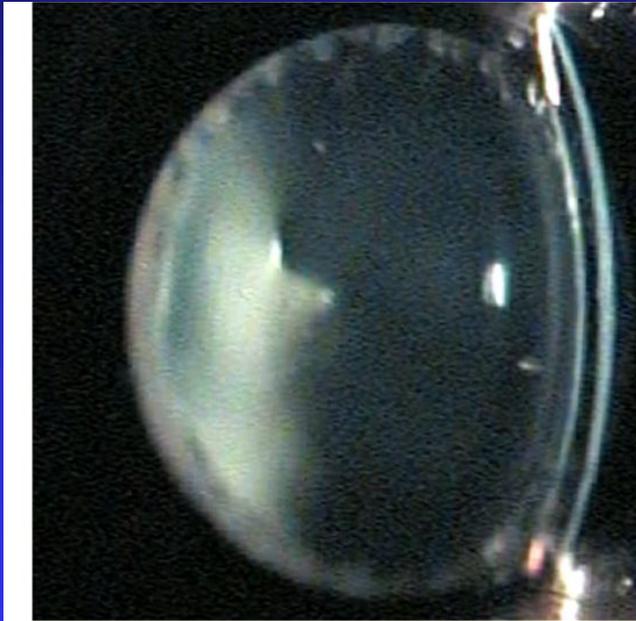

# Robotics


- 2D Gray-tone or Color Images

“Mars” rover




- 3D Range Images

What am I?

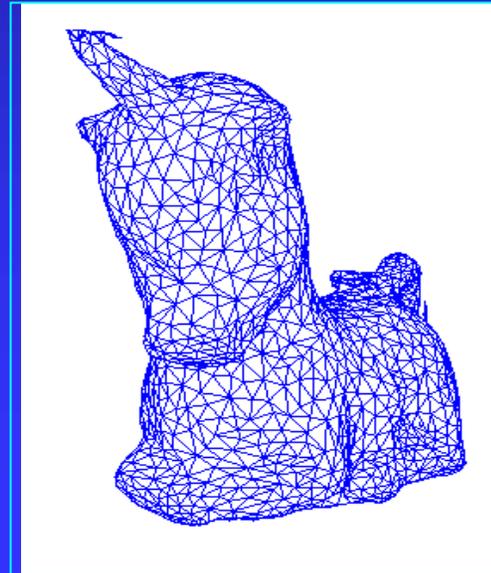

- Robot Soccer

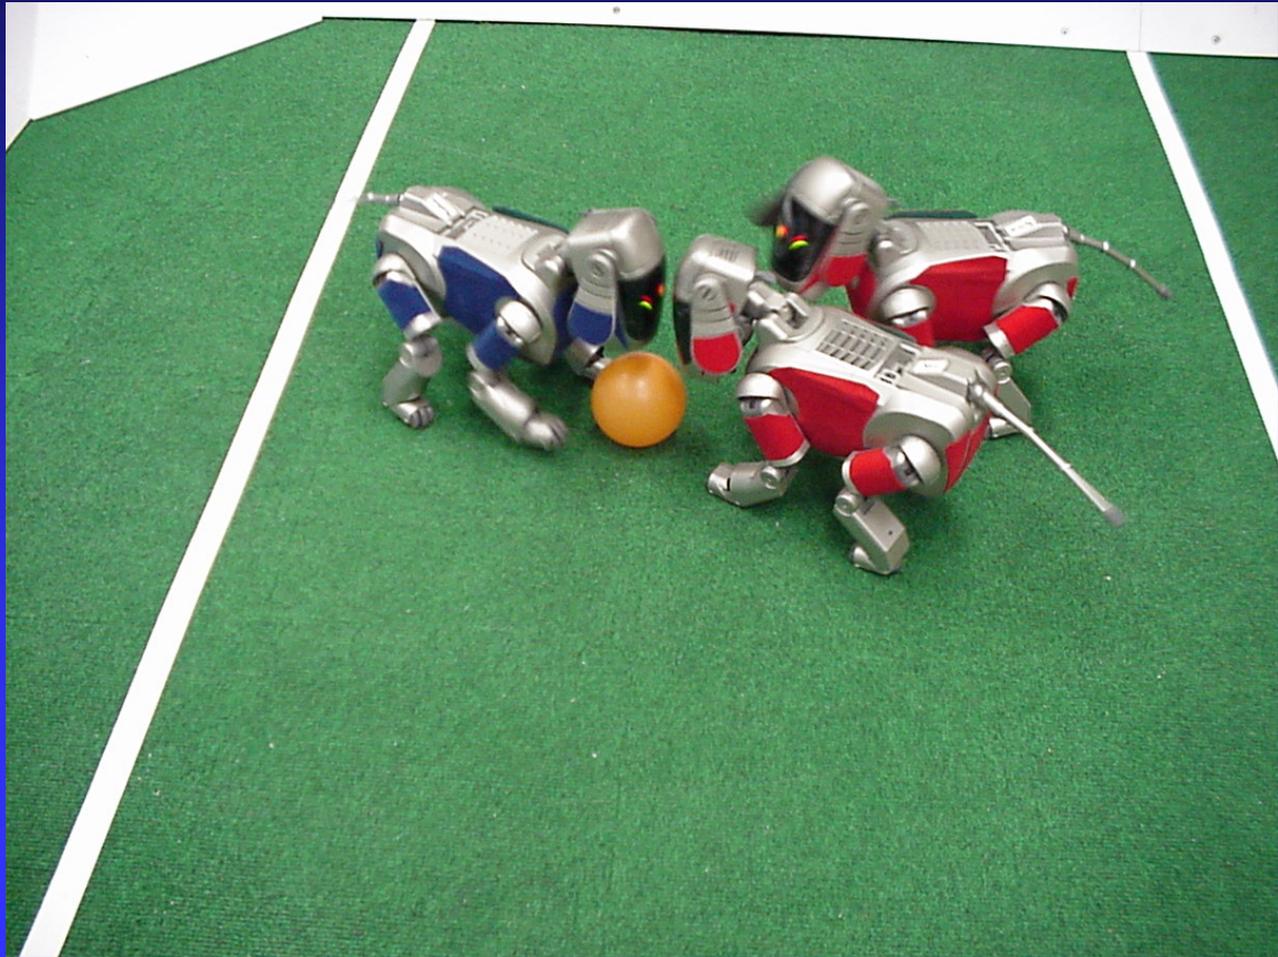

# Image Databases:

Images from my Ground-Truth collection:

<http://www.cs.washington.edu/research/imagedatabase/groundtruth>



- retrieve images containing trees

# Some Features for Image Retrieval


Original Images






Color Regions




Texture Regions

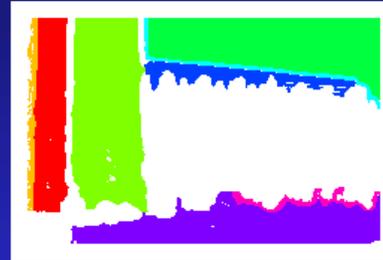


Line Clusters

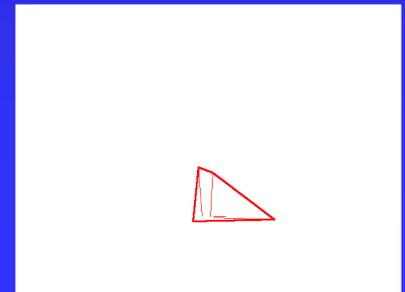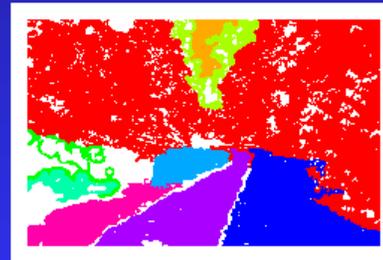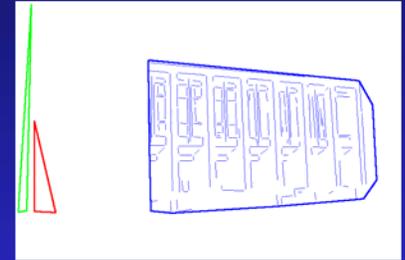

# Documents:

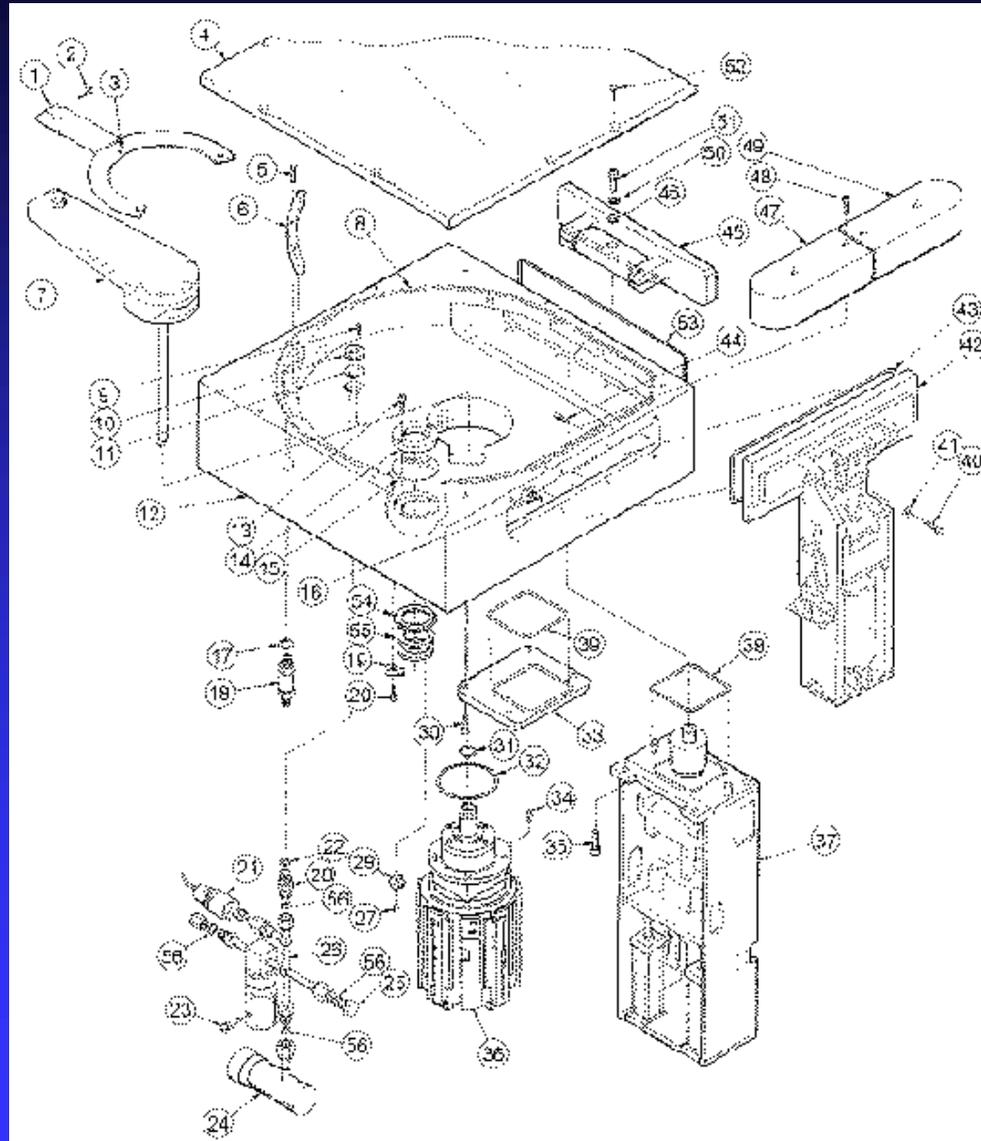

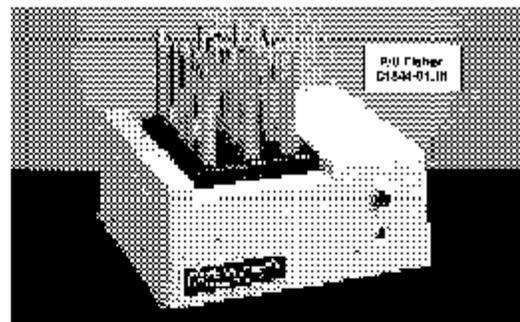

**Model 145 Isotemp® Dry Bath Incubator**

**Holds 1 to 4 heating blocks with choice of 11 well sizes**  
**Maintains every sample in within  $\pm 1^{\circ}$  C of temperature**

Unique sample wells are shaped so that 2 or more blocks deliver same amount of heat to all parts of the sample tube. No temperature gradient either up or down the bottom or top of the tube that may invalidate tests in tubes with drilled cylindrical wells. Sample tubes rest on insulating plugs to prevent localized heating. A low cost stainless steel temperature probe is built into the heat distribution plate in the front of the bath. Plate is 2.5 mm thick (9.5 mm). Dry bath maintains cleaner problems because tubes dry quickly.

Ambient to 125°C (255°F) with  $\pm 1^{\circ}$  C control. Dial temperature controlled used from 25° to 55° C. Ideal for enzyme reactions, inoculation of sera, Bb studies, cross-matching and Rh system determinations. (Dimensions: 8.1 x 15.9 x 4" H, 125 x 28 x 11 cm). With top cover and plug. Heating blocks sold separately (see lower right).

Electrical Requirements	Cat. No.	Each
200V, 60/50 Hz, 300W/250 approved	11-715-100	419.33
230V, 50/60 Hz, 800W	11-715-101	556.33

Overage order for manual 3" x 5" Performance Model

**Model 147 Isotemp® Dry Bath**

**Holds single heating block with choice of 11 well sizes**

Similar to Model 145, but with 30" thick (2.0 mm) plate. Ideal for labs with smaller volumes of enzyme and coagulation assays, Rh studies, and dry incubators. Forward bias-adjusted temperature control between ambient and 85°C (203°F). Observe thermometer panel to use set sample temperature, adjust control through hole in top panel. Maintains set temperature with consistency and uniformity  $\pm 1.0^{\circ}$  C.

Supplier with strong nylon case, thermistorally controlled heater, and indicator amp. See case and plug and instructions. Dimensions: 8.1 x 6.5 x 3" H, 11.5 x 17 x 8 cm. CSA approved. Heating blocks sold separately (see below).

Electrical Requirements	Cat. No.	Each
120V 50/60 Hz, 120W	11-715-102	223.58

**Interchangeable Heating Blocks for Isotemp® Dry Baths**

For Models 145 and 147 Dry Baths. Composed of black anodized aluminum alloy. Chemical resistant. Dimensions: 2.1 x 0.6 x 1.2" H (5.3 x 1.5 x 3.0 cm).


The 11-715-123 block provides a safe dry bath alternative for warming the Spalte of Essiee forceps. Avoids hazardous use of burners around flammable biologicals, solvents.



The 11-715-120 block is specifically designed to hold twenty 9.5 mm Bertho Diagnostics Phlebotomy pregnancy test tubes. This special shallow well block is similar to the other block with 0.6 mm wells, but sample wells are only 1.0 mm deep (1.0 cm) to meet test requirements. Wells in all other blocks are 1.4" deep (3.4 cm).

Tube Size, mm	Wells/Block	Cat. No.	Each
8	35	11-715-105	71.38
10	20	11-715-107	71.38
15	20 (see below)	11-715-120	71.38
12	12	11-715-108	71.38
12.5	12	11-715-121	71.38
13	12	11-715-111	71.38
15	12	11-715-113	71.38
16	8	11-715-122	71.38
18	12	11-715-115	71.38
21	6	11-715-117	71.38
25	6	11-715-119	71.38

Customize order. Forward to CMS/Fisher HealthCare, 10000...



**Incu-Block® Partial Immersion Thermometers**

For all standard bath, ice blocks and water baths. Critical temperatures (25°, 30°, 37°, 56° C) are marked with arrows. Available with stainless steel, contamination proof Teflon® coating. Total length: 1.75 mm. In inches: 0.5 mm.

Range, °C	Dial, °C	Teflon Coated	Cat. No.	Each
25-57	0-50	Yes	14-982	45.45
25-57	0-50	No	14-983	45.45

**More Thermometers**

For more thermometers, including digital types,

see page 952

# Science



## Classification Results:


Classified	as Cal	as Yor
Cal	171	16
Yor	0	99

Classified	as Cal	as Dor
Cal	114	72
Dor	70	133

# Surveillance: Event Recognition in Aerial Videos



Original Video Frame

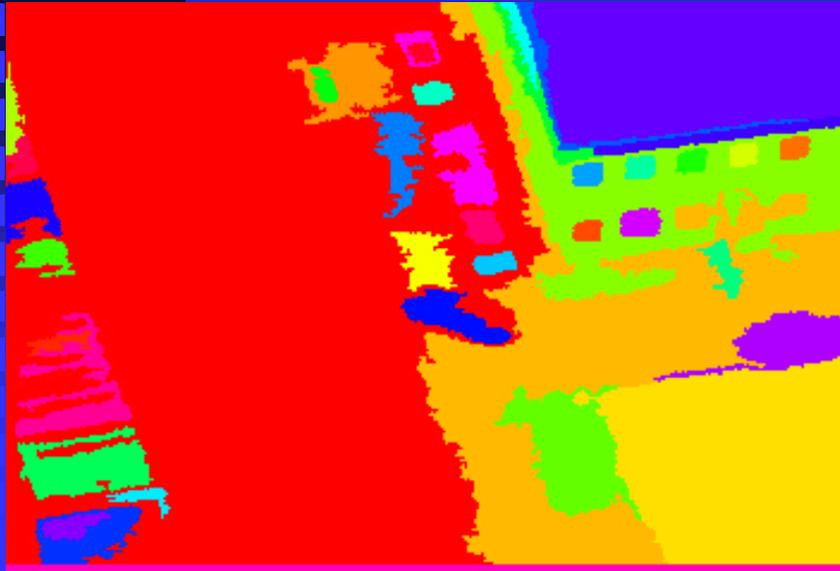


Color Regions



Structure Regions

# Face Detection (and Recognition)

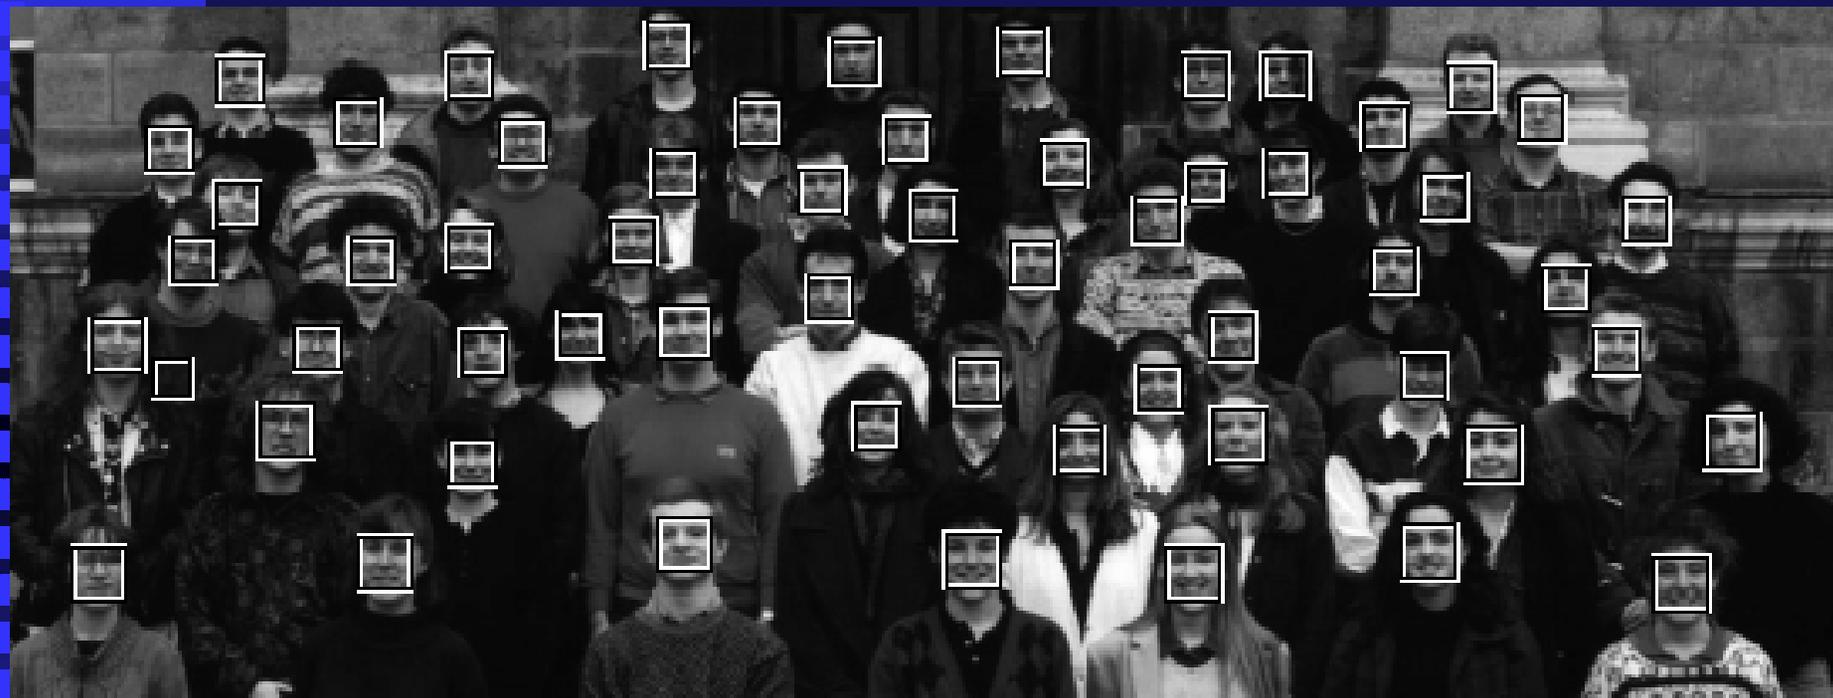


## Graphics: Special Effects



Andy Serkis, Gollum, Lord of the Rings

# 3D Reconstruction and Graphics Viewer

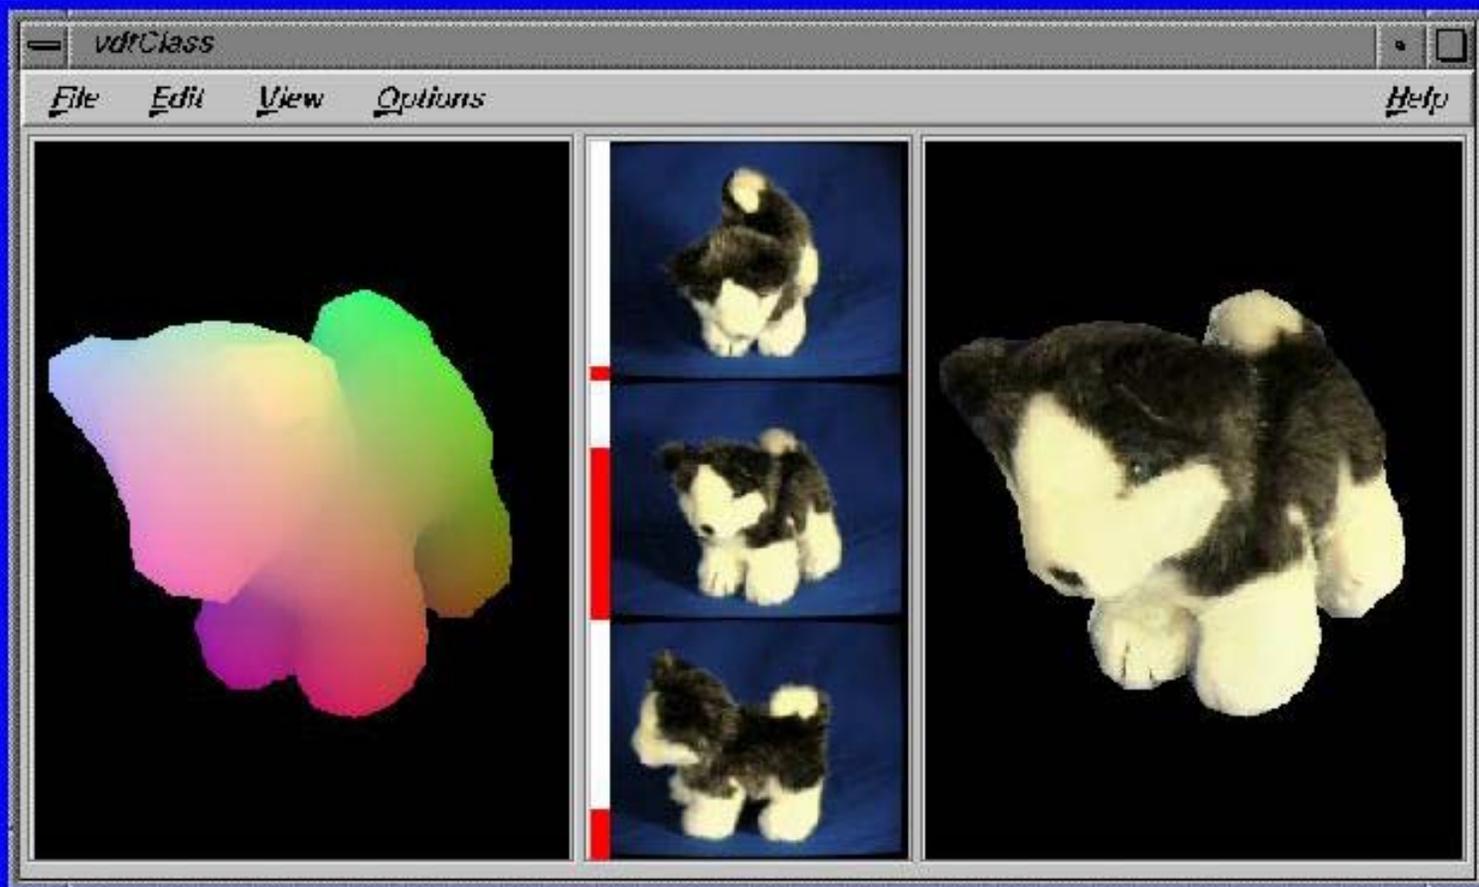

# Object Recognition from "Parts"

Part 1 – Det:5e-18




Part 2 – Det:8e-22



Part 3 – Det:6e-18



Part 4 – Det:1e-19

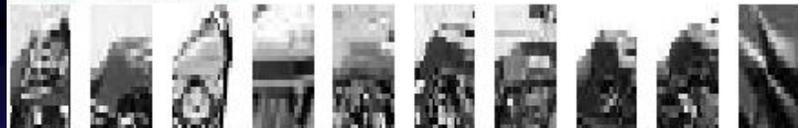

Part 5 – Det:3e-17



Part 6 – Det:4e-24



Background – Det:5e-19

