
Announcements

- Mailing list
- Project 1
 - test the turnin procedure *this week* (make sure it works)
- · vote on best artifacts in next week's class
- Project 2 groups
 - · next week signup for panorama kits
 - find group of 3-4 people

Projection



Readings

- Nalwa 2.1
- (supplemental): Forsyth Chaps 1-2


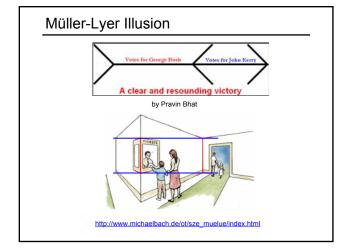



Image formation



Let's design a camera

- Idea 1: put a piece of film in front of an object
- · Do we get a reasonable image?


Pinhole camera




Add a barrier to block off most of the rays


- · This reduces blurring
- · The opening known as the aperture
- · How does this transform the image?

Camera Obscura The first camera • Known to Aristotle • How does the aperture size affect the image?

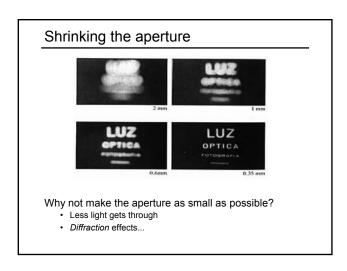

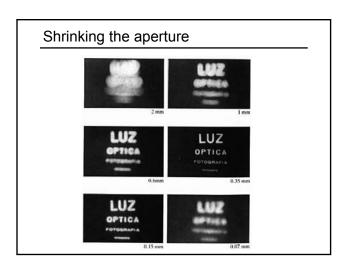


Adding a lens



A lens focuses light onto the film

- There is a specific distance at which objects are "in focus"
 - other points project to a "circle of confusion" in the image
- · Changing the shape of the lens changes this distance


Lenses



A lens focuses parallel rays onto a single focal point

- focal point at a distance f beyond the plane of the lens
 - $-\ f$ is a function of the shape and index of refraction of the lens
- Aperture of diameter D restricts the range of rays
 - aperture may be on either side of the lens
- Lenses are typically spherical (easier to produce)


Thin lenses



Thin lens equation:

- Any object point satisfying this equation is in focus What is the shape of the focus region?
- How can we change the focus region?
- Thin lens applet: http://www.phy.ntnu.edu.tw/java/Lens/lens_e.html (by Fu-Kwun Hwang)


Depth of field



Changing the aperture size affects depth of field

· A smaller aperture increases the range in which the object is approximately in focus

The eye



The human eye is a camera

- Iris colored annulus with radial muscles
- Pupil the hole (aperture) whose size is controlled by the iris
- · What's the "film"?
 - photoreceptor cells (rods and cones) in the retina


Digital camera



A digital camera replaces film with a sensor array

- Each cell in the array is a Charge Coupled Device
 - light-sensitive diode that converts photons to electrons
 - other variants exist: CMOS is becoming more popular
 - http://electronics.howstuffworks.com/digital-camera.htm


Modeling projection



The coordinate system

- We will use the pin-hole model as an approximation
- Put the optical center (Center Of Projection) at the origin
- Put the image plane (Projection Plane) in front of the COP
- · The camera looks down the negative z axis
 - we need this if we want right-handed-coordinates

Modeling projection



Projection equations

- Compute intersection with PP of ray from (x,y,z) to COP
- Derived using similar triangles (on board)

$$(x,y,z) \to (-d\frac{x}{z}, -d\frac{y}{z}, -d)$$
 • We get the projection by throwing out the last coordinate:
$$(x,y,z) \to (-d\frac{x}{z}, -d\frac{y}{z})$$

$$(x, y, z) \rightarrow (-d\frac{x}{z}, -d\frac{y}{z})$$

Homogeneous coordinates

Is this a linear transformation?

· no-division by z is nonlinear

Trick: add one more coordinate:

$$(x,y) \Rightarrow \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

$$(x, y, z) \Rightarrow \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

homogeneous image coordinates

homogeneous scene coordinates

Converting from homogeneous coordinates

$$\begin{bmatrix} x \\ y \\ w \end{bmatrix} \Rightarrow (x/w, y/w) \qquad \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix} \Rightarrow (x/w, y/w, z/w)$$

Perspective Projection

Projection is a matrix multiply using homogeneous coordinates:

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & -1/d & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ -z/d \end{bmatrix} \Rightarrow (-d\frac{x}{z}, -d\frac{y}{z})$$

divide by third coordinate

This is known as perspective projection

- The matrix is the projection matrix
- · Can also formulate as a 4x4 (today's reading does this)

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & -1/d & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ z \\ -z/d \end{bmatrix} \Rightarrow (-d\frac{x}{z}, -d\frac{y}{z})$$
 divide by fourth coordinate

Perspective Projection

How does scaling the projection matrix change the transformation?


$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & -1/d & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ -z/d \end{bmatrix} \Rightarrow (-d\frac{x}{z}, -d\frac{y}{z})$$

$$\begin{bmatrix} -d & 0 & 0 & 0 \\ 0 & -d & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} -dx \\ -dy \\ z \end{bmatrix} \Rightarrow (-d\frac{x}{z}, -d\frac{y}{z})$$

Orthographic projection

Special case of perspective projection

· Distance from the COP to the PP is infinite



- Also called "parallel projection": $(x, y, z) \rightarrow (x, y)$
- · What's the projection matrix?

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ 1 \end{bmatrix} \Rightarrow (x, y)$$

Other types of projection

Scaled orthographic

· Also called "weak perspective"

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1/d \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ 1/d \end{bmatrix} \Rightarrow (dx, dy)$$

Affine projection

· Also called "paraperspective"

$$\left[\begin{array}{cccc} a & b & c & d \\ e & f & g & h \\ 0 & 0 & 0 & 1 \end{array}\right] \left[\begin{array}{c} x \\ y \\ z \\ 1 \end{array}\right]$$

Camera parameters

A camera is described by several parameters

- Translation T of the optical center from the origin of world coords
- Rotation R of the image plane
- focal length f, principle point (x'_c, y'_c) , pixel size (s_x, s_y)
- blue parameters are called "extrinsics," red are "intrinsics"

Projection equation



- The projection matrix models the cumulative effect of all parameters
- Useful to decompose into a series of operations


identity matrix

$$\boldsymbol{\Pi} = \begin{bmatrix} -fs_{x} & 0 & x'_{e} \\ 0 & -fs_{y} & y'_{e} \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} \boldsymbol{R}_{3x3} & \boldsymbol{\theta}_{3x1} \end{bmatrix} \begin{bmatrix} \boldsymbol{f}_{3x3} & \boldsymbol{T}_{3x1} \\ \boldsymbol{\theta}_{1x3} & 1 \end{bmatrix}$$

$$\begin{array}{c} \boldsymbol{I} \\ \boldsymbol{\theta}_{1x3} \\ \boldsymbol{\theta}$$

- The definitions of these parameters are **not** completely standardized
 - especially intrinsics-varies from one book to another

Distortion



Radial distortion of the image


- · Caused by imperfect lenses
- Deviations are most noticeable for rays that pass through the edge of the lens

Correcting radial distortion





from Helmut Dersch

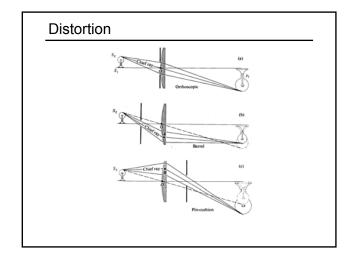

Modeling distortion

$$\begin{array}{lll} \text{Project } (\bar{x}, \bar{y}, \bar{z}) & x_n' & = & \hat{x}/\hat{z} \\ \text{to "normalized"} & y_n' & = & \hat{y}/\hat{z} \end{array}$$

$$r^2 = x_n'^2 + y_n'^2$$

$$\begin{array}{rcl} r^2 &=& {x_n'}^2 + {y_n'}^2 \\ \text{Apply radial distortion} && x_d' &=& x_n'(1+\kappa_1 r^2 + \kappa_2 r^4) \\ && y_d' &=& y_n'(1+\kappa_1 r^2 + \kappa_2 r^4) \end{array}$$

$$y'_d = y'_n (1 + \kappa_1 r^2 + \kappa_2 r^4)$$

Apply focal length translate image center
$$\begin{array}{cccc} x' &=& fx_d' + x_c \\ &y' &=& fy_d' + y_c \end{array}$$

To model lens distortion

Use above projection operation instead of standard projection matrix multiplication