


### Sampling and the Nyquist rate




Aliasing can arise when you sample a continuous signal or image

- occurs when your sampling rate is not high enough to capture the amount of detail in your image
- Can give you the wrong signal/image—an alias
- · formally, the image contains structure at different scales
  - called "frequencies" in the Fourier domain
- the sampling rate must be high enough to capture the highest frequency in the image

#### To avoid aliasing:

- sampling rate ≥ 2 \* max frequency in the image
  - said another way: ≥ two samples per cycle
- · This minimum sampling rate is called the Nyquist rate

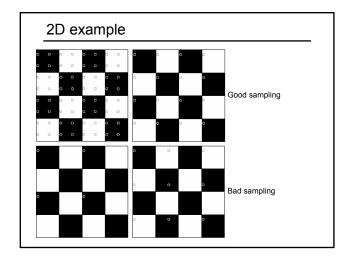

## Subsampling with Gaussian pre-filtering









G 1/4

Gaussian 1/2

Solution: filter the image, then subsample


• Filter size should double for each ½ size reduction. Why?

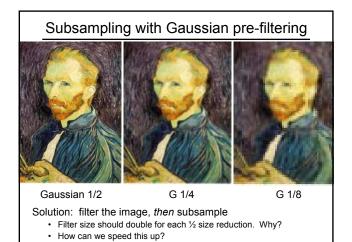

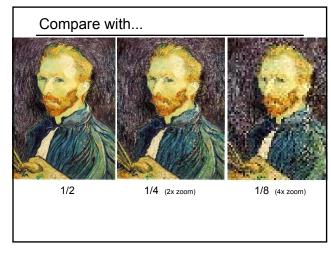




Moire patterns in real-world images. Here are comparison images by Dave Etchells of <u>Imaging Resource</u> using the Canon D60 (with an antialias filter) and the Sigma SD-9 (which has no antialias filter). The bands below the fur in the image at right are the kinds of artifacts that appear in images when no antialias filter is used. Sigma chose to eliminate the filter to get more sharpness, but the resulting apparent detail may or may not reflect features in the image.

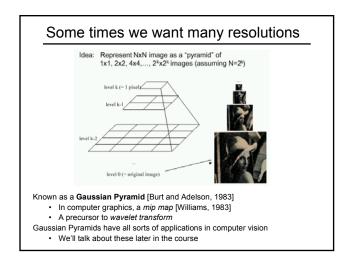

### Gaussian pyramid construction



#### Repeat

- Filter
- Subsample

Until minimum resolution reached


· can specify desired number of levels (e.g., 3-level pyramid)

The whole pyramid is only 4/3 the size of the original image!

#### Image resampling

So far, we considered only power-of-two subsampling

- · What about arbitrary scale reduction?
- · How can we increase the size of the image?



d = 1 in this example

#### Recall how a digital image is formed

$$F[x, y] = quantize\{f(xd, yd)\}$$

- · It is a discrete point-sampling of a continuous function
- If we could somehow reconstruct the original function, any new image could be generated, at any resolution and scale

### Image resampling

So far, we considered only power-of-two subsampling

- · What about arbitrary scale reduction?
- · How can we increase the size of the image?



d = 1 in this example

Recall how a digital image is formed

$$F[x, y] = quantize\{f(xd, yd)\}$$

- · It is a discrete point-sampling of a continuous function
- If we could somehow reconstruct the original function, any new image could be generated, at any resolution and scale

# Image resampling

So what to do if we don't know f

- Answer: guess an approximation  $\bar{f}$
- · Can be done in a principled way: filtering




Image reconstruction

Convert F to a continuous function


 $f_F(x) = F(\frac{x}{d})$  when  $\frac{x}{d}$  is an integer, 0 otherwise

Reconstruct by cross-correlation:

$$\tilde{f} = h \otimes f_F$$

## Resampling filters

What does the 2D version of this hat function look like?



#### Better filters give better resampled images

- · Bicubic is common choice
  - fit 3<sup>rd</sup> degree polynomial surface to pixels in neighborhood
  - can also be implemented by a convolution

### Bilinear interpolation

A simple method for resampling images

$$(i,j+1) \qquad \qquad (i+1,j+1)$$

$$(x,y) \qquad \qquad a$$

$$(i,j) \qquad \qquad (i+1,j)$$

$$\begin{split} f(x,y) = & \ (1-a)(1-b) \ f[i,j] \\ & + a(1-b) \ f[i+1,j] \\ & + ab \ f[i+1,j+1] \\ & + (1-a)b \ f[i,j+1] \end{split}$$

## Things to take away from this lecture

Things to take away from image processing lecture

- An image as a function
- Digital vs. continuous images
- Image transformation: range vs. domain
- · Types of noise
- · LSI filters
  - cross-correlation and convolution
  - properties of LSI filters
  - mean, Gaussian, bilinear filters
- · Median filtering
- Image scaling
- Image resampling
- Aliasing
- Gaussian pyramids
- Bilinear interpolation