

Building Java Programs

Chapter 4

Lecture 4-2: Advanced `if/else`; Cumulative sum

reading: 4.2, 4.4 - 4.5

Logical operators

- Tests can be combined using *logical operators*:

Operator	Description	Example	Result
<code>&&</code>	and	<code>(2 == 3) && (-1 < 5)</code>	false
<code> </code>	or	<code>(2 == 3) (-1 < 5)</code>	true
<code>!</code>	not	<code>!(2 == 3)</code>	true

- "Truth tables" for each, used with logical values p and q :

p	q	p && q	p q
true	true	true	true
true	false	false	true
false	true	false	true
false	false	false	false

p	!p
true	false
false	true

Evaluating logical expressions

- Order of operations:

1. math
2. relational operators
3. logical operators

- Example:

```
5 * 7 >= 3 + 5 * (7 - 1) && 7 <= 11
5 * 7 >= 3 + 5 *       6      && 7 <= 11
35     >= 3 +      30          && 7 <= 11
35     >=      33          && 7 <= 11
true                      && true
                           true
```

- This can be hard to read. If you ever have an expression like this, consider adding more parentheses and storing intermediate results in variables.

Evaluating logical expressions

- Relational operators cannot be "chained" as in algebra

```
2 <= x <= 10
```

```
true <= 10
```

(assume that x is 15)

Error!

- Instead, combine multiple tests with `&&` or `||`

```
2 <= x && x <= 10
```

```
true && false
```

false

BOOLEAN HAIR LOGIC

A



B



AND



OR



XOR

Logical questions

- What is the result of each of the following expressions?

```
int x = 42;  
int y = 17;  
int z = 25;
```

- $y < x \&\& y \leq z$
- $x \% 2 == y \% 2 || x \% 2 == z \% 2$
- $x \leq y + z \&\& x \geq y + z$
- $! (x < y \&\& x < z)$
- $(x + y) \% 2 == 0 || ! ((z - y) \% 2 == 0)$

- Answers: true, false, true, true, false

- Exercise: Write a program that prompts for information about an apartment and uses it to decide whether to rent it.

Advanced if/else

reading: 4.4 - 4.5

Factoring if/else code

- **factoring:** Extracting common/redundant code.
 - Can reduce or eliminate redundancy from if/else code.
- Example:

```
if (a == 1) {  
    System.out.println(a);  
    x = 3;  
    b = b + x;  
} else if (a == 2) {  
    System.out.println(a);  
    x = 6;  
    y = y + 10;  
    b = b + x;  
} else { // a == 3  
    System.out.println(a);  
    x = 9;  
    b = b + x;  
}
```

```
System.out.println(a);  
x = 3 * a;  
if (a == 2) {  
    y = y + 10;  
}  
b = b + x;
```

The "dangling if" problem

- What can be improved about the following code?

```
if (x < 0) {  
    System.out.println("x is negative");  
} else if (x >= 0) {  
    System.out.println("x is non-negative");  
}
```

- The second if test is unnecessary and can be removed:

```
if (x < 0) {  
    System.out.println("x is negative");  
} else {  
    System.out.println("x is non-negative");  
}
```

if/else with return

```
// Returns the larger of the two given integers.  
public static int max(int a, int b) {  
    if (a > b) {  
        return a;  
    } else {  
        return b;  
    }  
}
```

- Methods can return different values using if/else
 - Returning a value causes a method to immediately exit.
 - All paths through the code must reach a `return` statement.

All paths must return

```
public static int max(int a, int b) {  
    if (a > b) {  
        return a;  
    }  
    // Error: not all paths return a value  
}
```


- The following also does not compile. Why not?

```
public static int max(int a, int b) {  
    if (a > b) {  
        return a;  
    } else if (b >= a) {  
        return b;  
    }  
}
```

- The compiler thinks if/else/if code can skip all paths, even though mathematically it must choose one or the other.
 - Solution here is to change else if to just else.

if/else, return question

- Write a method `quadrant` that accepts a pair of real numbers x and y and returns the quadrant for that point:

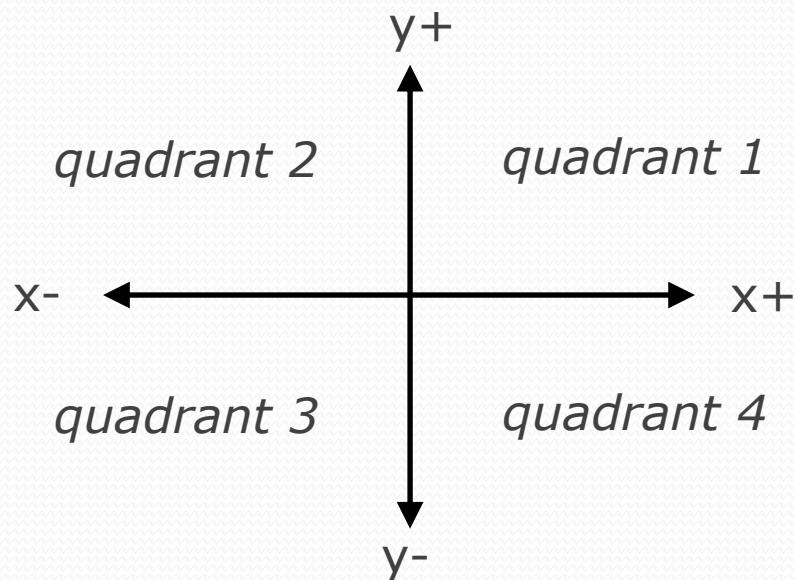

- Example: `quadrant(-4.2, 17.3)` returns 2
 - If the point falls directly on either axis, return 0.

if/else, return answer

```
public static int quadrant(double x, double y) {  
    if (x > 0 && y > 0) {  
        return 1;  
    } else if (x < 0 && y > 0) {  
        return 2;  
    } else if (x < 0 && y < 0) {  
        return 3;  
    } else if (x > 0 && y < 0) {  
        return 4;  
    } else {          // at least one coordinate equals 0  
        return 0;  
    }  
}
```

Cumulative algorithms

reading: 4.2

Adding many numbers

- How would you find the sum of all integers from 1-5?

```
int sum = 1 + 2 + 3 + 4 + 5;  
System.out.println("The sum is " + sum);
```

- What if we want the sum from 1 - 1,000?

Attempt at cumulative sum

- What is wrong with the following code?

```
for (int i = 1; i <= 1000; i++) {  
    int sum = 0;  
    sum += i;  
}  
System.out.println("The sum is " + sum);
```

Cumulative sum loop

```
int sum = 0;  
for (int i = 1; i <= 1000; i++) {  
    sum += i;  
}  
System.out.println("The sum is " + sum);
```

- **cumulative sum:** A variable that keeps a sum in progress and is updated repeatedly until summing is finished.
 - The `sum` in the above code represents a cumulative sum.
 - Cumulative sum variables must be declared *outside* the loops that update them, so that they will still exist after the loop.

Cumulative product

- This cumulative idea can be used with other operators:

```
int product = 1;  
for (int i = 1; i <= 20; i++) {  
    product = product * 2;  
}  
System.out.println("2 ^ 20 = " + product);
```

- How would we make the base and exponent adjustable?

Scanner and cumulative sum

- We can do a cumulative sum of user input:

```
Scanner console = new Scanner(System.in);  
int sum = 0;  
for (int i = 1; i <= 100; i++) {  
    System.out.print("Type a number: ");  
    sum = sum + console.nextInt();  
}  
System.out.println("The sum is " + sum);
```

Cumulative sum question

- Modify the Receipt program from Ch. 2.
 - Prompt for how many people, and each person's dinner cost.
 - Use static methods to structure the solution.
- Example log of execution:

How many people ate? 4

Person #1: How much did your dinner cost? 20.00

Person #2: How much did your dinner cost? 15

Person #3: How much did your dinner cost? 30.0

Person #4: How much did your dinner cost? 10.00

Subtotal: \$75.0

Tax: \$6.0

Tip: \$11.25

Total: \$92.25

Cumulative sum answer

```
// This program enhances our Receipt program using a cumulative sum.  
Import java.util.*;  
  
public class Receipt2 {  
    public static void main(String[] args) {  
        Scanner console = new Scanner(System.in);  
        int numPeople = getNumPeople(console);  
        double subtotal = getSubtotal(console, numPeople);  
        System.out.println();  
        results(subtotal);  
    }  
  
    // Prompts for number of people and returns total meal subtotal.  
    public static double getSubtotal(Scanner console, int numPeople) {  
        double subtotal = 0.0; // cumulative sum  
        for (int i = 1; i <= numPeople; i++) {  
            System.out.print("Person #" + i +  
                            ": How much did your dinner cost? ");  
            double personCost = console.nextDouble();  
            subtotal = subtotal + personCost; // add to sum  
        }  
        return subtotal;  
    }  
    ...
```

Cumulative answer, cont'd.

...

```
// Asks how many people are on this check.  
public static int getNumPeople(Scanner console) {  
    System.out.print("How many people ate? ");  
    return console.nextInt();  
  
}  
  
// Calculates total owed, assuming 8% tax and 15% tip  
public static void results(double subtotal) {  
    double tax = subtotal * .08;  
    double tip = subtotal * .15;  
    double total = subtotal + tax + tip;  
    System.out.println("Subtotal: $" + subtotal);  
    System.out.println("Tax: $" + tax);  
    System.out.println("Tip: $" + tip);  
    System.out.println("Total: $" + total);  
}
```

Putting it all together...

- Write a method `countFactors` that returns the number of factors of an integer.
 - `countFactors(24)` returns 8 because 1, 2, 3, 4, 6, 8, 12, and 24 are factors of 24.
- Solution:

```
// Returns how many factors the given number has.
public static int countFactors(int number) {
    int count = 0;
    for (int i = 1; i <= number; i++) {
        if (number % i == 0) {
            count++; // i is a factor of number
        }
    }
    return count;
}
```