

# Introduction to Computer Networks

## Overview of the Physical Layer




Computer Science & Engineering

UNIVERSITY *of* WASHINGTON


# Where we are in the Course

- Beginning to work our way up starting with the Physical layer

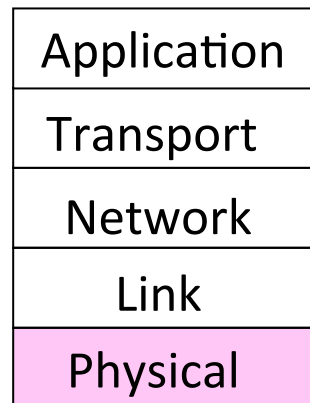

# Scope of the Physical Layer

- Concerns how signals are used to transfer message bits over a link
  - Wires etc. carry analog signals
  - We want to send digital bits

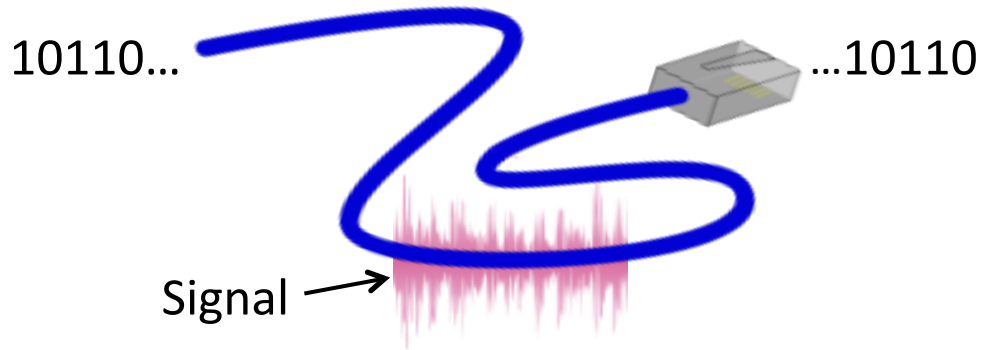


# Topics

1. Properties of media
  - Wires, fiber optics, wireless
2. Simple signal propagation
  - Bandwidth, attenuation, noise
3. Modulation schemes
  - Representing bits, noise
4. Fundamental limits
  - Nyquist, Shannon

# Simple Link Model

- We'll end with abstraction of a physical channel
  - Rate (or bandwidth, capacity, speed) in bits/second
  - Delay in seconds, related to length

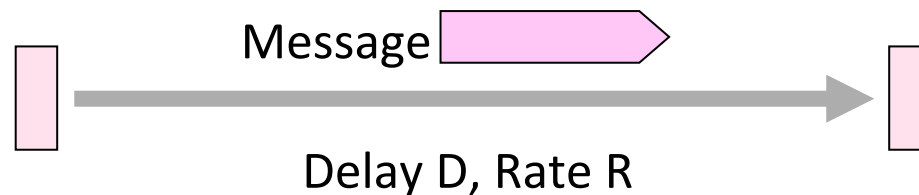

- Other important properties:
  - Whether the channel is broadcast, and its error rate

# Message Latency

- Latency is the delay to send a message over a link
  - Transmission delay: time to put M-bit message “on the wire”
  - Propagation delay: time for bits to propagate across the wire
  - Combining the two terms we have:

# Message Latency (2)

- Latency is the delay to send a message over a link
  - Transmission delay: time to put M-bit message “on the wire”  
$$T\text{-delay} = M \text{ (bits)} / \text{Rate (bits/sec)} = M/R \text{ seconds}$$
  - Propagation delay: time for bits to propagate across the wire  
$$P\text{-delay} = \text{Length} / \text{speed of signals} = L/\frac{2}{3}c = D \text{ seconds}$$
  - Combining the two terms we have: Latency =  $M/R + D$

# Metric Units

- The main prefixes we use:

<b>Prefix</b>	<b>Exp.</b>	<b>prefix</b>	<b>exp.</b>
K(ilo)	$10^3$	m(illi)	$10^{-3}$
M(ega)	$10^6$	$\mu$ (micro)	$10^{-6}$
G(iga)	$10^9$	n(ano)	$10^{-9}$

- Use powers of 10 for rates, 2 for storage
  - 1 Mbps = 1,000,000 bps, 1 KB = 1024 bytes
- “B” is for bytes, “b” is for bits



# Latency Examples


- “Dialup” with a telephone modem:
  - $D = 5\text{ms}$ ,  $R = 56\text{ kbps}$ ,  $M = 1250\text{ bytes}$
  
- Broadband cross-country link:
  - $D = 50\text{ms}$ ,  $R = 10\text{ Mbps}$ ,  $M = 1250\text{ bytes}$

## Latency Examples (2)

- “Dialup” with a telephone modem:  
D = 5ms, R = 56 kbps, M = 1250 bytes  
L = 5ms +  $(1250 \times 8) / (56 \times 10^3)$  sec = 184ms!
- Broadband cross-country link:  
D = 50ms, R = 10 Mbps, M = 1250 bytes  
L = 50ms +  $(1250 \times 8) / (10 \times 10^6)$  sec = 51ms
- A long link or a slow rate means high latency
  - Often, one delay component dominates

# Bandwidth-Delay Product


- Messages take space on the wire!



- The amount of data in flight is the bandwidth-delay (BD) product
  - Measure in bits, or in messages
  - Small for LANs, big for “long fat” pipes

# Bandwidth-Delay Example

- Fiber at home, cross-country  
R=40 Mbps, D=50ms  
BD =  $40 \times 50 \times 10^3$  bits  
= 250 KB
- That's quite a lot of data  
the network"!
- Question: What is the implication of a  
high BDP?

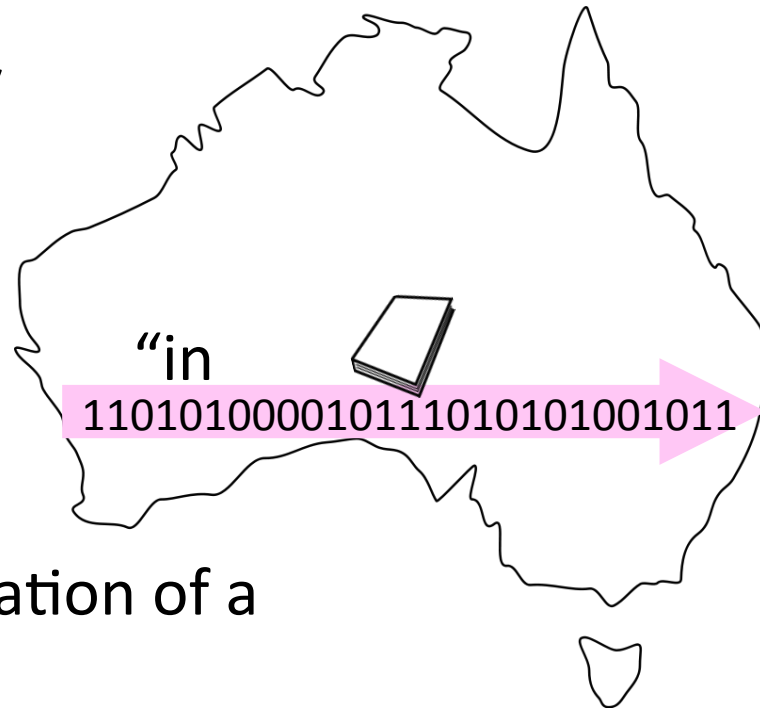

# Announcements

- Homework 1 due today
- Project 0 released today
  - Due in 11 days
- Focuses on socket programming
- Looking forward:
  - Project 1: HTTP proxy
  - Project Tor461: Implement Tor

# Project 0

- Use Datagrams (UDP) to implement the POP protocol
- Client-server programming
- Client sends:
  - Hello message
  - Data message(s) with sequence numbers
  - Closes connection
- Server:
  - Maintains state regarding the client
  - Sends response messages to received data

# Project 0

- Two programming styles:
  - Thread based programming
  - Event based single-thread programming
- Goal: provide an understanding of the different models


# Types of Media

- Media propagate signals that carry bits of information
- We'll look at some common types:
  - Wires »
  - Fiber (fiber optic cables) »
  - Wireless »




# Wires – Twisted Pair

- Very common; used in LANs and telephone lines
  - Twists reduce radiated signal

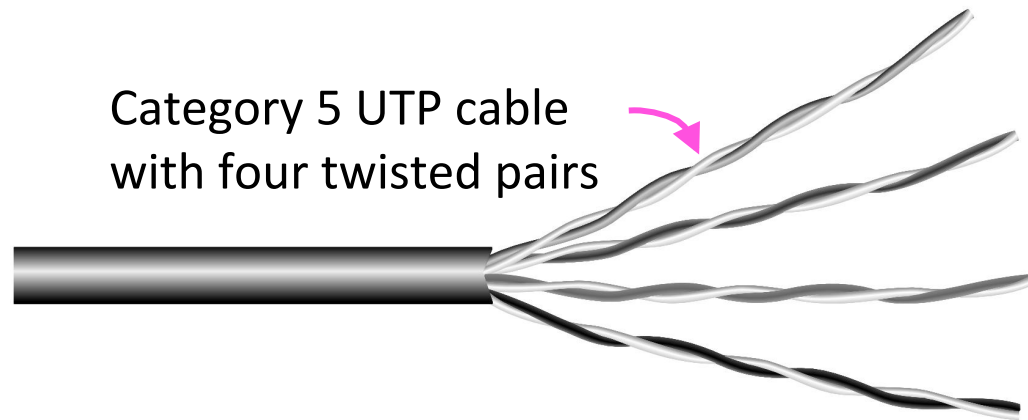

# Wires – Coaxial Cable


- Also common. Better shielding for better performance

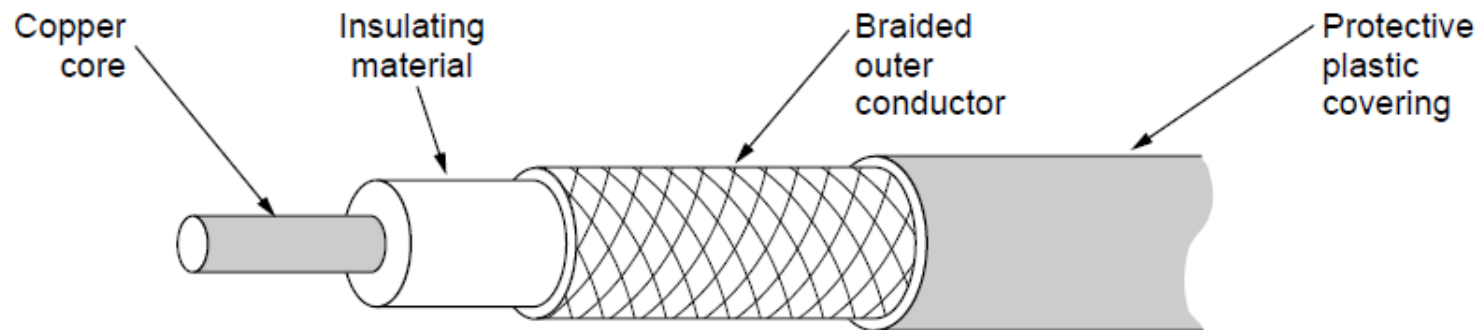

- Other kinds of wires too: e.g., electrical power



# Fiber

- Long, thin, pure strands of glass
  - Enormous bandwidth over long distances

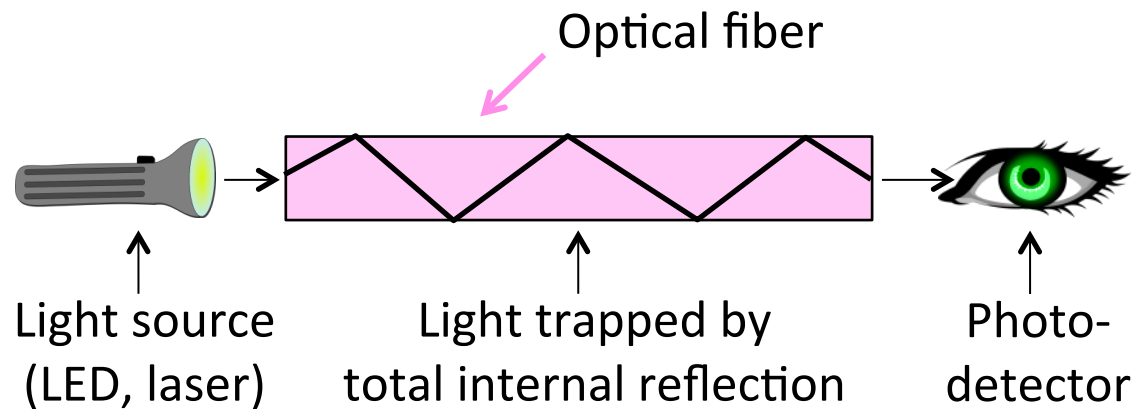


# Fiber (2)

- Two varieties: multi-mode (shorter links, cheaper) and single-mode (up to ~100 km)

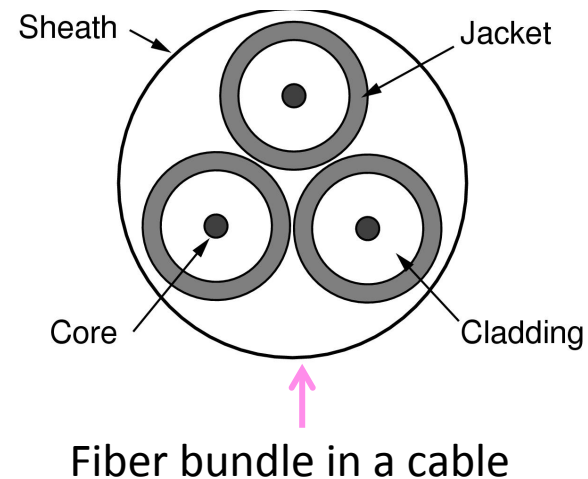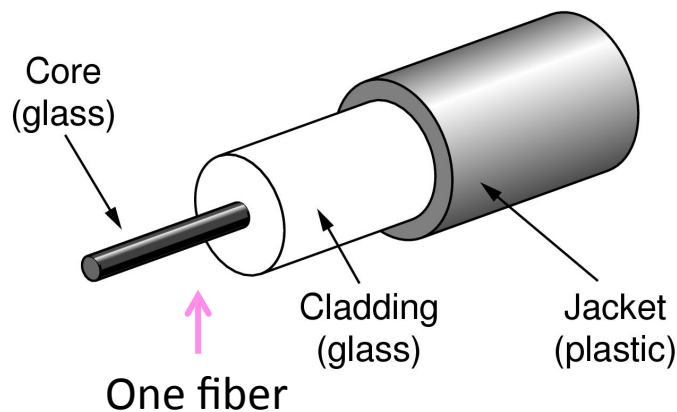

# Wireless


- Sender radiates signal over a region
  - In many directions, unlike a wire, to potentially many receivers
  - Nearby signals (same freq.) interfere at a receiver; need to coordinate use

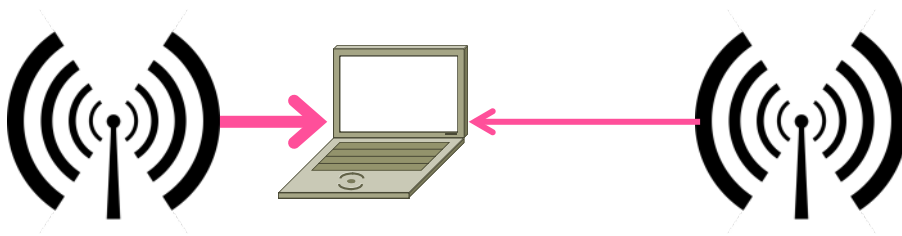




# Wireless (2)

- Microwave, e.g., 3G, and unlicensed (ISM) frequencies, e.g., WiFi, are widely used for computer networking

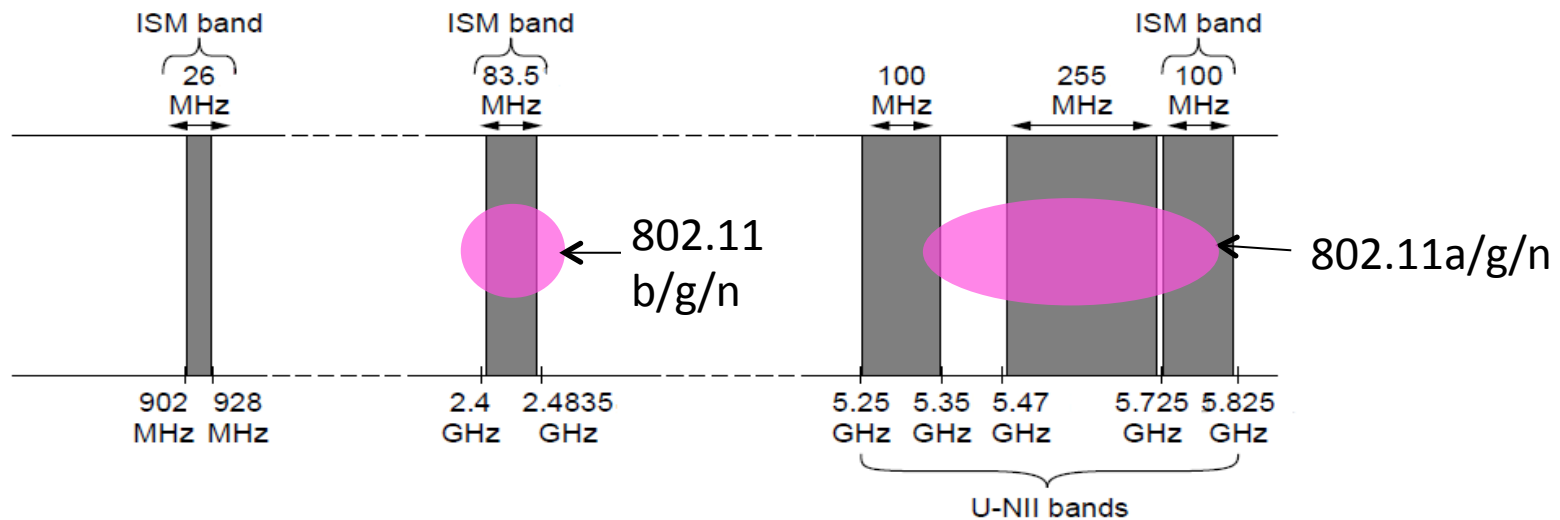

# Topic

- Analog signals encode digital bits.  
We want to know what happens as signals propagate over media


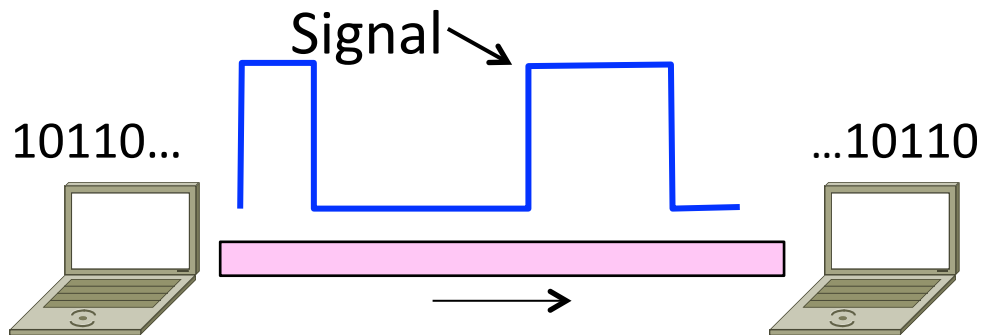




# Frequency Representation



- A signal over time can be represented by its frequency components (called Fourier analysis)

$$g(t) = \frac{1}{2}c + \sum_{n=1}^{\infty} a_n \sin(2\pi nft) + \sum_{n=1}^{\infty} b_n \cos(2\pi nft)$$

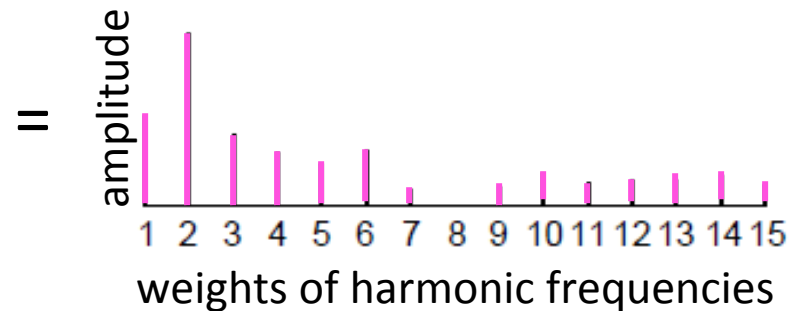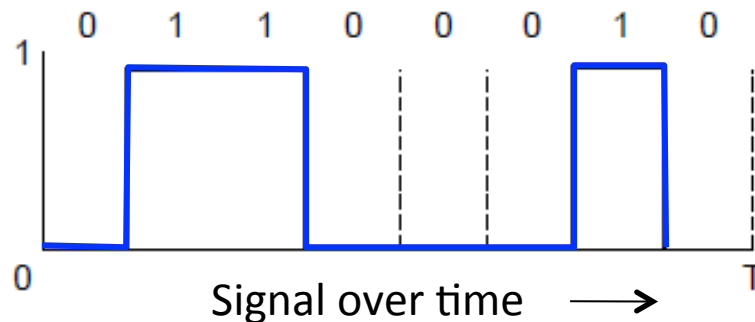

# Effect of Less Bandwidth

- Less bandwidth degrades signal (less rapid transitions)

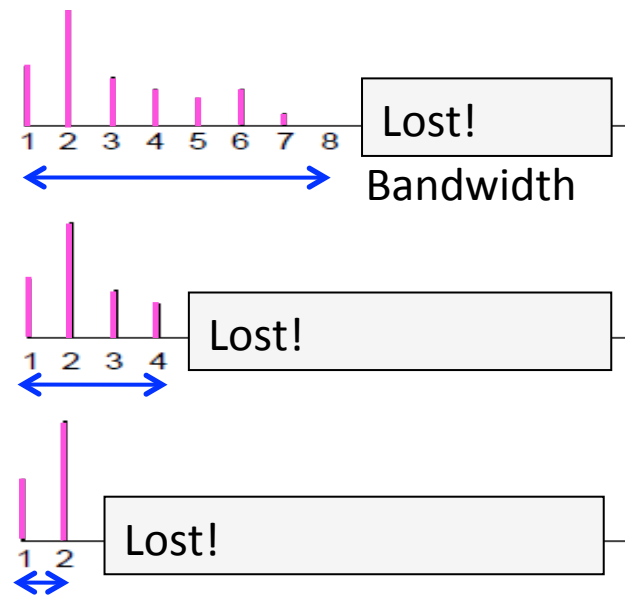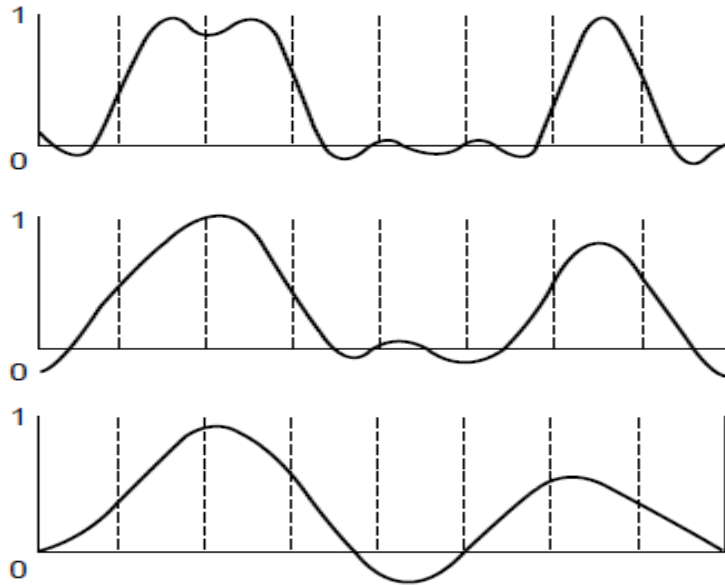

# Signals over a Wire


- What happens to a signal as it passes over a wire?
  - The signal is delayed (propagates at  $\frac{2}{3}c$ )
  - The signal is attenuated (goes for m to km)
  - Noise is added to the signal (later, causes errors)
  - Frequencies above a cutoff are highly attenuated

EE: Bandwidth = width of frequency band, measured in Hz

CS: Bandwidth = information carrying capacity, in bits/sec

# Signals over a Wire (2)

- Example:

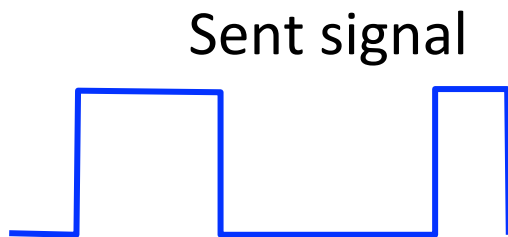

1: Attenuation:




2: Bandwidth:

3: Noise:

# Signals over Fiber

- Light propagates with very low loss in three very wide frequency bands
  - Use a carrier to send information

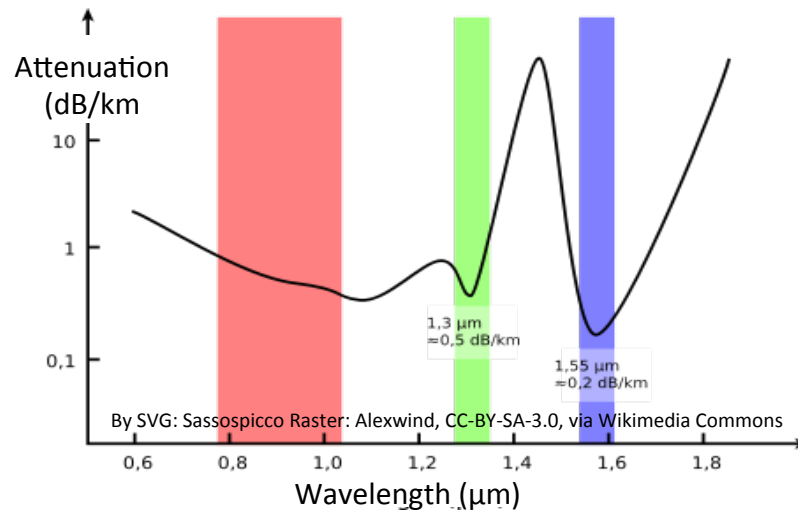


# Signals over Wireless (§2.2)

- Signals transmitted on a carrier frequency
- Travel at speed of light, spread out and attenuate faster than  $1/\text{dist}^2$
- Multiple signals on the same frequency interfere at a receiver
- Other effects are highly frequency dependent, e.g., multipath at microwave frequencies


# Wireless Multipath

- Signals bounce off objects and take multiple paths
  - Some frequencies attenuated at receiver, varies with location
  - Messes up signal; handled with sophisticated methods (§2.5.3)

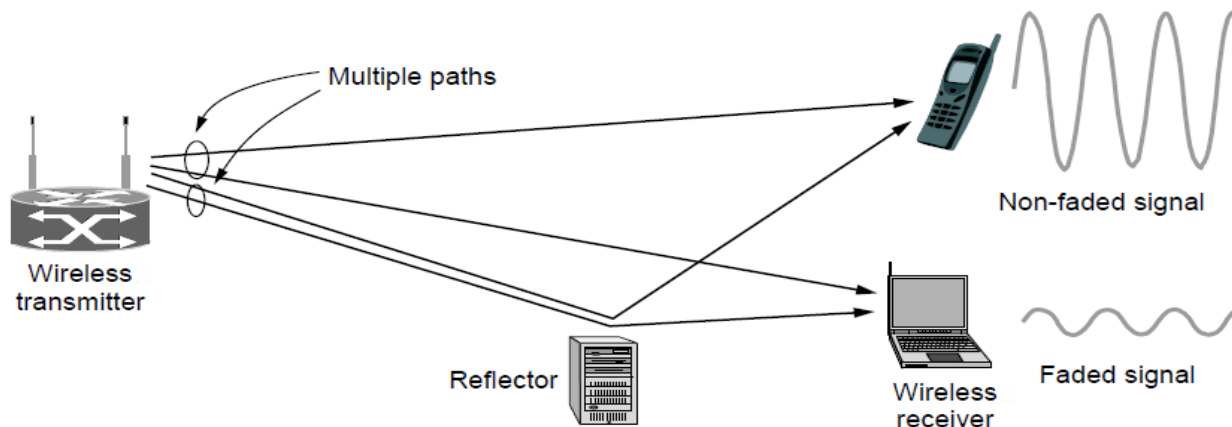

# Topic


- We've talked about signals representing bits. How, exactly?
  - This is the topic of modulation

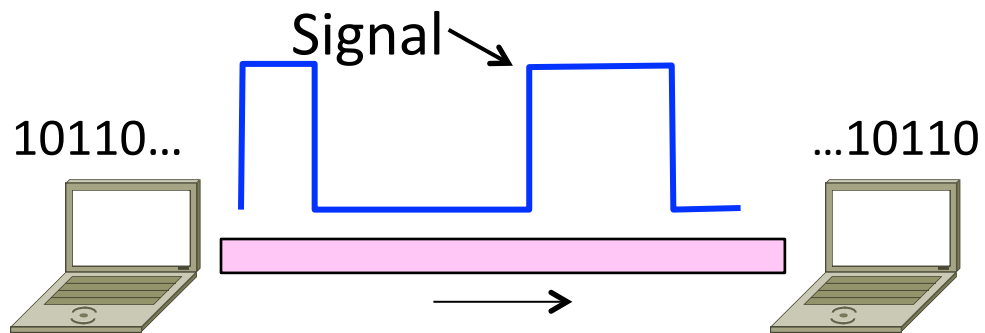




# A Simple Modulation

- Let a high voltage (+V) represent a 1, and low voltage (-V) represent a 0
  - This is called NRZ (Non-Return to Zero)

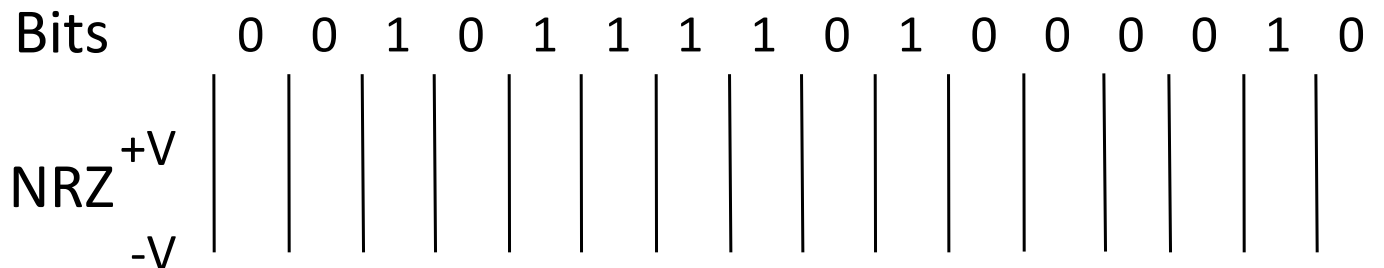

## A Simple Modulation (2)

- Let a high voltage (+V) represent a 1, and low voltage (-V) represent a 0
  - This is called NRZ (Non-Return to Zero)

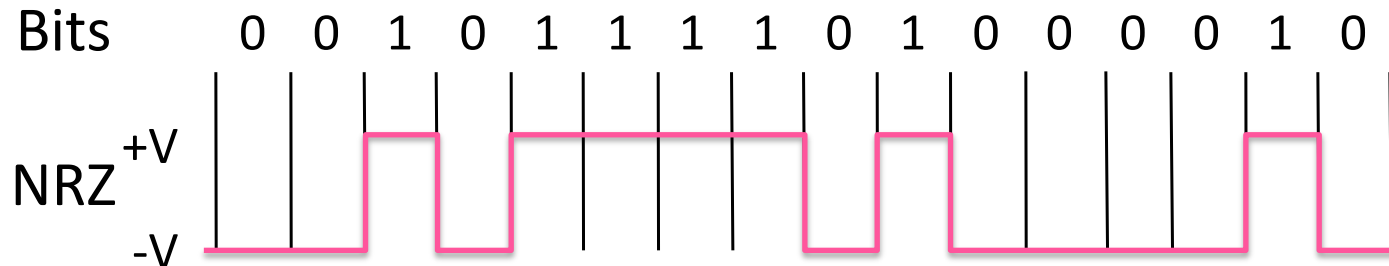

# Many Other Schemes

- Can use more signal levels, e.g., 4 levels is 2 bits per symbol
- Practical schemes are driven by engineering considerations
  - E.g., clock recovery »

# Clock Recovery

- Um, how many zeros was that?
  - Receiver needs frequent signal transitions to decode bits

1 0 0 0 0 0 0 0 0 0 ... 0

- Several possible designs
  - E.g., Manchester coding and scrambling (§2.5.1)

# Clock Recovery – 4B/5B


- Map every 4 data bits into 5 code bits with a transition that are sent
  - 0000 → 11110, 0001 → 01001,  
1110 → 11100, ... 1111 → 11101
  - Has at most 3 zeros in a row

# Clock Recovery – 4B/5B (2)

- 4B/5B code for reference:
  - 0000 → 11110, 0001 → 01001, 1110 → 11100, ... 1111 → 11101
- Message bits: 1 1 1 1 0 0 0 0 0 0 0 1

Coded Bits:

Signal:

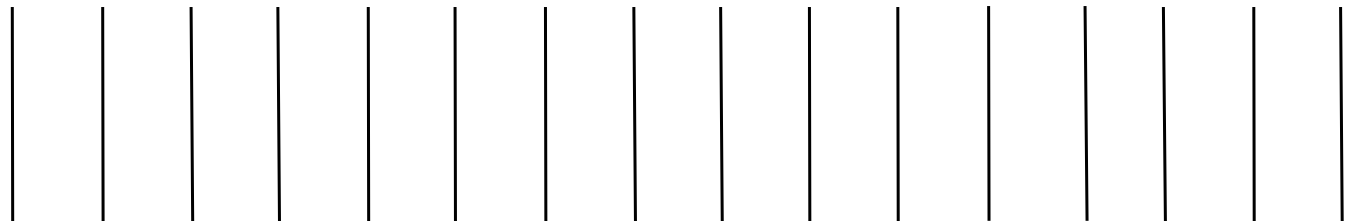


# Passband Modulation

- What we have seen so far is baseband modulation for wires
  - Signal is sent directly on a wire
- These signals do not propagate well on fiber / wireless
  - Need to send at higher frequencies
- Passband modulation carries a signal by modulating a carrier

# Passband Modulation (2)


- Carrier is simply a signal oscillating at a desired frequency:



- We can modulate it by changing:
  - Amplitude, frequency, or phase



# Passband Modulation (3)

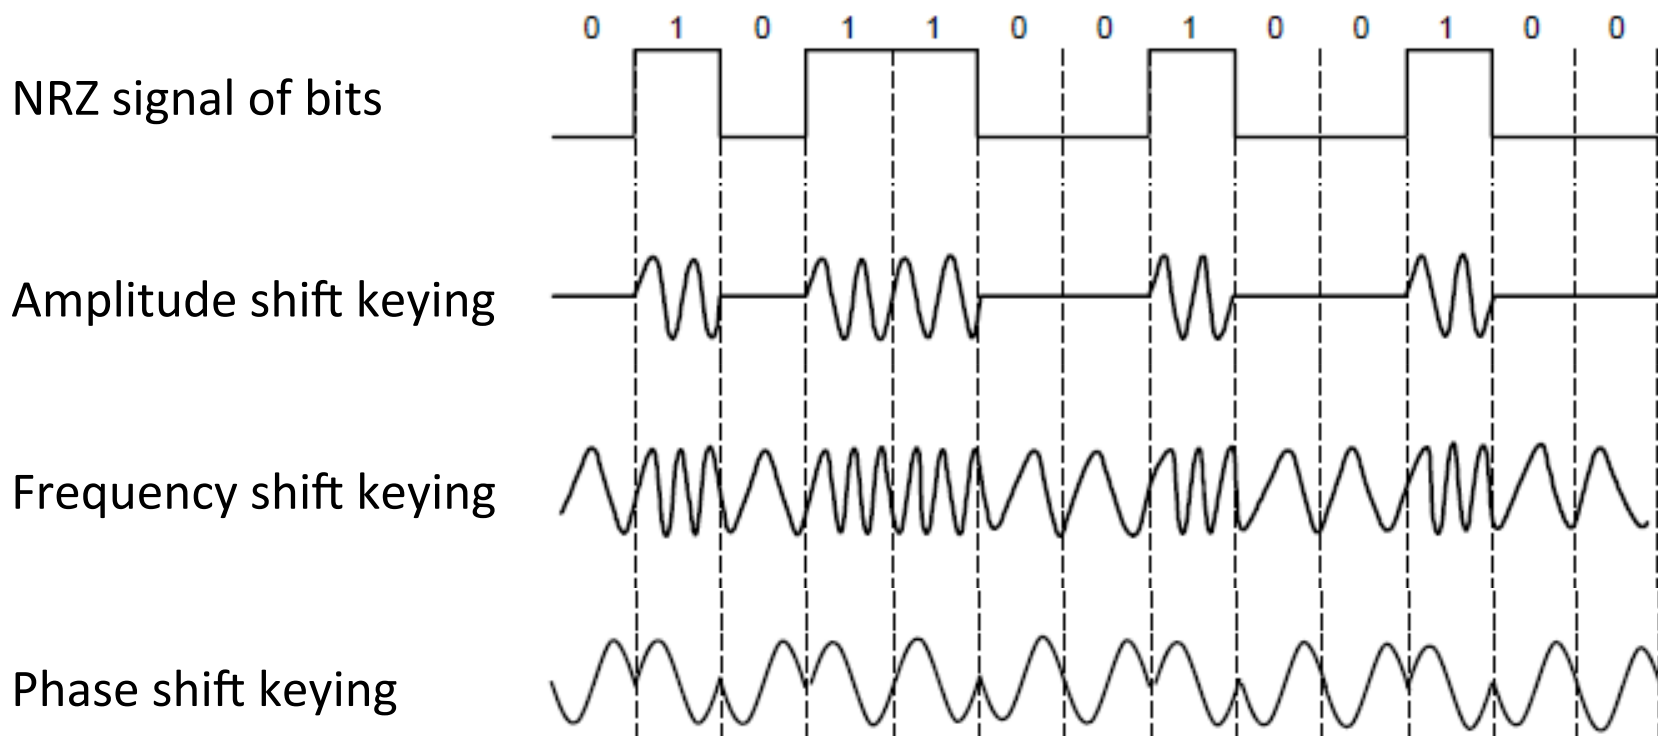

# Introduction to Computer Networks

## Fundamental Limits (§2.2)



Computer Science & Engineering

UNIVERSITY *of* WASHINGTON

# Topic

- How rapidly can we send information over a link?
  - Nyquist limit (~1924) »
  - Shannon capacity (1948) »
- Practical systems are devised to approach these limits


# Key Channel Properties

- The bandwidth (B), signal strength (S), and noise strength (N)
  - B limits the rate of transitions
  - S and N limit how many signal levels we can distinguish



# Nyquist Limit

- The maximum symbol rate is  $2B$

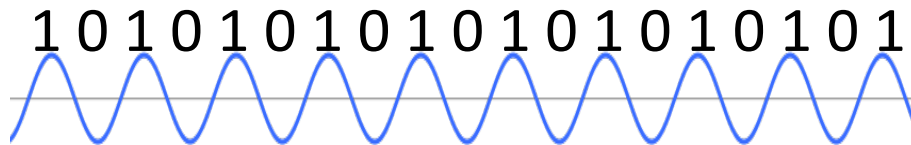


- Thus if there are  $V$  signal levels, ignoring noise, the maximum bit rate is:

$$R = 2B \log_2 V \text{ bits/sec}$$

# Claude Shannon (1916-2001)

- Father of information theory
  - “A Mathematical Theory of Communication”, 1948
- Fundamental contributions to digital computers, security, and communications


Electromechanical mouse  
that “solves” mazes! →

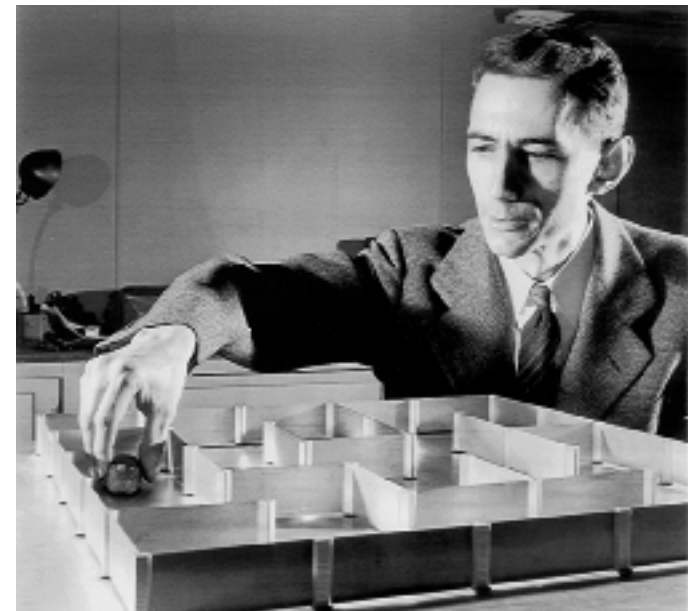

Credit: Courtesy MIT Museum

# Shannon Limit

- How many levels we can distinguish depends on S/N
  - Or SNR, the Signal-to-Noise Ratio
  - Note noise is random, hence some errors
- SNR given on a log-scale in decibels:
  - $\text{SNR}_{\text{dB}} = 10\log_{10}(S/N)$

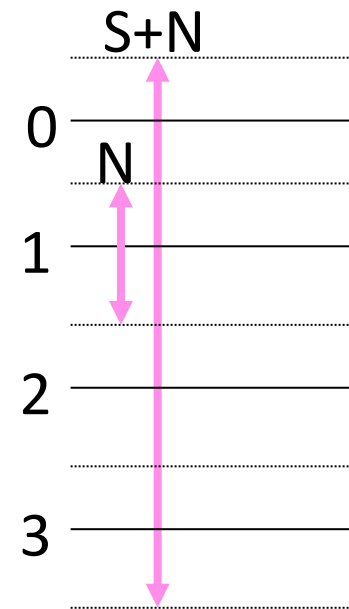

## Shannon Limit (2)


- Shannon limit is for capacity (C), the maximum information carrying rate of the channel:

$$C = B \log_2(1 + S/N) \text{ bits/sec}$$




# Putting it all together – DSL

- DSL (Digital Subscriber Line, see §2.6.3) is widely used for broadband; many variants offer 10s of Mbps
  - Reuses twisted pair telephone line to the home; it has up to ~2 MHz of bandwidth but uses only the lowest ~4 kHz



# DSL (2)

- DSL uses passband modulation
  - Separate bands for upstream and downstream (larger)
  - Modulation called QAM varies both amplitude and phase
  - High SNR, up to 15 bits/symbol, low SNR only 1 bit/symbol

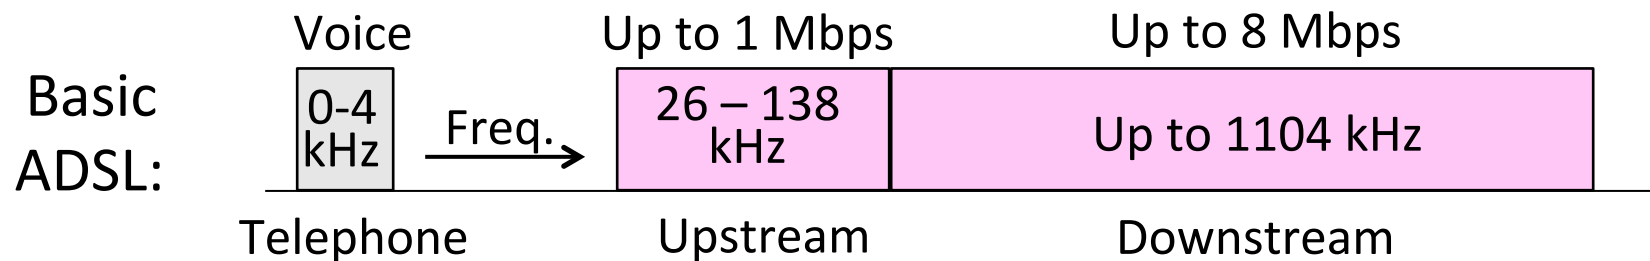

# Wired/Wireless Perspective

- Wires, and Fiber
  - Engineer link to have requisite SNR and B
  - Can fix data rate
- Wireless
  - Given B, but SNR varies greatly, e.g., up to 60 dB!
  - Can't design for worst case, must adapt data rate

# Wired/Wireless Perspective (2)

- Wires, and Fiber Engineer SNR for data rate
  - Engineer link to have requisite SNR and B
  - Can fix data rate
- Wireless Adapt data rate to SNR
  - Given B, but SNR varies greatly, e.g., up to 60 dB!
  - Can't design for worst case, must adapt data rate