

Building Java Programs

Chapter 8

Lecture 8-2: Object Behavior (Methods)
and Constructors, Encapsulation, `this`

reading: 8.2 - 8.3, 8.5 - 8.6

self-checks: #13-17

exercises: #5

Abstraction

Don't need
to know
this

AN x64 PROCESSOR IS SCREAMING ALONG AT BILLIONS OF CYCLES PER SECOND TO RUN THE XNU KERNEL, WHICH IS FRANTICALLY WORKING THROUGH ALL THE POSIX-SPECIFIED ABSTRACTION TO CREATE THE DARWIN SYSTEM UNDERLYING OS X, WHICH IN TURN IS STRAINING ITSELF TO RUN FIREFOX AND ITS GECKO RENDERER, WHICH CREATES A FLASH OBJECT WHICH RENDERS DOZENS OF VIDEO FRAMES EVERY SECOND

BECAUSE I WANTED TO SEE A CAT
JUMP INTO A BOX AND FALL OVER.

I AM A GOD.



Can focus
on this!!

Why objects?

- Primitive types don't model complex concepts well
 - Cost is a double. What's a person?
 - Classes are a way to define new types
 - Many objects can be made from those types
- Values of the same type often are used in similar ways
 - Promote code reuse through instance methods

Recall: Instance methods

- **instance method** (or **object method**): Exists inside each object of a class and gives behavior to each object.

```
public type name (parameters) {  
    statements;  
}
```


- same syntax as static methods, but without `static` keyword

Example:


```
public void shout() {  
    System.out.println("HELLO THERE!");  
}
```

Point objects w/ method

- Each Point object has its own copy of the `distanceFromOrigin` method, which operates on that object's state:





```
Point p1 = new Point();  
p1.x = 7;  
p1.y = 2;
```

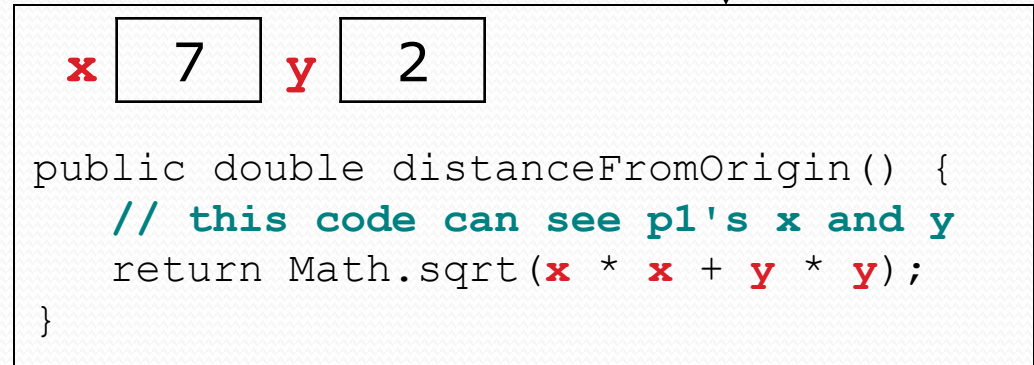

```
Point p2 = new Point();  
p2.x = 4;  
p2.y = 3;
```

```
p1.distanceFromOrigin();  
p2.distanceFromOrigin();
```

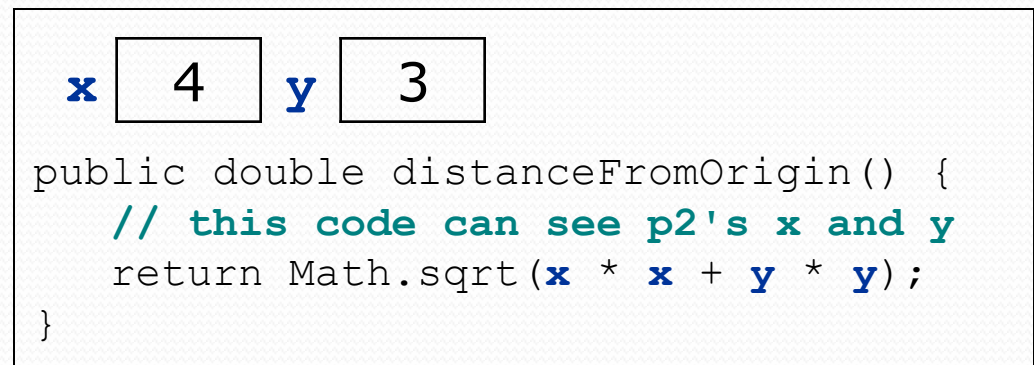

Kinds of methods

- **accessor:** A method that lets clients examine object state.
 - Examples: `distance`, `distanceFromOrigin`
 - often has a non-`void` return type

- **mutator:** A method that modifies an object's state.
 - Examples: `setLocation`, `translate`

Variable names and scope

- Usually it is illegal to have two variables in the same scope with the same name.

```
public class Point {  
    int x;  
    int y;  
    ...  
  
    public void setLocation(int newX, int newY) {  
        x = newX;  
        y = newY;  
    }  
}
```

- The parameters to `setLocation` are named `newX` and `newY` to be distinct from the object's fields `x` and `y`.

Variable shadowing

- An instance method parameter can have the same name as one of the object's fields:

```
// this is legal
public void setLocation(int x, int y) {
    ...
}
```

- Fields `x` and `y` are *shadowed* by parameters with same names.
- Any `setLocation` code that refers to `x` or `y` will use the parameter, not the field.

this

- **this** : A reference to the implicit parameter.
 - *implicit parameter*: object on which a method is called
- Syntax for using `this`:
 - To refer to a field:
`this.field`
 - To call a method:
`this.method (parameters) ;`
 - To call a constructor from another constructor:
`this (parameters) ;`

Avoiding shadowing w/ `this`

```
public class Point {  
    int x;  
    int y;  
  
    ...  
  
    public void setLocation(int x, int y) {  
        this.x = x;  
        this.y = y;  
    }  
}
```

- Inside the `setLocation` method,
 - When `this.x` is seen, the *field* `x` is used.
 - When `x` is seen, the *parameter* `x` is used.

Printing objects

- By default, Java doesn't know how to print objects:

```
Point p = new Point();  
p.x = 10;  
p.y = 7;  
System.out.println("p is " + p); // p is Point@9e8c34
```

```
// better, but cumbersome;           p is (10, 7)  
System.out.println("p is (" + p.x + ", " + p.y + ")");
```

```
// desired behavior  
System.out.println("p is " + p); // p is (10, 7)
```

The toString method

tells Java how to convert an object into a String

```
Point p1 = new Point(7, 2);  
System.out.println("p1: " + p1);
```

```
// the above code is really calling the following:  
System.out.println("p1: " + p1.toString());
```

- Every class has a `toString`, even if it isn't in your code.
 - Default: class's name @ object's memory address (base 16)

```
Point@9e8c34
```

toString syntax

```
public String toString() {  
    code that returns a String representing this object;  
}
```

- Method name, return, and parameters must match exactly.
- Example:

```
// Returns a String representing this Point.  
public String toString() {  
    return "(" + x + ", " + y + " )";  
}
```

Object initialization: constructors

reading: 8.3

Initializing objects

- Currently it takes 3 lines to create a `Point` and initialize it:

```
Point p = new Point();  
p.x = 3;  
p.y = 8; // tedious
```

- We'd rather specify the fields' initial values at the start:

```
Point p = new Point(3, 8); // desired; doesn't work (yet)
```

- We are able to this with most types of objects in Java.

Constructors

- **constructor**: Initializes the state of new objects.

```
public type(parameters) {  
    statements;  
}
```

- runs when the client uses the `new` keyword
- no return type is specified;
it implicitly "returns" the new object being created
- If a class has no constructor, Java gives it a *default constructor* with no parameters that sets all fields to 0.


Constructor example

```
public class Point {  
    int x;  
    int y;  
  
    // Constructs a Point at the given x/y location.  
    public Point(int initialX, int initialY) {  
        x = initialX;  
        y = initialY;  
    }  
  
    public void translate(int dx, int dy) {  
        x = x + dx;  
        y = y + dy;  
    }  
  
    ...  
}
```

Tracing a constructor call

- What happens when the following call is made?

```
Point p1 = new Point(7, 2);
```



```
public Point(int initialX, int initialY) {  
    x = initialX;  
    y = initialY;  
}  
  
public void translate(int dx, int dy) {  
    x += dx;  
    y += dy;  
}
```

Common constructor bugs

1. Re-declaring fields as local variables ("shadowing"):

```
public Point(int initialX, int initialY) {  
    int x = initialX;  
    int y = initialY;  
}
```

- This declares local variables with the same name as the fields, rather than storing values into the fields. The fields remain 0.

2. Accidentally giving the constructor a return type:

```
public void Point(int initialX, int initialY) {  
    x = initialX;  
    y = initialY;  
}
```

- This is actually not a constructor, but a method named `Point`

Client code, version 3

```
public class PointMain3 {
    public static void main(String[] args) {
        // create two Point objects
        Point p1 = new Point(5, 2);
        Point p2 = new Point(4, 3);

        // print each point
        System.out.println("p1: (" + p1.x + ", " + p1.y + ")");
        System.out.println("p2: (" + p2.x + ", " + p2.y + ")");

        // move p2 and then print it again
        p2.translate(2, 4);
        System.out.println("p2: (" + p2.x + ", " + p2.y + ")");
    }
}
```

OUTPUT:

```
p1: (5, 2)
p2: (4, 3)
p2: (6, 7)
```


Multiple constructors

- A class can have multiple constructors.
 - Each one must accept a unique set of parameters.
- *Exercise:* Write a `Point` constructor with no parameters that initializes the point to (0, 0).

```
// Constructs a new point at (0, 0).  
public Point() {  
    x = 0;  
    y = 0;  
}
```

Encapsulation

- **encapsulation:** Hiding implementation details of an object from its clients.
 - Encapsulation provides *abstraction*.
 - separates external view (behavior) from internal view (state)
 - Encapsulation protects the integrity of an object's data.

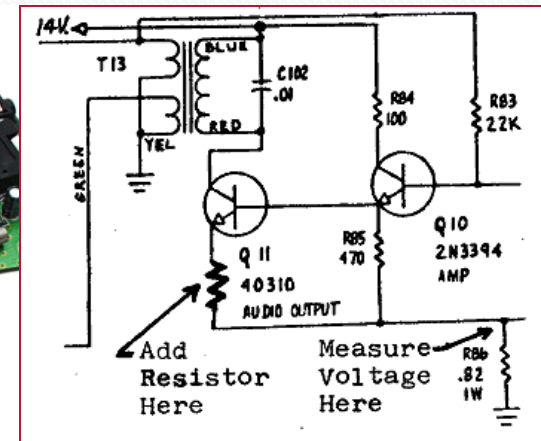

Private fields

- A field can be declared *private*.
 - No code outside the class can access or change it.

```
private type name;
```

- Examples:

```
private int id;  
private String name;
```

- Client code sees an error when accessing private fields:

```
PointMain.java:11: x has private access in Point  
System.out.println("p1 is (" + p1.x + ", " + p1.y + ")");  
                        ^
```

Accessing private state

- We can provide methods to get and/or set a field's value:

```
// A "read-only" access to the x field ("accessor")
public int getX() {
    return x;
}
```

```
// Allows clients to change the x field ("mutator")
public void setX(int newX) {
    x = newX;
}
```

- Client code will look more like this:

```
System.out.println("p1: (" + p1.getX() + ", " + p1.getY() + ")");
p1.setX(14);
```


Point class, version 4

```
// A Point object represents an (x, y) location.
public class Point {
    private int x;
    private int y;

    public Point(int initialX, int initialY) {
        x = initialX;
        y = initialY;
    }

    public double distanceFromOrigin() {
        return Math.sqrt(x * x + y * y);
    }

    public int getX() {
        return x;
    }

    public int getY() {
        return y;
    }

    public void setLocation(int newX, int newY) {
        x = newX;
        y = newY;
    }

    public void translate(int dx, int dy) {
        x = x + dx;
        y = y + dy;
    }
}
```

Client code, version 4

```
public class PointMain4 {
    public static void main(String[] args) {
        // create two Point objects
        Point p1 = new Point(5, 2);
        Point p2 = new Point(4, 3);

        // print each point
        System.out.println("p1: (" + p1.getX() + ", " + p1.getY() + ")");
        System.out.println("p2: (" + p2.getX() + ", " + p2.getY() + ")");


        // move p2 and then print it again
        p2.translate(2, 4);
        System.out.println("p2: (" + p2.getX() + ", " + p2.getY() + ")");
    }
}
```

OUTPUT:

```
p1 is (5, 2)
p2 is (4, 3)
p2 is (6, 7)
```

Benefits of encapsulation

- Provides abstraction between an object and its clients.
- Protects an object from unwanted access by clients.
 - A bank app forbids a client to change an `Account`'s balance.
- Allows you to change the class implementation.
 - `Point` could be rewritten to use polar coordinates (radius r , angle θ), but with the same methods.
- Allows you to constrain objects' state (**invariants**).
 - Example: Only allow `Points` with non-negative coordinates.



Multiple constructors

- It is legal to have more than one constructor in a class.
 - The constructors must accept different parameters.

```
public class Point {
    private int x;
    private int y;

    public Point() {
        x = 0;
        y = 0;
    }

    public Point(int initialX, int initialY) {
        x = initialX;
        y = initialY;
    }

    ...
}
```

Constructors and `this`

- One constructor can call another using `this`:

```
public class Point {  
    private int x;  
    private int y;  
  
    public Point() {  
        this(0, 0); // calls the (x, y) constructor  
    }  
  
    public Point(int x, int y) {  
        this.x = x;  
        this.y = y;  
    }  
  
    ...  
}
```

