

**Course web:** <http://www.cs.washington.edu/311>

**Office hours:** 12 office hours each week  
Me/James: MW 10:30-11:30/2:30-3:30pm or by appointment

**TA Section:** Start next week

**Call me:** Shayan

**Don't:** Actually call me.

**Homework #1:** Will be posted today, due next Friday by midnight (Oct 9<sup>th</sup>)  
**Gradescope!** (stay tuned)

**Extra credit:** Not required to get a 4.0.  
Counts separately.  
In total, may raise grade by ~0.1

**Don't be shy (raise your hand in the back)!**  
**Do space out your participation.**

**If you are not CSE yet, please do well!**

$p$	$\neg p$
T	F
F	T

**NOT**

$p$	$q$	$p \wedge q$
T	T	T
T	F	F
F	T	F
F	F	F

**AND**

$p$	$q$	$p \vee q$
T	T	T
T	F	T
F	T	T
F	F	F

**OR**

$p$	$q$	$p \oplus q$
T	T	F
T	F	T
F	T	T
F	F	F

**XOR**

$$p \rightarrow q$$

---

- “If  $p$ , then  $q$ ” is a **promise**:
  - Whenever  $p$  is true, then  $q$  is true
  - Ask “has the promise been broken”

$p$	$q$	$p \rightarrow q$
F	F	T
F	T	T
T	F	F
T	T	T

*If it's raining, then I have my umbrella.*

- Implication:  $p \rightarrow q$
- Converse:  $q \rightarrow p$
- Contrapositive:  $\neg q \rightarrow \neg p$
- Inverse:  $\neg p \rightarrow \neg q$

How do these relate to each other?

How to see this?

$$p \leftrightarrow q$$

---

- $p$  iff  $q$
- $p$  is equivalent to  $q$
- $p$  implies  $q$  and  $q$  implies  $p$

$p$	$q$	$p \leftrightarrow q$

A fruit is an apple only if it is either red or green and a fruit is not red and green.

$p$  : "Fruit is an apple"

$q$  : "Fruit is red"

$r$  : "Fruit is green"

A fruit is an apple only if it is either red or green and a fruit is not red and green.



(FAppl **only if** (FGreen **xor** FRed)) **and** (**not** (FGreen **and** FRed))



$(FAppl \rightarrow (FGreen \oplus FRed)) \wedge (\neg (FGreen \wedge FRed))$



$p : FApple$

$q : FGreen$

$r : FRed$



## Fruit Sentence with a truth table


---

$p$	$q$	$r$	$q \oplus r$	$p \rightarrow (q \oplus r)$	$q \wedge r$	$\neg(q \wedge r)$	$(p \rightarrow (q \oplus r)) \wedge (\neg(q \wedge r))$
T	T	T					
T	T	F					
T	F	T					
T	F	F					
F	T	T					
F	T	F					
F	F	T					
F	F	F					



Spring 2015

## Lecture 2: Digital circuits & more logic

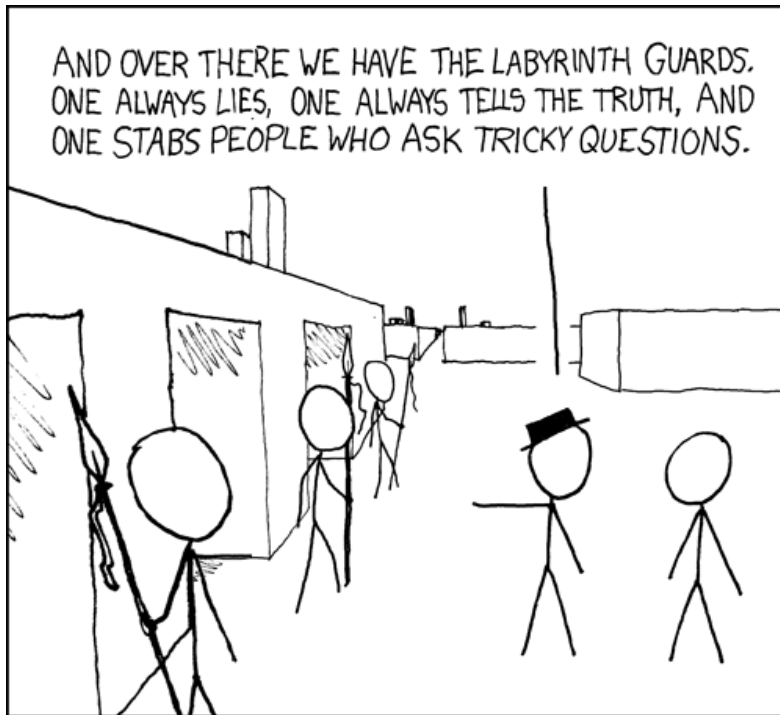

## Computing with logic

- **T** corresponds to 1 or “high” voltage
- **F** corresponds to 0 or “low” voltage

## Gates:

- Take inputs and produce outputs (functions)
- Several kinds of gates
- Correspond to propositional connectives


## AND Connective

vs.


## AND Gate

 $p \wedge q$ 

$p$	$q$	$p \wedge q$
T	T	T
T	F	F
F	T	F
F	F	F



$p$	$q$	OUT
1	1	1
1	0	0
0	1	0
0	0	0

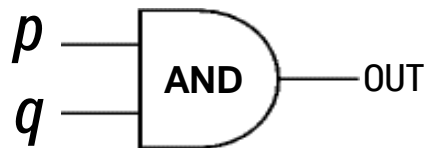

“block looks like D of AND”


## OR Connective

vs.


## OR Gate

$p \vee q$

$p$	$q$	$p \vee q$
T	T	T
T	F	T
F	T	T
F	F	F



$p$	$q$	OUT
1	1	1
1	0	1
0	1	1
0	0	0

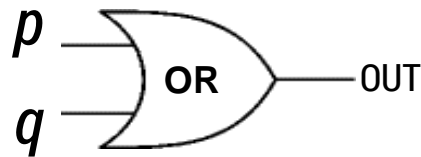


“arrowhead block looks like  $\vee$ ”

## NOT Connective


vs.

NOT Gate (Also called  
*inverter*) $\neg p$ 

$p$	$\neg p$
T	F
F	T





$p$	OUT
1	0
0	1

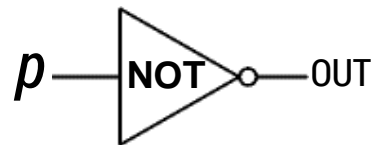





blobs are okay

You can write gates using blobs instead of shapes.

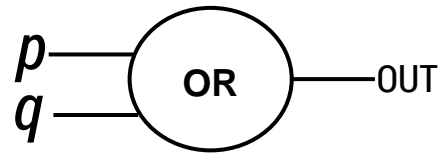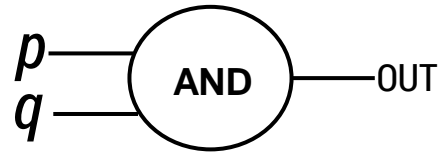

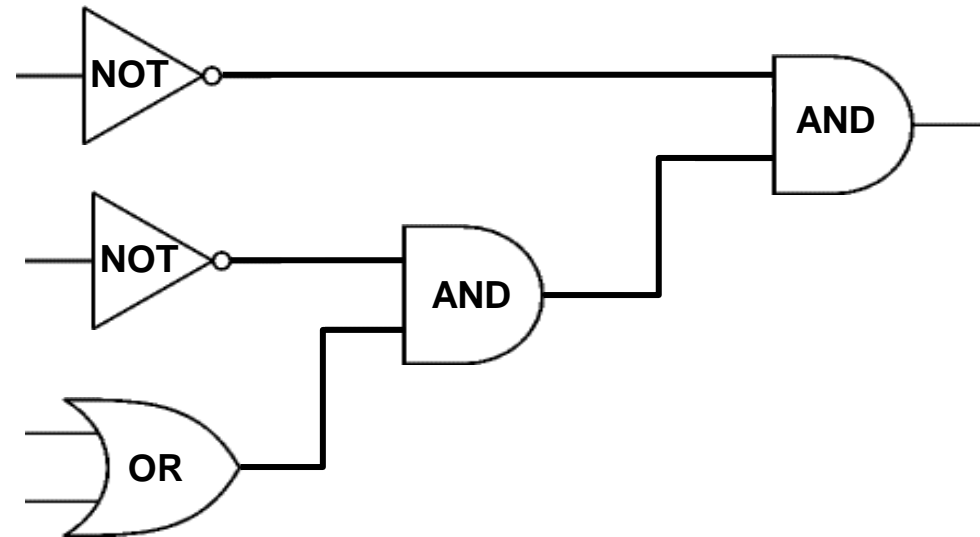

Values get sent along wires connecting gates

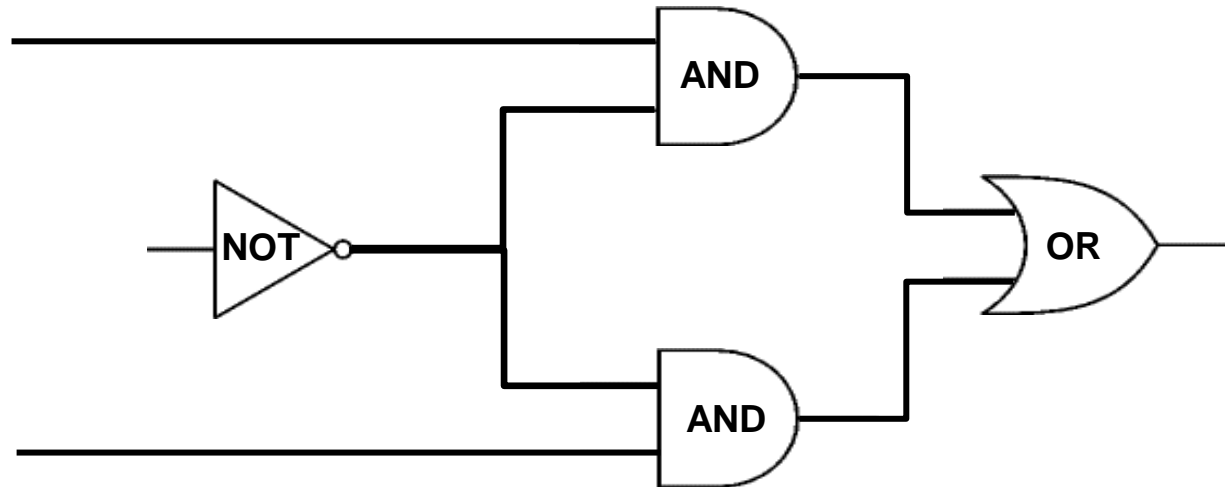

Wires can send one value to multiple gates!



**Terminology:** A compound proposition is a...

- *Tautology* if it is always true
- *Contradiction* if it is always false
- *Contingency* if it can be either true or false

**Classify!**

$$p \vee \neg p$$

$$p \oplus p$$

$$(p \rightarrow q) \wedge p$$


$$(p \wedge q) \vee (p \wedge \neg q) \vee (\neg p \wedge q) \vee (\neg p \wedge \neg q)$$

**Terminology:** A compound proposition is a...

- *Tautology* if it is always true
- *Contradiction* if it is always false
- *Contingency* if it can be either true or false

**Classify!**

$$((p \wedge q \wedge r) \vee (\neg p \wedge q \wedge \neg r)) \wedge ((p \vee q \vee \neg s) \vee (p \wedge q \wedge s))$$

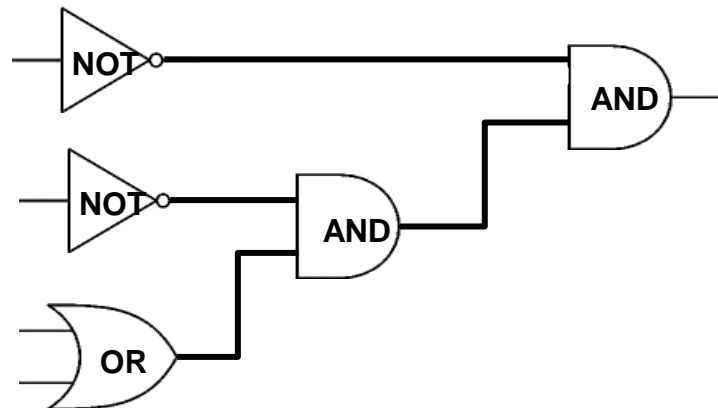

$A$  and  $B$  are *logically equivalent* if and only if

$A \leftrightarrow B$  is a tautology

i.e.  $A$  and  $B$  have the same truth table

The notation  $A \equiv B$  denotes  $A$  and  $B$  are logically equivalent.

Example:  $p \equiv \neg \neg p$

$p$	$\neg p$	$\neg \neg p$	$p \leftrightarrow \neg \neg p$

$A \equiv B$  says that **two** propositions  $A$  and  $B$  *always mean the same thing*.

$A \leftrightarrow B$  is a **single** proposition that may be true or false depending on the truth values of the variables in  $A$  and  $B$ .

but  $A \equiv B$  and  $(A \leftrightarrow B) \equiv \mathbf{T}$  have the same meaning.

Note: Why write  $A \equiv B$  and not  $A=B$  ?

[We use  $A=B$  to say that  $A$  and  $B$  are precisely the same proposition  
(same sequence of symbols)]

My code compiles or there is a bug.

[let's negate it]

Write NAND using NOT and OR:



"Always wear breathable fabrics when you get your picture taken."

**Verify:**  $\neg (p \wedge q) \equiv (\neg p \vee \neg q)$

$p$	$q$	$\neg p$	$\neg q$	$\neg p \vee \neg q$	$p \wedge q$	$\neg (p \wedge q)$	$\neg (p \wedge q) \leftrightarrow (\neg p \vee \neg q)$
T	T						
T	F						
F	T						
F	F						

$$\neg (p \wedge q) \equiv \neg p \vee \neg q$$
$$\neg (p \vee q) \equiv \neg p \wedge \neg q$$

```
if !(front != null && value > front.data)
    front = new ListNode(value, front);
else {
    ListNode current = front;
    while !(current.next == null || current.next.data >= value)
        current = current.next;
    current.next = new ListNode(value, current.next);
}
```

$$(p \rightarrow q) \equiv (\neg p \vee q)$$

$p$	$q$	$p \rightarrow q$	$\neg p$	$\neg p \vee q$	$(p \rightarrow q) \leftrightarrow (\neg p \vee q)$
T	T				
T	F				
F	T				
F	F				



Describe an algorithm for computing if two logical expressions/circuits are equivalent.

What is the run time of the algorithm?

- $x + y = y + x$  (commutativity)
- $x \cdot (y + z) = x \cdot y + x \cdot z$  (distributivity)
- $(x + y) + z = x + (y + z)$  (associativity)

Logic has similar algebraic properties

- $x + y = y + x$  (commutativity)
  - $p \vee q \equiv q \vee p$
  - $p \wedge q \equiv q \wedge p$
- $x \cdot (y + z) = x \cdot y + x \cdot z$  (distributivity)
  - $p \wedge (q \vee r) \equiv (p \wedge q) \vee (p \wedge r)$
  - $p \vee (q \wedge r) \equiv (p \vee q) \wedge (p \vee r)$
- $(x + y) + z = x + (y + z)$  (associativity)
  - $(p \vee q) \vee r \equiv p \vee (q \vee r)$
  - $(p \wedge q) \wedge r \equiv p \wedge (q \wedge r)$

- **Identity**

- $p \wedge T \equiv p$
- $p \vee F \equiv p$

- **Domination**

- $p \vee T \equiv T$
- $p \wedge F \equiv F$

- **Idempotent**

- $p \vee p \equiv p$
- $p \wedge p \equiv p$

- **Commutative**

- $p \vee q \equiv q \vee p$
- $p \wedge q \equiv q \wedge p$

**You will always get this list.**

- **Associative**

$$(p \vee q) \vee r \equiv p \vee (q \vee r)$$
$$(p \wedge q) \wedge r \equiv p \wedge (q \wedge r)$$

- **Distributive**

$$p \wedge (q \vee r) \equiv (p \wedge q) \vee (p \wedge r)$$
$$p \vee (q \wedge r) \equiv (p \vee q) \wedge (p \vee r)$$

- **Absorption**

$$p \vee (p \wedge q) \equiv p$$
$$p \wedge (p \vee q) \equiv p$$

- **Negation**

$$p \vee \neg p \equiv T$$
$$p \wedge \neg p \equiv F$$