


Building Java Programs

Chapter 4
Lecture 4-1: Scanner; if/else

reading: 3.3 – 3.4, 4.1, 4.5

A GUIDE TO UNDERSTANDING FLOW CHARTS PRESENTED IN FLOW CHART FORM

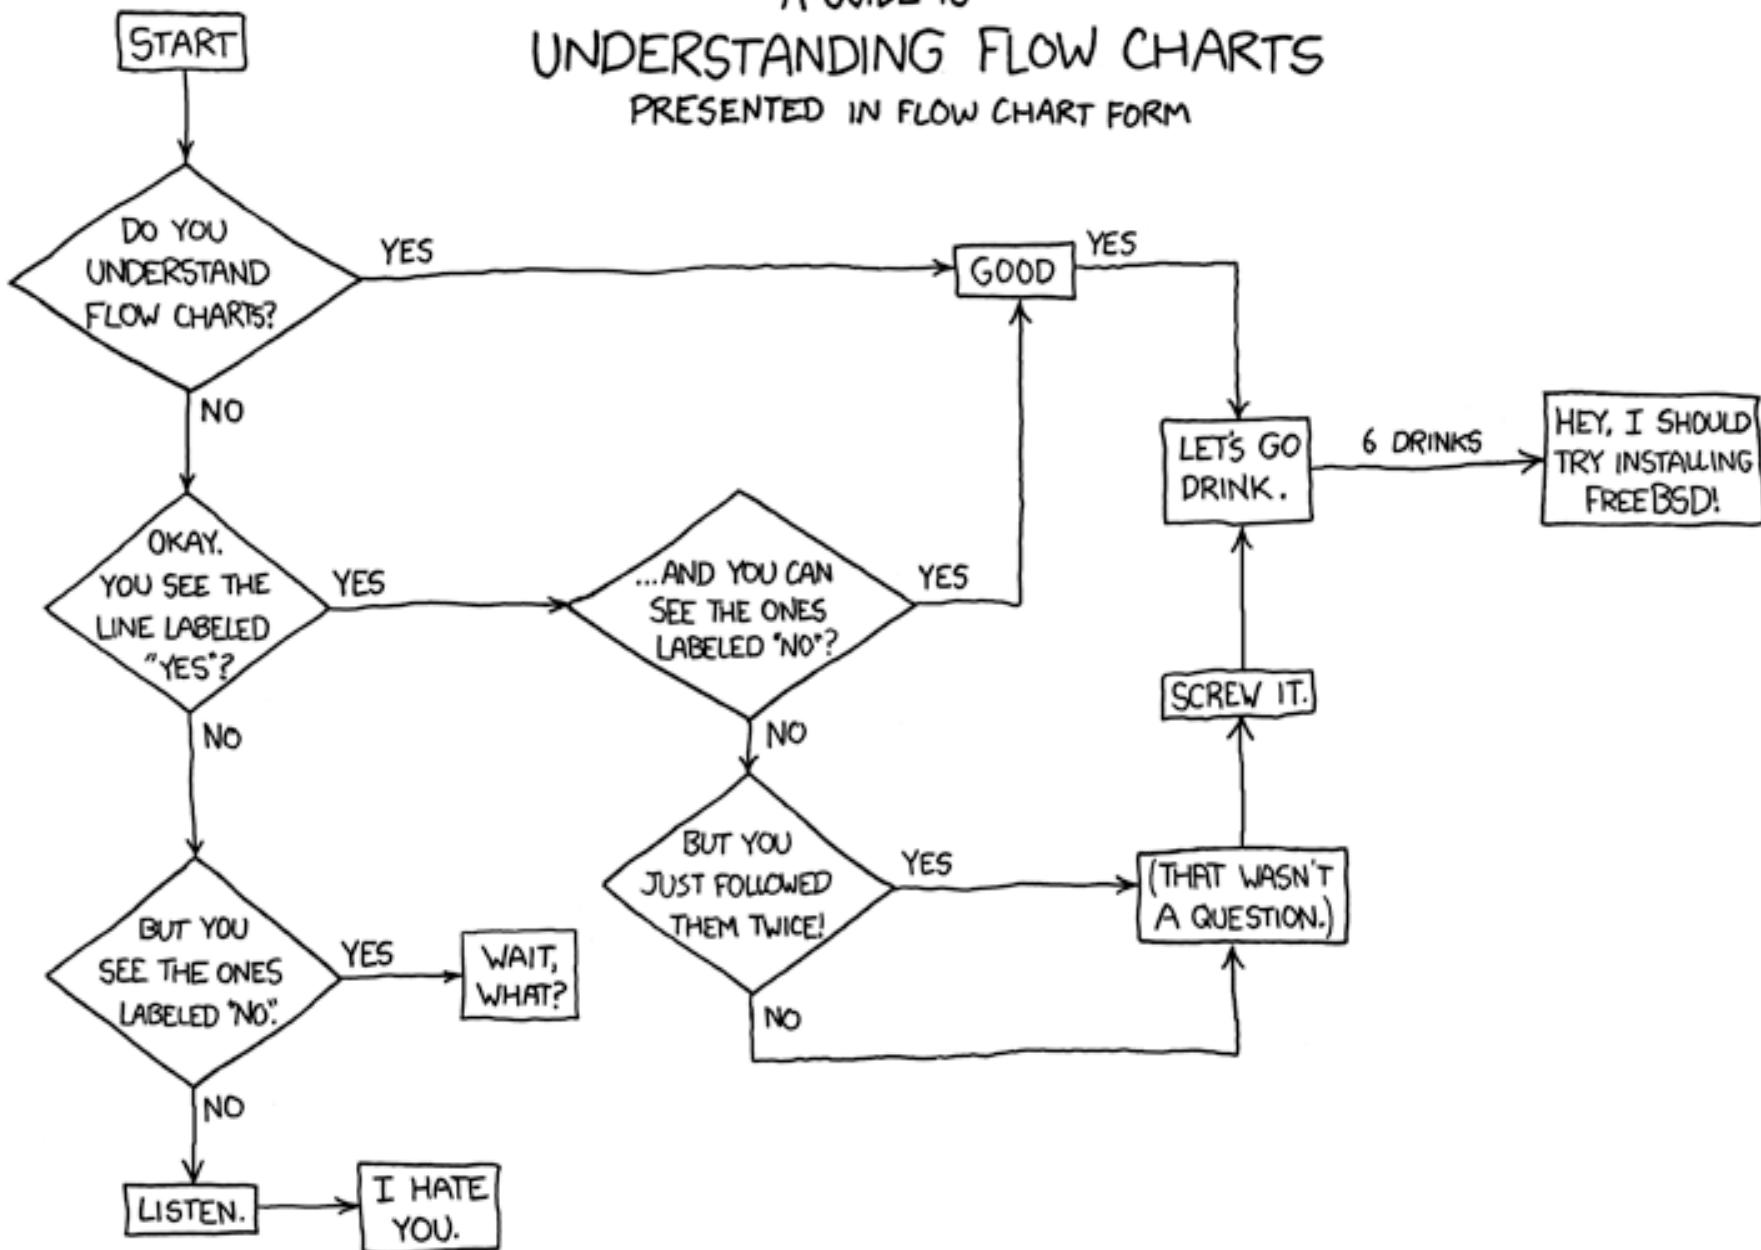

Interactive Programs with Scanner

reading: 3.3 - 3.4

Interactive programs

interactive program: Reads input from the console.

- While the program runs, it asks the user to type input.
 - The input typed by the user is stored in variables in the code.
-
- Can be tricky; users are unpredictable and misbehave.
 - But interactive programs have more interesting behavior.

Scanner

- **Scanner:** An object that can read input from many sources.
 - Communicates with `System.in`
 - Can also read from files (Ch. 6), web sites, databases, ...
- The `Scanner` class is found in the `java.util` package.

```
import java.util.*;    // so you can use Scanner
```

- Constructing a `Scanner` object to read console input:

```
Scanner name = new Scanner(System.in);
```

- Example:

```
Scanner console = new Scanner(System.in);
```

Scanner methods

Method	Description
nextInt()	reads an int from the user and returns it
nextDouble()	reads a double from the user
next()	reads a one-word String from the user
nextLine()	reads a one-line String from the user


- Each method waits until the user presses Enter.
- The value typed by the user is returned.

```
System.out.print("How old are you? "); // prompt  
int age = console.nextInt();  
System.out.println("You typed " + age);
```

- **prompt:** A message telling the user what input to type.

Scanner example

```
import java.util.*; // so that I can use Scanner  
  
public class UserInputExample {  
    public static void main(String[] args) {  
        Scanner console = new Scanner(System.in);  
  
        → System.out.print("How old are you? ");  
        → int age = console.nextInt()   
  
        → int years = 65 - age;  
        System.out.println(years + " years until retirement!");  
    }  
}
```

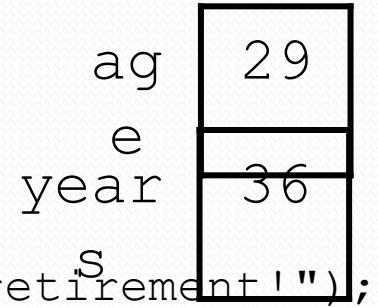

- Console (user input underlined):

How old are you? 29 ←
36 years until retirement!



Input tokens

- **token:** A unit of user input, as read by the Scanner.
 - Tokens are separated by *whitespace* (spaces, tabs, new lines).
 - How many tokens appear on the following line of input?

23 John Smith 42.0 "Hello world" \$2.50 " 19"

- When a token is not the type you ask for, it crashes.

```
System.out.print("What is your age? ");
int age = console.nextInt();
```

Output:

```
What is your age? Timmy
java.util.InputMismatchException
  at java.util.Scanner.next(Unknown Source)
  at java.util.Scanner.nextInt(Unknown Source)
  ...
  ...
```

Scanner example 2

```
import java.util.*;    // so that I can use Scanner  
  
public class ScannerMultiply {  
    public static void main(String[] args) {  
        Scanner console = new Scanner(System.in);  
  
        System.out.print("Please type two numbers: ");  
        int num1 = console.nextInt();  
        int num2 = console.nextInt();  
  
        int product = num1 * num2;  
        System.out.println("The product is " + product);  
    }  
}
```

- Output (user input underlined):

Please type two numbers: 8 6

The product is 48

- The Scanner can read multiple values from one line.

Scanners as parameters

- If many methods need to read input, declare a Scanner in main and pass it to the other methods as a parameter.

```
public static void main(String[] args) {  
    Scanner console = new Scanner(System.in);  
    int sum = readSum3(console);  
    System.out.println("The sum is " + sum);  
}  
  
// Prompts for 3 numbers and returns their sum.  
public static int readSum3(Scanner console) {  
    System.out.print("Type 3 numbers: ");  
    int num1 = console.nextInt();  
    int num2 = console.nextInt();  
    int num3 = console.nextInt();  
    return num1 + num2 + num3;  
}
```


The if/else statement

reading: 4.1, 4.5

The if statement

Executes a block of statements only if a test is true

```
if (test) {  
    statement;  
    ...  
    statement;  
}
```

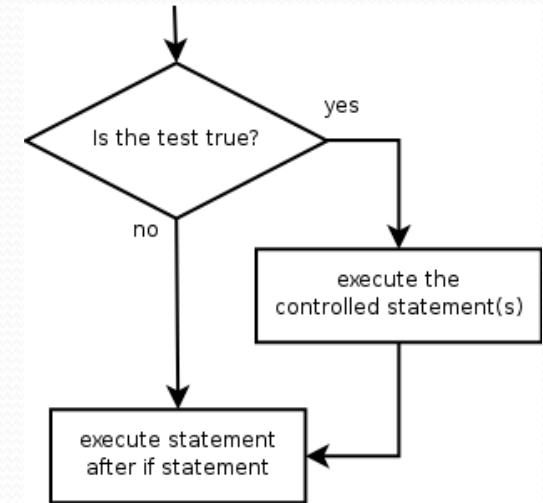

- Example:

```
double gpa = console.nextDouble();  
if (gpa >= 2.0) {  
    System.out.println("Application accepted.");  
}
```

Relational expressions

- if statements and for loops both use logical tests.

```
for (int i = 1; i <= 10; i++) { ...  
if (i <= 10) { ...
```


- These are boolean expressions, seen in Ch. 5.
- Tests use *relational operators*:

Operator	Meaning	Example	Value
==	equals	1 + 1 == 2	true
!=	does not equal	3.2 != 2.5	true
<	less than	10 < 5	false
>	greater than	10 > 5	true
<=	less than or equal to	126 <= 100	false
>=	greater than or equal to	5.0 >= 5.0	true

The if/else statement

Executes one block if a test is true, another if false

```
if (test) {  
    statement(s);  
} else {  
    statement(s);  
}
```

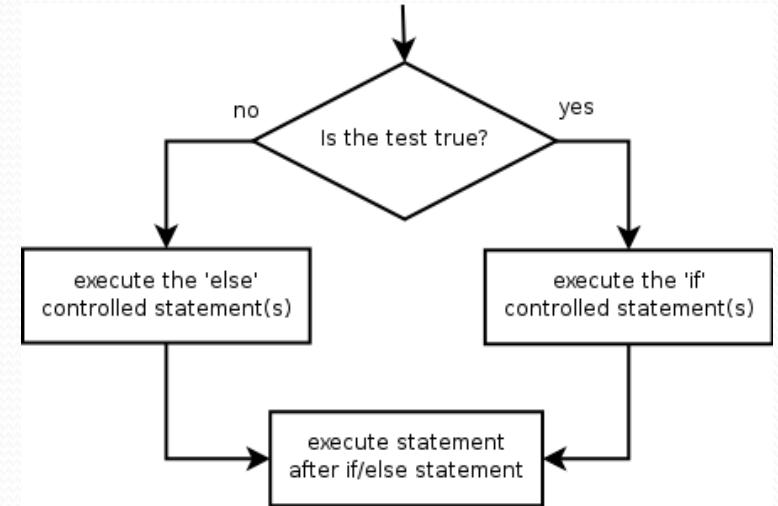


- Example:

```
double gpa = console.nextDouble();  
if (gpa >= 2.0) {  
    System.out.println("Welcome to Mars University!");  
} else {  
    System.out.println("Application denied.");  
}
```

Misuse of if

- What's wrong with the following code?

```
Scanner console = new Scanner(System.in);
System.out.print("What percentage did you earn? ");
int percent = console.nextInt();
if (percent >= 90) {
    System.out.println("You got an A!");
}
if (percent >= 80) {
    System.out.println("You got a B!");
}
if (percent >= 70) {
    System.out.println("You got a C!");
}
if (percent >= 60) {
    System.out.println("You got a D!");
}
if (percent < 60) {
    System.out.println("You got an F!");
}
...
```

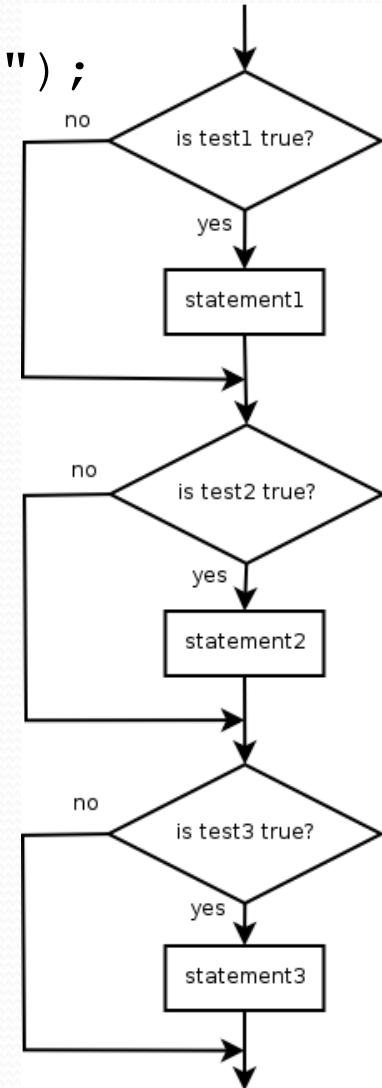


Nested if/else

Chooses between outcomes using many tests

```
if (test) {  
    statement(s);  
} else if (test) {  
    statement(s);  
} else {  
    statement(s);  
}
```

- Example:


```
if (x > 0) {  
    System.out.println("Positive");  
} else if (x < 0) {  
    System.out.println("Negative");  
} else {  
    System.out.println("Zero");  
}
```

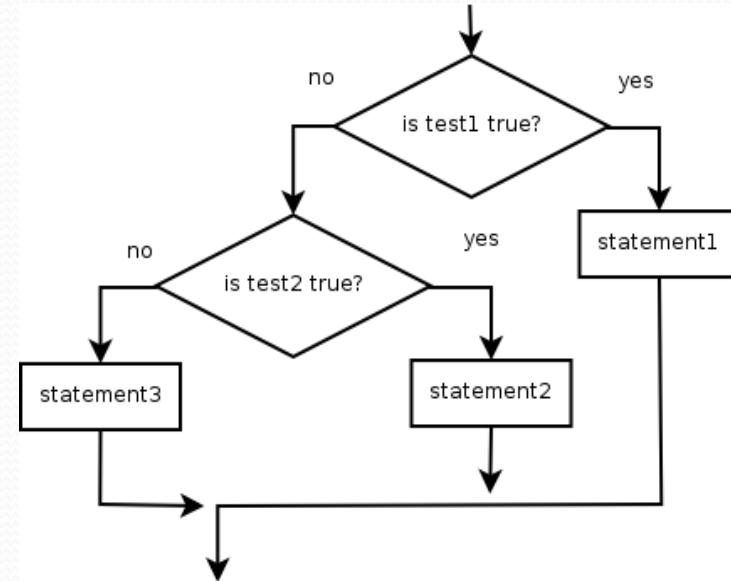

Nested if/else/if

- If it ends with `else`, exactly one path must be taken.
- If it ends with `if`, the code might not execute any path.

```
if (test) {  
    statement(s);  
} else if (test) {  
    statement(s);  
} else if (test) {  
    statement(s);  
}
```

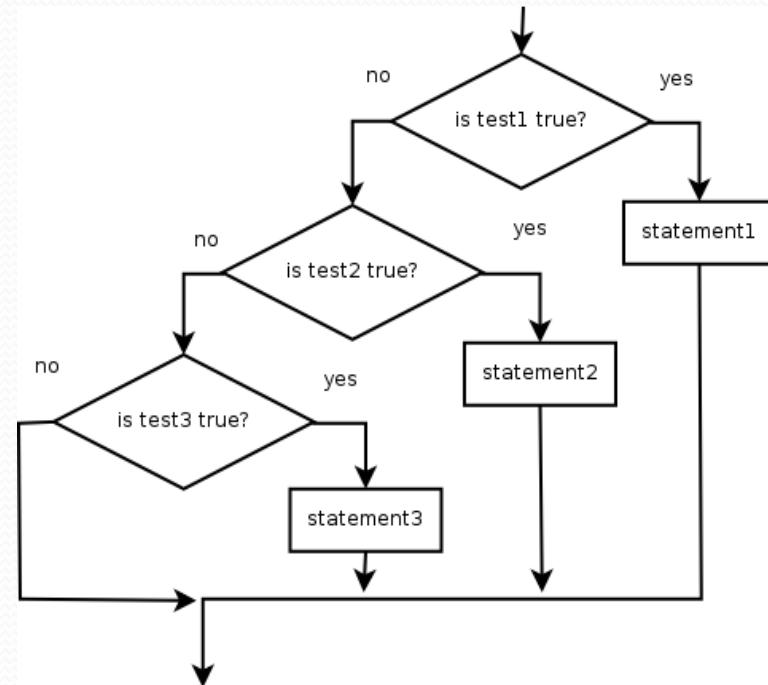

- Example:

```
if (place == 1) {  
    System.out.println("Gold medal!");  
} else if (place == 2) {  
    System.out.println("Silver medal!");  
} else if (place == 3) {  
    System.out.println("Bronze medal.");  
}
```

Nested if structures

- exactly 1 path (*mutually exclusive*)

```
if (test) {  
    statement(s);  
} else if (test) {  
    statement(s);  
} else {  
    statement(s);  
}
```

- 0 or 1 path (*mutually exclusive*)

```
if (test) {  
    statement(s);  
} else if (test) {  
    statement(s);  
} else if (test) {  
    statement(s);  
}
```

- 0, 1, or many paths (*independent tests; not exclusive*)

```
if (test) {  
    statement(s);  
}  
if (test) {  
    statement(s);  
}  
if (test) {  
    statement(s);  
}
```

Which nested if/else?

- **(1) if/if/if (2) nested if/else (3) nested if/else if**
 - Whether a user is lower, middle, or upper-class based on income.
 - **(2) nested if / else if / else**
 - Whether you made the dean's list ($\text{GPA} \geq 3.8$) or honor roll (3.5-3.8).
 - **(3) nested if / else if**
 - Whether a number is divisible by 2, 3, and/or 5.
 - **(1) sequential if / if / if**
 - Computing a grade of A, B, C, D, or F based on a percentage.
 - **(2) nested if / else if / else if / else if / else**

Nested if/else question

Formula for body mass index (BMI):

$$BMI = \frac{weight}{height^2} \times 703$$

BMI	Weight class
below 18.5	underweight
18.5 - 24.9	normal
25.0 - 29.9	overweight
30.0 and up	obese

- Write a program that produces output like the following:

This program reads data for two people and computes their body mass index (BMI).

Enter next person's information:

height (in inches) ? 70.0

weight (in pounds) ? 194.25

Enter next person's information:

height (in inches) ? 62.5

weight (in pounds) ? 130.5

Person 1 BMI = 27.868928571428572

overweight

Person 2 BMI = 23.485824

normal

Difference = 4.3831045714285715

Nested if/else answer

```
// This program computes two people's body mass index (BMI) and
// compares them. The code uses Scanner for input, and parameters/returns.

import java.util.*; // so that I can use Scanner

public class BMI {
    public static void main(String[] args) {
        introduction();
        Scanner console = new Scanner(System.in);

        double bmi1 = person(console);
        double bmi2 = person(console);

        // report overall results
        report(1, bmi1);
        report(2, bmi2);
        System.out.println("Difference = " + Math.abs(bmi1 - bmi2));

    }

    // prints a welcome message explaining the program
    public static void introduction() {
        System.out.println("This program reads data for two people and");
        System.out.println("computes their body mass index (BMI).");
        System.out.println();
    }
}

...
```

Nested if/else, cont'd.

```
// reads information for one person, computes their BMI, and returns it
public static double person(Scanner console) {
    System.out.println("Enter next person's information:");
    System.out.print("height (in inches)? ");
    double height = console.nextDouble();

    System.out.print("weight (in pounds)? ");
    double weight = console.nextDouble();
    System.out.println();

    double bodyMass = bmi(height, weight);
    return bodyMass;
}

// Computes/returns a person's BMI based on their height and weight.
public static double bmi(double height, double weight) {
    return (weight * 703 / height / height);
}

// Outputs information about a person's BMI and weight status.
public static void report(int number, double bmi) {
    System.out.println("Person " + number + " BMI = " + bmi);
    if (bmi < 18.5) {
        System.out.println("underweight");
    } else if (bmi < 25) {
        System.out.println("normal");
    } else if (bmi < 30) {
        System.out.println("overweight");
    } else {
        System.out.println("obese");
    }
}
```