

# CSE 351 Reference Sheet

Binary	Decimal	Hex
0000	0	0
0001	1	1
0010	2	2
0011	3	3
0100	4	4
0101	5	5
0110	6	6
0111	7	7
1000	8	8
1001	9	9
1010	10	A
1011	11	B
1100	12	C
1101	13	D
1110	14	E
1111	15	F

$2^0$	$2^1$	$2^2$	$2^3$	$2^4$	$2^5$	$2^6$	$2^7$	$2^8$	$2^9$	$2^{10}$
1	2	4	8	16	32	64	128	256	512	1024


**IEEE 754 FLOATING-POINT STANDARD**  
Value:  $\pm 1 \times \text{Mantissa} \times 2^{\text{Exponent}}$   
Bit Fields:  $(-1)^S \times 1.M \times 2^{(E+\text{bias})}$   
where Single Precision Bias = -127,  
Double Precision Bias = -1023.

**IEEE Single Precision and Double Precision Formats:**

**IEEE 754 Symbols**

Exponent	Fraction	Object
0	0	$\pm 0$
0	$\neq 0$	$\pm$ Denorm
1 to MAX - 1	anything	$\pm$ Fl. Pt. Num.
MAX	0	$\pm\infty$
MAX	$\neq 0$	NaN

S.P. MAX = 255, D.P. MAX = 2047

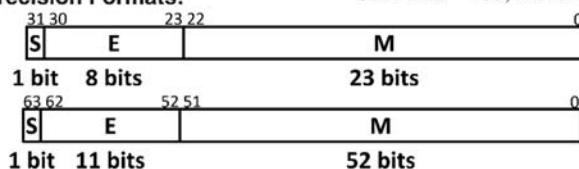

## Assembly Instructions

<b>mov a, b</b>	Copy from a to b.
<b>movs a, b</b>	Copy from a to b with sign extension.
<b>movz a, b</b>	Copy from a to b with zero extension.
<b>lea a, b</b>	Compute address and store in b. <i>Note:</i> the scaling parameter of memory operands can only be 1, 2, 4, or 8.
<b>push src</b>	Push src onto the stack and decrement stack pointer.
<b>pop dst</b>	Pop from the stack into dst and increment stack pointer.
<b>call &lt;func&gt;</b>	Push return address onto stack and jump to a procedure.
<b>ret</b>	Pop return address and jump there.
<b>add a, b</b>	Add from a to b and store in b (and sets flags).
<b>imul a, b</b>	Multiply a and b and store in b (and sets flags).
<b>and a, b</b>	Bitwise AND of a and b, store in b (and sets flags).
<b>sar a, b</b>	Shift value of b <i>right (arithmetic)</i> by a bits, store in b (and sets flags).
<b>shr a, b</b>	Shift value of b <i>right (logical)</i> by a bits, store in b (and sets flags).
<b>shl a, b</b>	Shift value of b <i>left</i> by a bits, store in b (and sets flags).
<b>cmp a, b</b>	Compare b with a (compute b-a and set condition codes based on result).
<b>test a, b</b>	Bitwise AND of a and b and set condition codes based on result.
<b>jmp &lt;label&gt;</b>	Unconditional jump to address.
<b>j* &lt;label&gt;</b>	Conditional jump based on condition codes ( <i>more on next page</i> ).
<b>set* a</b>	Set byte based on condition codes.

## Conditionals

Instruction		cmp b, a	test a, b
<b>je</b>	"Equal"	a == b	a & b == 0
<b>jne</b>	"Not equal"	a != b	a & b != 0
<b>js</b>	"Sign" (negative)		a & b < 0
<b>jns</b>	(non-negative)		a & b >= 0
<b>jg</b>	"Greater"	a > b	a & b > 0
<b>jge</b>	"Greater or equal"	a >= b	a & b >= 0
<b>jl</b>	"Less"	a < b	a & b < 0
<b>jle</b>	"Less or equal"	a <= b	a & b <= 0
<b>ja</b>	"Above" (unsigned >)	a > b	
<b>jb</b>	"Below" (unsigned >)	a < b	

## Sizes

C type	x86-64 suffix	Size (bytes)
char	b	1
short	w	2
int	l	4
long	q	8

## Registers

Name	Convention	Name of "virtual" register		
		Lowest 4 bytes	Lowest 2 bytes	Lowest byte
%rax	Return value – <b>Caller</b> saved	%eax	%ax	%al
%rbx	<b>Callee</b> saved	%ebx	%bx	%bl
%rcx	Argument #4 – <b>Caller</b> saved	%ecx	%cx	%cl
%rdx	Argument #3 – <b>Caller</b> saved	%edx	%dx	%dl
%rsi	Argument #2 – <b>Caller</b> saved	%esi	%si	%sil
%rdi	Argument #1 – <b>Caller</b> saved	%edi	%di	%dil
%rsp	Stack Pointer	%esp	%sp	%spl
%rbp	<b>Callee</b> saved	%ebp	%bp	%bpl
%r8	Argument #5 – <b>Caller</b> saved	%r8d	%r8w	%r8b
%r9	Argument #6 – <b>Caller</b> saved	%r9d	%r9w	%r9b
%r10	<b>Caller</b> saved	%r10d	%r10w	%r10b
%r11	<b>Caller</b> saved	%r11d	%r11w	%r11b
%r12	<b>Callee</b> saved	%r12d	%r12w	%r12b
%r13	<b>Callee</b> saved	%r13d	%r13w	%r13b
%r14	<b>Callee</b> saved	%r14d	%r14w	%r14b
%r15	<b>Callee</b> saved	%r15d	%r15w	%r15b