

Data III & Integers I

CSE 351 Autumn 2016

Instructor:

Justin Hsia

Teaching Assistants:

Chris Ma

Hunter Zahn

John Kaltenbach

Kevin Bi

Sachin Mehta


Suraj Bhat

Thomas Neuman

Waylon Huang

Xi Liu

Yufang Sun

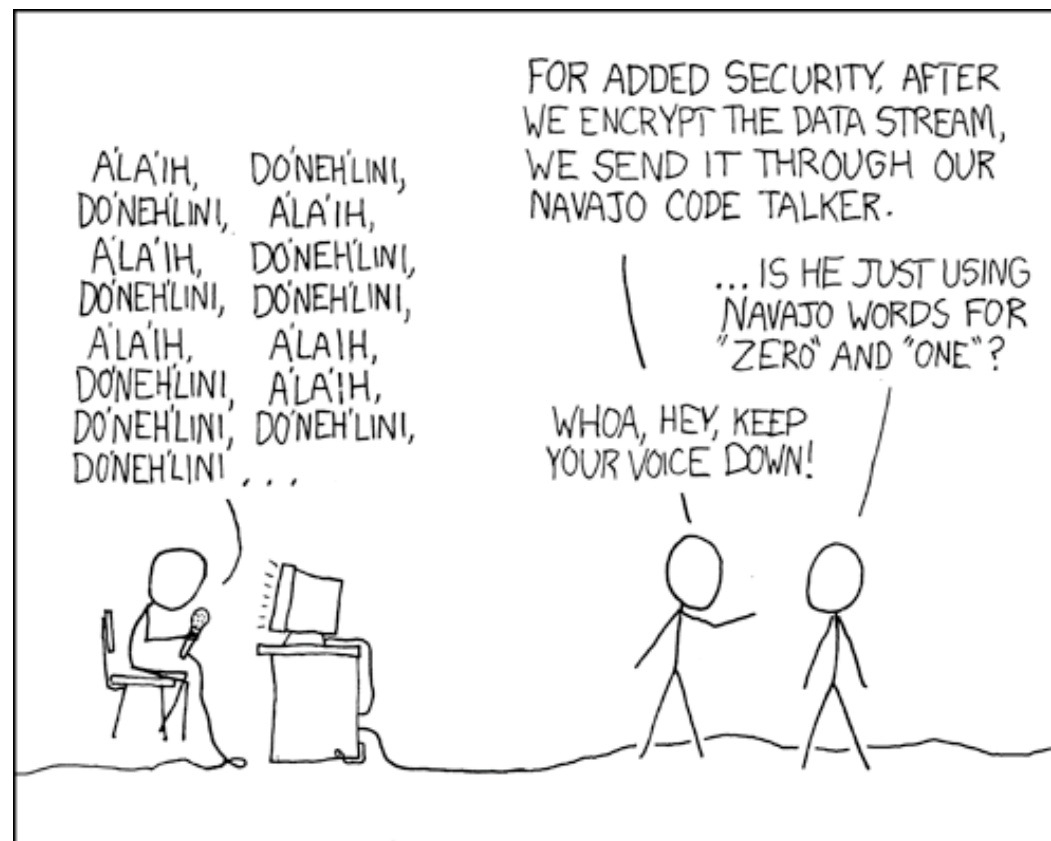

<http://xkcd.com/257/>

Administrivia

- ❖ Lab 1 has been released
 - Based on material from today's and Friday's lecture
- ❖ Section 2 tomorrow
 - New rooms for AC/AG (EEB 003) and BC (GUG 218)
 - Good preparation for Lab 1
- ❖ Make good use of office hours!
 - Can go to *any* office hours for *any* TA

Memory, Data, and Addressing

- ❖ Representing information as bits and bytes
- ❖ Organizing and addressing data in memory
- ❖ Manipulating data in memory using C
- ❖ Boolean algebra and bit-level manipulations

Boolean Algebra

- ❖ Developed by George Boole in 19th Century
 - Algebraic representation of logic (True \rightarrow 1, False \rightarrow 0)
 - AND: $A \& B = 1$ when both A is 1 and B is 1
 - OR: $A | B = 1$ when either A is 1 or B is 1
 - XOR: $A \wedge B = 1$ when either A is 1 or B is 1, but not both
 - NOT: $\sim A = 1$ when A is 0 and vice-versa
 - DeMorgan's Law:
 - $\sim (A | B) = \sim A \& \sim B$
 - $\sim (A \& B) = \sim A | \sim B$

AND			OR			XOR			NOT	
&	0	1		0	1	^	0	1	~	
0	0	0	0	0	1	0	0	1	0	1
1	0	1	1	1	1	1	1	0	1	0

General Boolean Algebras

- ❖ Operate on bit vectors
 - Operations applied bitwise
 - All of the properties of Boolean algebra apply

01101001	01101001	01101001	01101001
& 01010101	01010101	^ 01010101	~ 01010101
01000001	01111101	00111100	10101010

- ❖ Examples of useful operations:

$$x \wedge x = 0$$

$$x | 1 = 1$$

01010101	01010101
^ 01010101	11110000
00000000	11110101

- ❖ How does this relate to set operations?

Representing & Manipulating Sets

❖ Representation

- A w -bit vector represents subsets of $\{0, \dots, w-1\}$

- $a_j = 1$ iff $j \in A$

01101001 { 0, 3, 5, 6 }

76543210

01010101 { 0, 2, 4, 6 }

76543210

❖ Operations

- $\&$ Intersection 01000001 { 0, 6 }
- $|$ Union 01111101 { 0, 2, 3, 4, 5, 6 }
- \wedge Symmetric difference 00111100 { 2, 3, 4, 5 }
- \sim Complement 10101010 { 1, 3, 5, 7 }

Bit-Level Operations in C

❖ $\&$ (AND), $|$ (OR), \wedge (XOR), \sim (NOT)

- View arguments as bit vectors, apply operations bitwise
- Apply to any “integral” data type
 - long, int, short, char, unsigned

❖ Examples with char a , b , c ;

- $a = (\text{char})\ 0x41;$ // $0x41 \rightarrow 0b\ 0100\ 0001$
 $b = \sim a;$ // $0b\ 1011\ 1110 \rightarrow 0xBE$
- $a = (\text{char})\ 0x69;$ // $0x69 \rightarrow 0b\ 0110\ 1001$
 $b = (\text{char})\ 0x55;$ // $0x55 \rightarrow 0b\ 0101\ 0101$
 $c = a \ \&\ b;$ // $0b\ 0100\ 0001 \rightarrow 0x41$
- $a = (\text{char})\ 0x41;$ // $0x41 \rightarrow 0b\ 0100\ 0001$
 $b = a;$ // $0b\ 0100\ 0001$
 $c = a \ \wedge\ b;$ // $0b\ 0000\ 0000 \rightarrow 0x00$

Contrast: Logic Operations

- ❖ Logical operators in C: `&&` (AND), `||` (OR), `!` (NOT)
 - `0` is False, anything nonzero is True
 - Always return 0 or 1
 - **Early termination** (a.k.a. short-circuit evaluation) of `&&`, `||`
- ❖ Examples (char data type)
 - `!0x41 -> 0x00`
 - `!0x00 -> 0x01`
 - `!!0x41 -> 0x01`
 - `p && *p++`
 - Avoids **null pointer** (0x0) access via *early termination*
 - Short for: `if (p) { *p++; }`
 - `0xCC && 0x33 -> 0x01`
 - `0x00 || 0x33 -> 0x01`

Roadmap

C:

```
car *c = malloc(sizeof(car));
c->miles = 100;
c->gals = 17;
float mpg = get_mpg(c);
free(c);
```

Java:

```
Car c = new Car();
c.setMiles(100);
c.setGals(17);
float mpg =
    c.getMPG();
```


Assembly language:

```
get_mpg:
    pushq    %rbp
    movq    %rsp, %rbp
    ...
    popq    %rbp
    ret
```

Machine code:

```
0111010000011000
100011010000010000000010
1000100111000010
110000011111101000011111
```

Computer system:

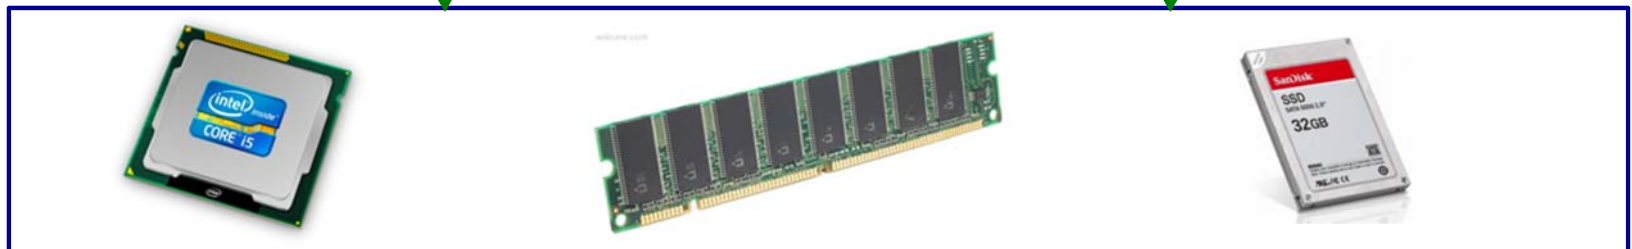


- Memory & data
- Integers & floats**
- Machine code & C
- x86 assembly
- Procedures & stacks
- Arrays & structs
- Memory & caches
- Processes
- Virtual memory
- Memory allocation
- Java vs. C

OS:



But before we get to integers....

- ❖ Encode a standard deck of playing cards
- ❖ 52 cards in 4 suits
 - How do we encode suits, face cards?
- ❖ What operations do we want to make easy to implement?
 - Which is the higher value card?
 - Are they the same suit?

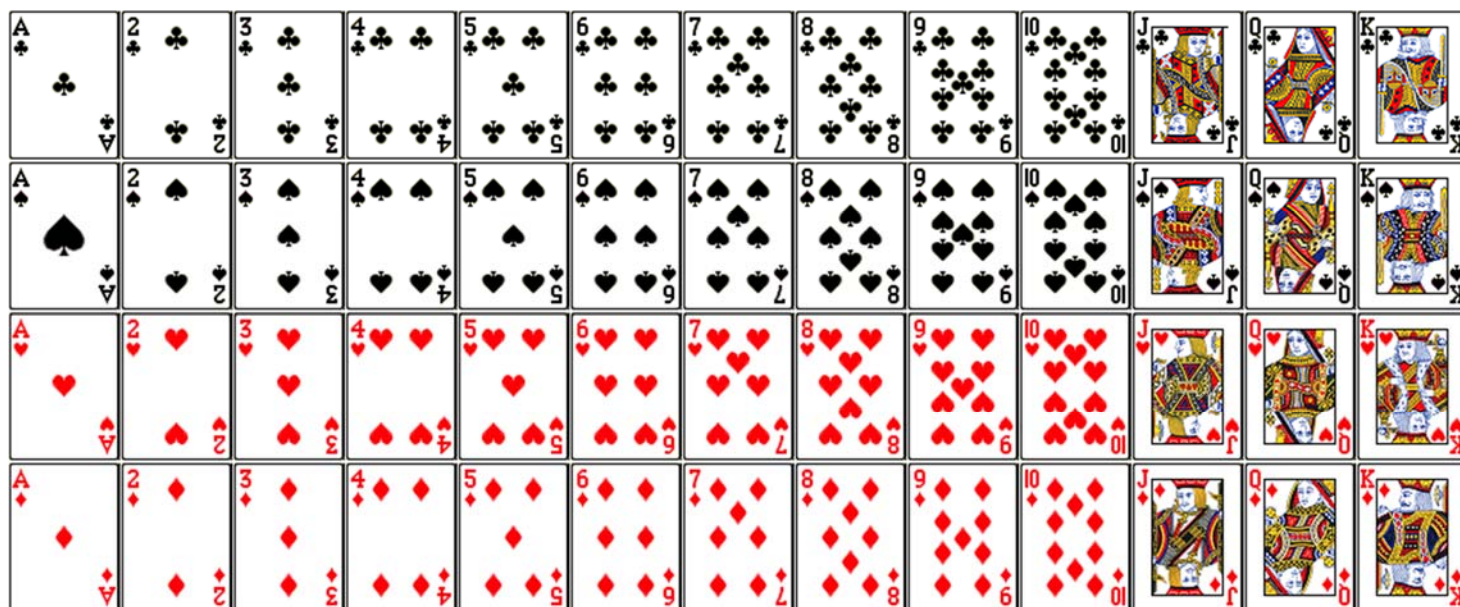

Two possible representations

1) 1 bit per card (52): bit corresponding to card set to 1



low-order 52 bits of 64-bit word

- “One-hot” encoding (similar to set notation)
- Drawbacks:
 - Hard to compare values and suits
 - Large number of bits required

2) 1 bit per suit (4), 1 bit per number (13): 2 bits set



4 suits 13 numbers


- Pair of one-hot encoded values
- Easier to compare suits and values, but still lots of bits used

❖ Can we do better?

Two better representations

3) Binary encoding of all 52 cards – only 6 bits needed

- $2^6 = 64 \geq 52$



low-order 6 bits of a byte

- Fits in one byte (smaller than one-hot encodings)
- How can we make value and suit comparisons easier?

4) Separate binary encodings of suit (2 bits) and value (4 bits)



suit value

- Also fits in one byte, and easy to do comparisons

K	Q	J	...	3	2	A
1101	1100	1011	...	0011	0010	0001

♣	00
♦	01
♥	10
♠	11

Compare Card Suits

mask: a bit vector designed to achieve a desired behavior when used with a bitwise operator on another bit vector v .
Here we turns all *but* the bits of interest in v to 0.


```
char hand[5];           // represents a 5-card hand
char card1, card2;     // two cards to compare
card1 = hand[0];
card2 = hand[1];
...
if ( sameSuitP(card1, card2) ) { ... }
```

```
#define SUIT_MASK 0x30

int sameSuitP(char card1, char card2) {
    return (!((card1 & SUIT_MASK) ^ (card2 & SUIT_MASK)));
    //return (card1 & SUIT_MASK) == (card2 & SUIT_MASK);
}
```

returns int

SUIT_MASK = 0x30 =

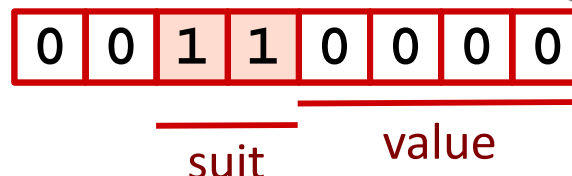


equivalent

Compare Card Suits

mask: a bit vector designed to achieve a desired behavior when used with a bitwise operator on another bit vector v .
Here we turns all *but* the bits of interest in v to 0.

```
#define SUIT_MASK 0x30

int sameSuitP(char card1, char card2) {
    return (!(card1 & SUIT_MASK) ^ (card2 & SUIT_MASK));
    //return (card1 & SUIT_MASK) == (card2 & SUIT_MASK);
}
```

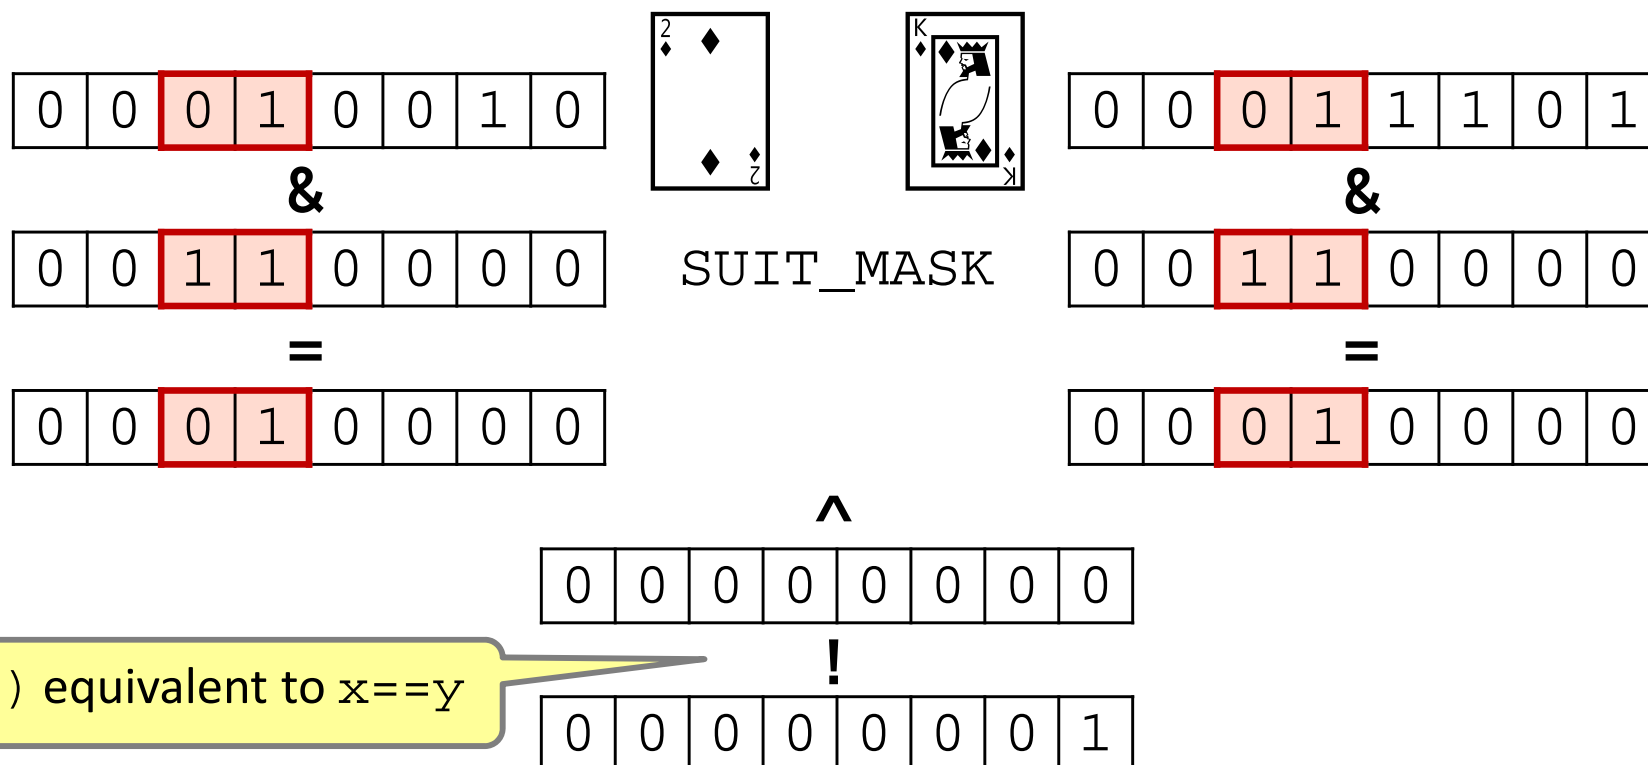

! (x^y) equivalent to x==y

Compare Card Values

mask: a bit vector designed to achieve a desired behavior when used with a bitwise operator on another bit vector v .

```
char hand[5];           // represents a 5-card hand
char card1, card2;     // two cards to compare
card1 = hand[0];
card2 = hand[1];
...
if ( greaterValue(card1, card2) ) { ... }
```

```
#define VALUE_MASK  0x0F

int greaterValue(char card1, char card2) {
    return ((unsigned int)(card1 & VALUE_MASK) >
           (unsigned int)(card2 & VALUE_MASK));
}
```

VALUE_MASK = 0x0F =

0	0	0	0	1	1	1	1
---	---	---	---	---	---	---	---


suit value

Compare Card Values

mask: a bit vector designed to achieve a desired behavior when used with a bitwise operator on another bit vector v .

```
#define VALUE_MASK 0x0F

int greaterValue(char card1, char card2) {
    return ((unsigned int)(card1 & VALUE_MASK) >
            (unsigned int)(card2 & VALUE_MASK));
}
```

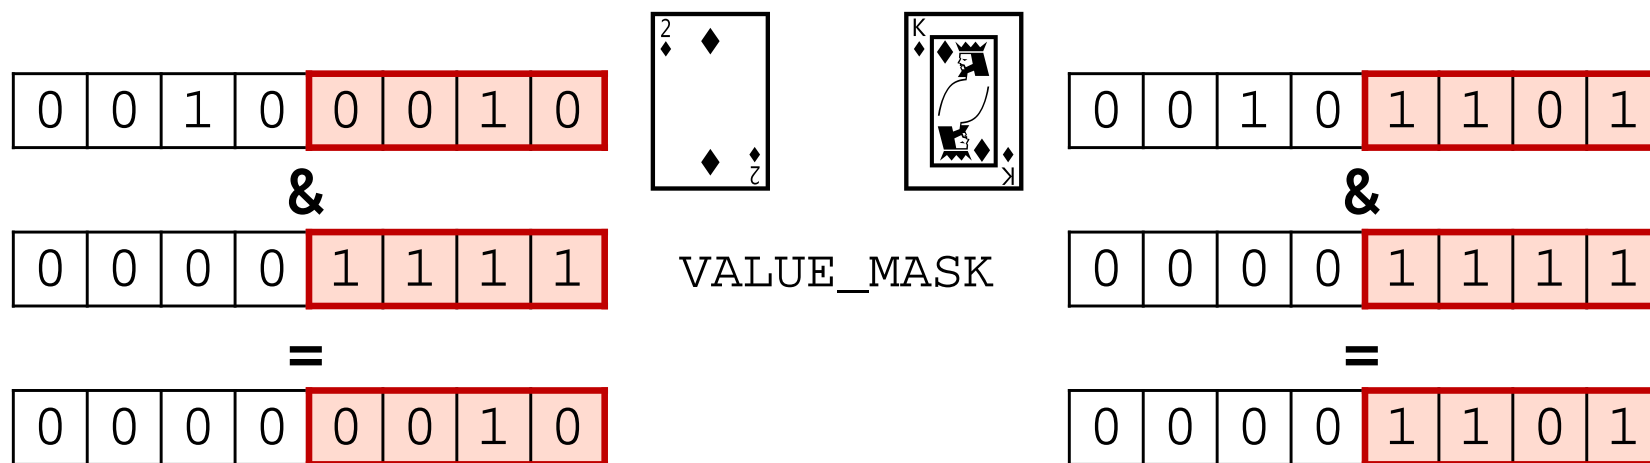

$2_{10} > 13_{10}$


0 (false)

Integers

- ❖ Representation of integers: unsigned and signed
- ❖ Casting
- ❖ Arithmetic and shifting
- ❖ Sign extension

Encoding Integers

- ❖ The hardware (and C) supports two flavors of integers
 - *unsigned* – only the non-negatives
 - *signed* – both negatives and non-negatives
- ❖ Cannot represent all integers with w bits (only 2^w)
 - Only 2^w distinct bit patterns
 - Unsigned values: $0 \dots 2^w - 1$
 - Signed values: $-2^{w-1} \dots 2^{w-1} - 1$
- ❖ **Example:** 8-bit integers (i.e., char)

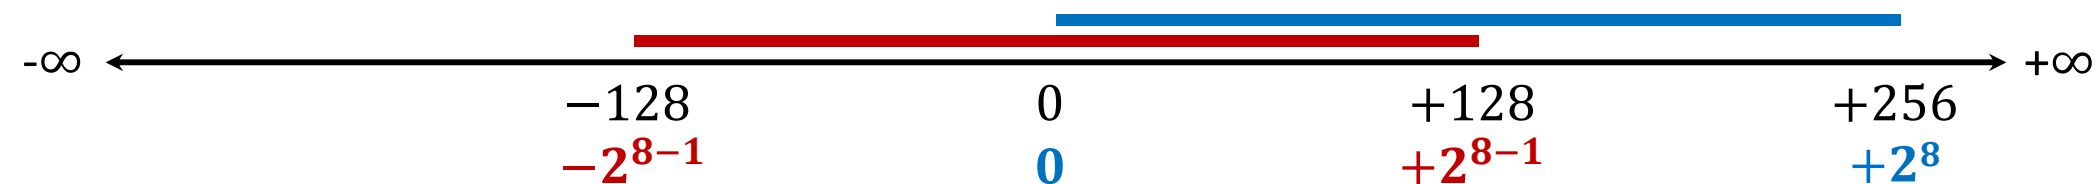

Unsigned Integers

- ❖ Unsigned values follow the standard base 2 system
 - $b_7b_6b_5b_4b_3b_2b_1b_0 = b_72^7 + b_62^6 + \dots + b_12^1 + b_02^0$
- ❖ Add and subtract using the normal “carry” and “borrow” rules, just in binary

$\begin{array}{r} 63 \\ + 8 \\ \hline 71 \end{array}$	$\begin{array}{r} 00111111 \\ + 00001000 \\ \hline 01000111 \end{array}$
---	--

- ❖ Useful formula: $2^{N-1} + 2^{N-2} + 4 + 2 + 1 = 2^N - 1$
 - i.e., N 1's in a row = $2^N - 1$
- ❖ How would you make *signed* integers?



Sign and Magnitude

Most Significant Bit

- ❖ Designate the high-order bit (MSB) as the “sign bit”
 - $sign=0$: positive numbers; $sign=1$: negative numbers
- ❖ Positives:
 - Using MSB as sign bit matches positive numbers with unsigned
 - All zeros encoding is still = 0
- ❖ Examples (8 bits):
 - $0x00 = 00000000_2$ is non-negative, because the sign bit is 0
 - $0x7F = 01111111_2$ is non-negative ($+127_{10}$)
 - $0x85 = 10000101_2$ is negative (-5_{10})
 - $0x80 = 10000000_2$ is negative... zero???


Sign and Magnitude

- ❖ MSB is the sign bit, rest of the bits are magnitude
- ❖ Drawbacks?

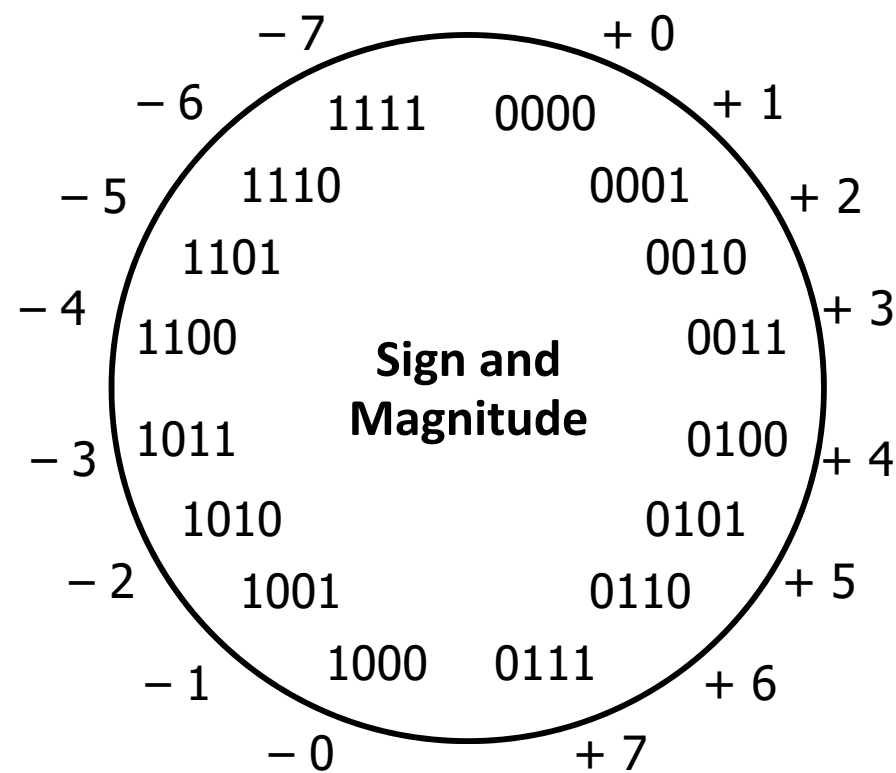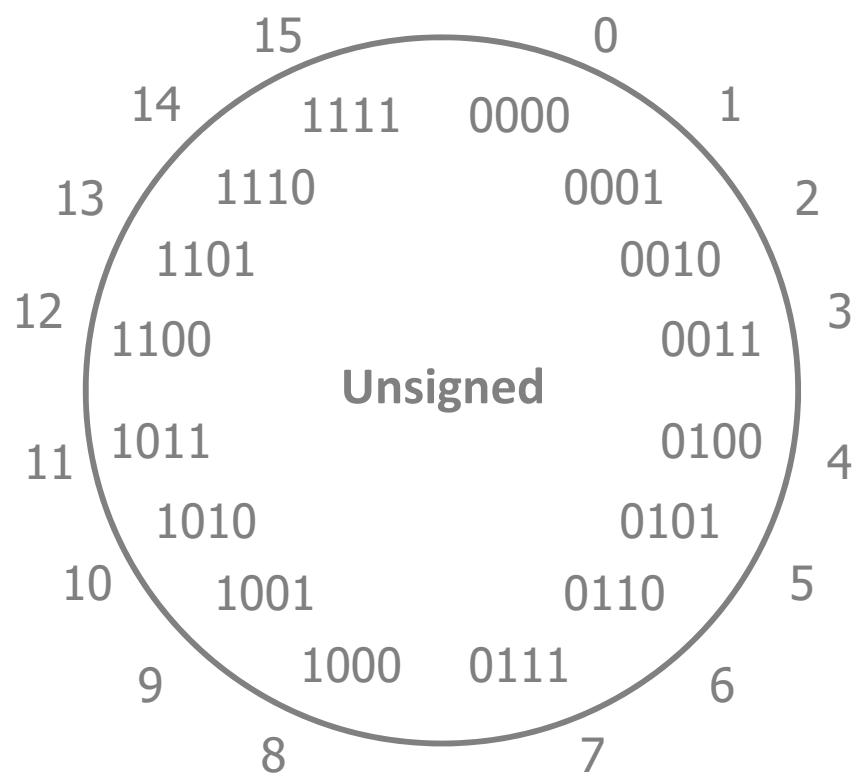

Sign and Magnitude

- ❖ MSB is the sign bit, rest of the bits are magnitude
- ❖ Drawbacks:
 - **Two representations of 0** (bad for checking equality)

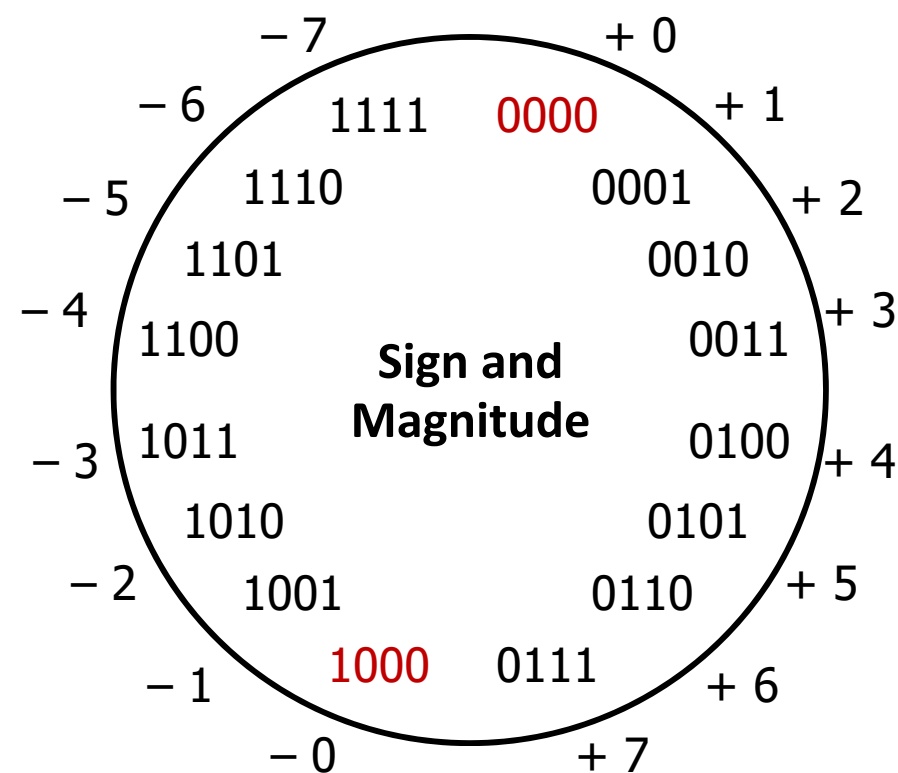

Sign and Magnitude

- ❖ MSB is the sign bit, rest of the bits are magnitude
- ❖ Drawbacks:
 - Two representations of 0 (bad for checking equality)
 - **Arithmetic is cumbersome**
 - Example: $4 - 3 \neq 4 + (-3)$


4	0100
<u>- 3</u>	<u>- 0011</u>
1	0001



4	0100
<u>+ -3</u>	<u>+ 1011</u>
-7	1111




- Negatives “increment” in wrong direction!

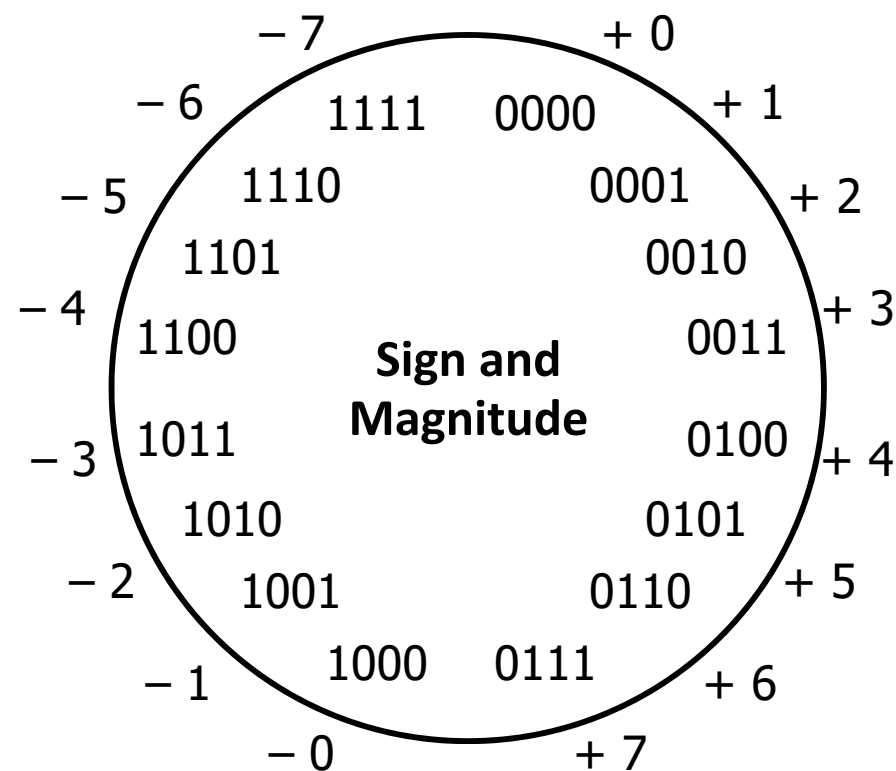

Two's Complement

❖ Let's fix these problems:

1) "Flip" negative encodings so incrementing works

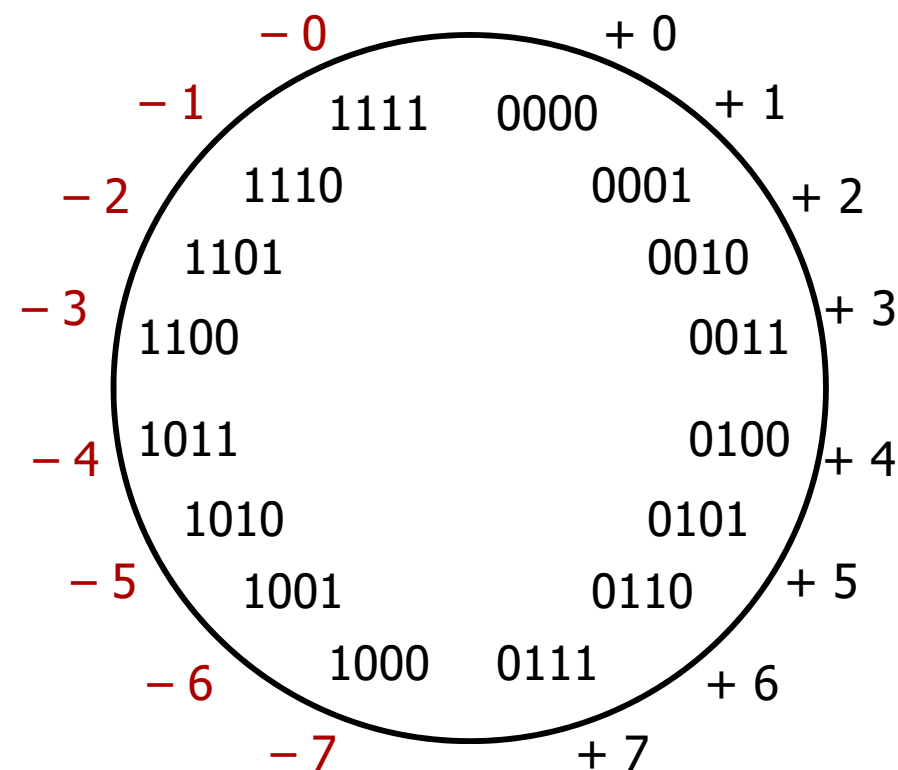


Two's Complement

❖ Let's fix these problems:

- 1) "Flip" negative encodings so incrementing works
- 2) "Shift" negative numbers to eliminate -0

❖ MSB *still* indicates sign!


- This is why we represent one more negative than positive number (-2^{N-1} to $2^{N-1}-1$)

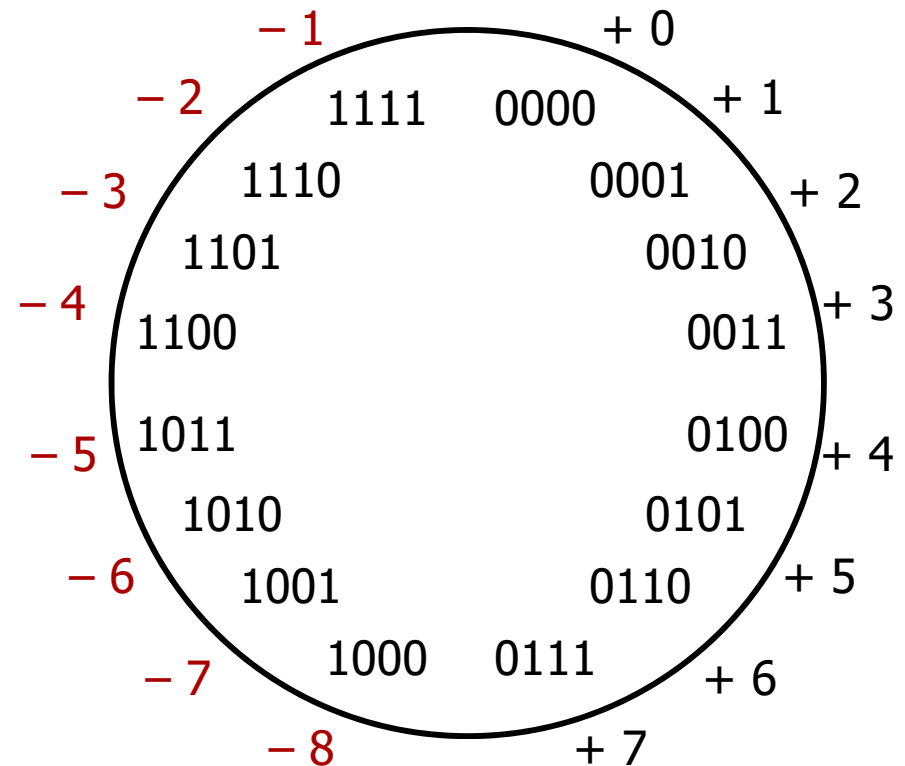

Two's Complement Negatives

❖ Accomplished with one neat mathematical trick!

b_{w-1} has weight -2^{w-1} , other bits have usual weights $+2^i$

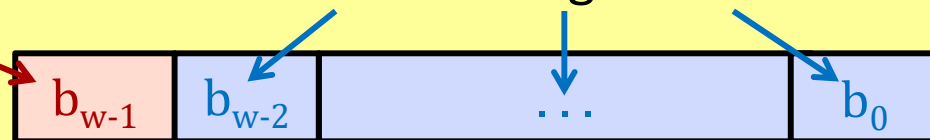


■ 4-bit Examples:

- 1010_2 unsigned:
 $1*2^3+0*2^2+1*2^1+0*2^0 = 10$
- 1010_2 two's complement:
 $-1*2^3+0*2^2+1*2^1+0*2^0 = -6$

■ -1 represented as:

$$1111_2 = -2^3 + (2^3 - 1)$$

- MSB makes it super negative, add up all the other bits to get back up to -1

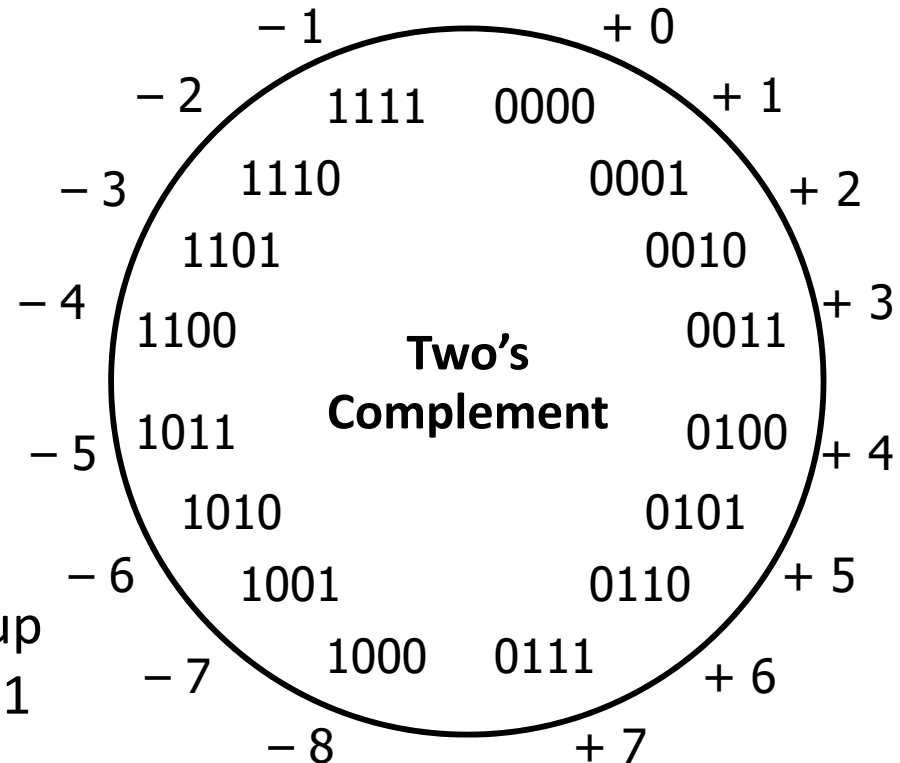


Why Two's Complement is So Great

- ❖ Roughly same number of (+) and (-) numbers
- ❖ Positive number encodings match unsigned
- ❖ Single zero
- ❖ All zeros encoding = 0

- ❖ Simple negation procedure:

- Get negative representation of any integer by taking bitwise complement and then adding one!

$$(\sim x + 1 == -x)$$

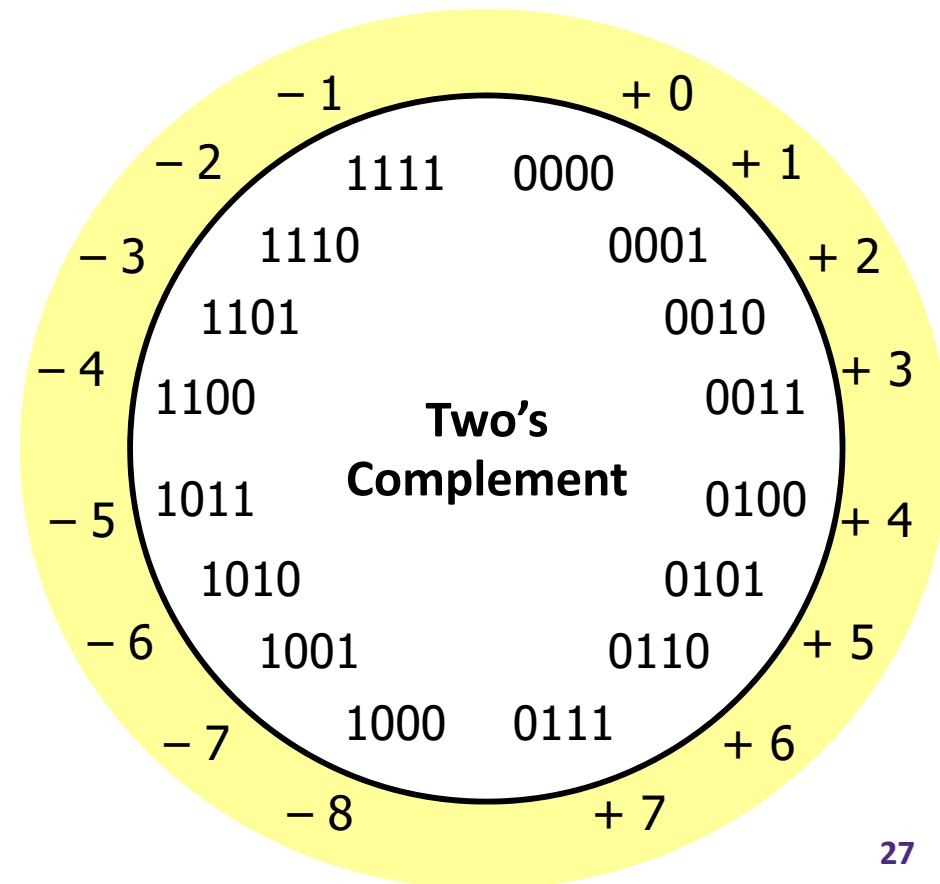

Peer Instruction Question

- ❖ Take the 4-bit number encoding $x = 0b1011$
- ❖ Which of the following numbers is NOT a valid interpretation of x using any of the number representation schemes discussed today?
 - Unsigned, Sign and Magnitude, Two's Complement
 - Vote at <http://PollEv.com/justinh>

(A) -4

(B) -5

(C) 11

(D) -3

Summary

- ❖ Bit-level operators allow for fine-grained manipulations of data
 - Bitwise AND ($\&$), OR ($|$), and NOT (\sim) different than logical AND ($\&\&$), OR ($| |$), and NOT ($!$)
 - Especially useful with bit masks
- ❖ Choice of *encoding scheme* is important
 - Tradeoffs based on size requirements and desired operations
- ❖ Integers represented using unsigned and two's complement representations
 - Limited by fixed bit width
 - We'll examine arithmetic operations next lecture