

Integers II

CSE 351 Spring 2020

Instructor:

Ruth Anderson

Teaching Assistants:

Alex Olshansky

Callum Walker

Chin Yeoh

Connie Wang

Diya Joy

Edan Sneh

Eddy (Tianyi) Zhou

Eric Fan

Jeffery Tian

Jonathan Chen


Joseph Schafer

Melissa Birchfield

Millicent Li

Porter Jones

Rehaan Bhimani

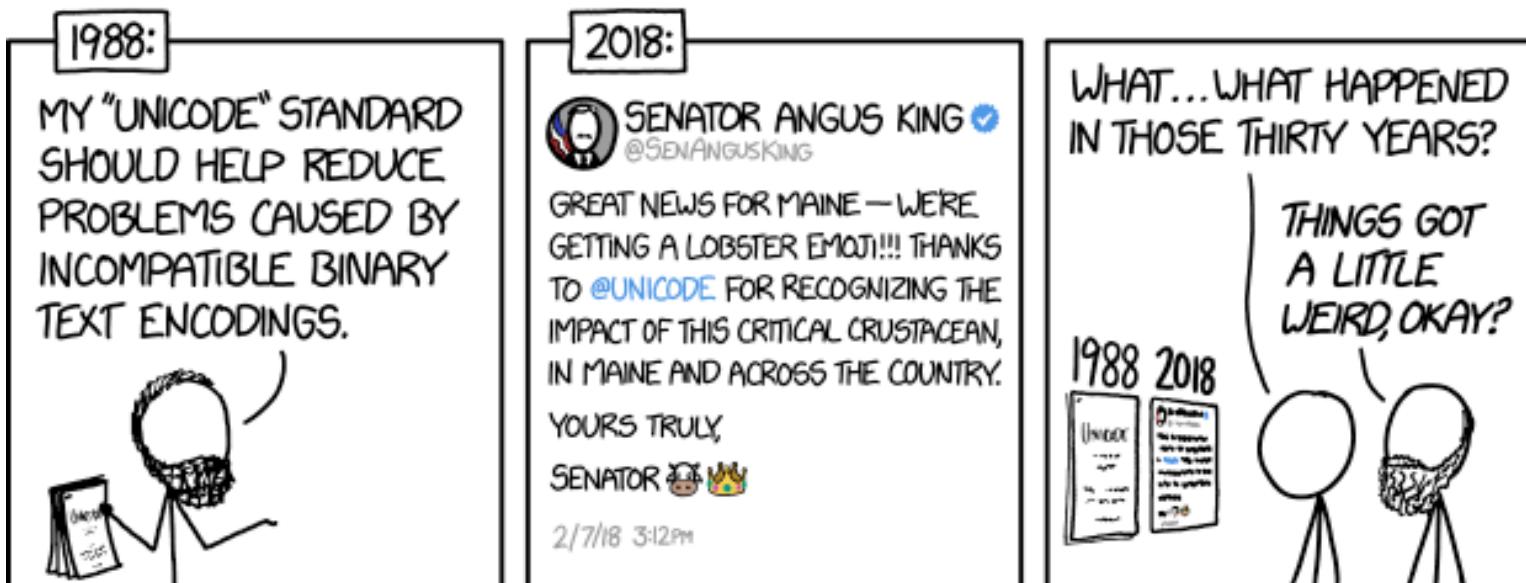

<http://xkcd.com/1953/>

Administrivia

- ❖ hw4 due Friday – 11am
- ❖ hw5 due Monday – 11am
- ❖ Lab 1a due Monday (4/13)
 - Submit `pointer.c` and `lab1Areflect.txt` to Gradescope
- ❖ Lab 1b coming soon, due 4/20
 - Bit puzzles on number representation
 - Can start after today's lecture, but floating point will be introduced next week
 - Section worksheet for tomorrow has helpful examples
 - Bonus slides at the end of today's lecture have relevant examples

Extra Credit

- ❖ All labs starting with Lab 1b have extra credit portions
 - These are meant to be fun extensions to the labs
- ❖ Extra credit points *don't* affect your lab grades
 - From the course policies: “they will be accumulated over the course and will be used to bump up borderline grades at the end of the quarter.”
 - Make sure you finish the rest of the lab before attempting any extra credit

Integers

- ❖ **Binary representation of integers**
 - Unsigned and signed
- ❖ Shifting and arithmetic operations – useful for Lab 1a
- ❖ In C: Signed, Unsigned and Casting
- ❖ Consequences of finite width representations
 - Overflow, sign extension

Two's Complement Arithmetic

- ❖ The same addition procedure works for both unsigned and two's complement integers
 - **Simplifies hardware:** only one algorithm for addition
 - **Algorithm:** simple addition, **discard the highest carry bit**
 - Called modular addition: result is sum *modulo* 2^w
- ❖ **4-bit Examples:**

HW	TC
0100 +0011	
=	

HW	TC
1100 +0011	
=	

HW	TC
0100 +1101	
=	

Why Does Two's Complement Work?

- ❖ For all representable positive integers x , we want:

$$\begin{array}{r} \textit{bit representation of } x \\ + \textit{bit representation of } -x \\ \hline 0 \end{array} \quad (\text{ignoring the carry-out bit})$$

- What are the 8-bit negative encodings for the following?

$$\begin{array}{r} 00000001 \\ + \text{????????} \\ \hline 00000000 \end{array}$$

$$\begin{array}{r} 00000010 \\ + \text{????????} \\ \hline 00000000 \end{array}$$

$$\begin{array}{r} 11000011 \\ + \text{????????} \\ \hline 00000000 \end{array}$$

Why Does Two's Complement Work?

- ❖ For all representable positive integers x , we want:

$$\begin{array}{r} \text{bit representation of } x \\ + \text{ bit representation of } -x \\ \hline 0 \end{array} \quad (\text{ignoring the carry-out bit})$$

- What are the 8-bit negative encodings for the following?

$$\begin{array}{r} 00000001 \\ + 11111111 \\ \hline 100000000 \end{array} \quad \begin{array}{r} 00000010 \\ + 11111110 \\ \hline 100000000 \end{array} \quad \begin{array}{r} 11000011 \\ + 00111101 \\ \hline 100000000 \end{array}$$


These are the bitwise complement plus 1!

$$-x == \sim x + 1$$

Signed/Unsigned Conversion Visualized

- ❖ Two's Complement → Unsigned

- Ordering Inversion
- Negative → Big Positive

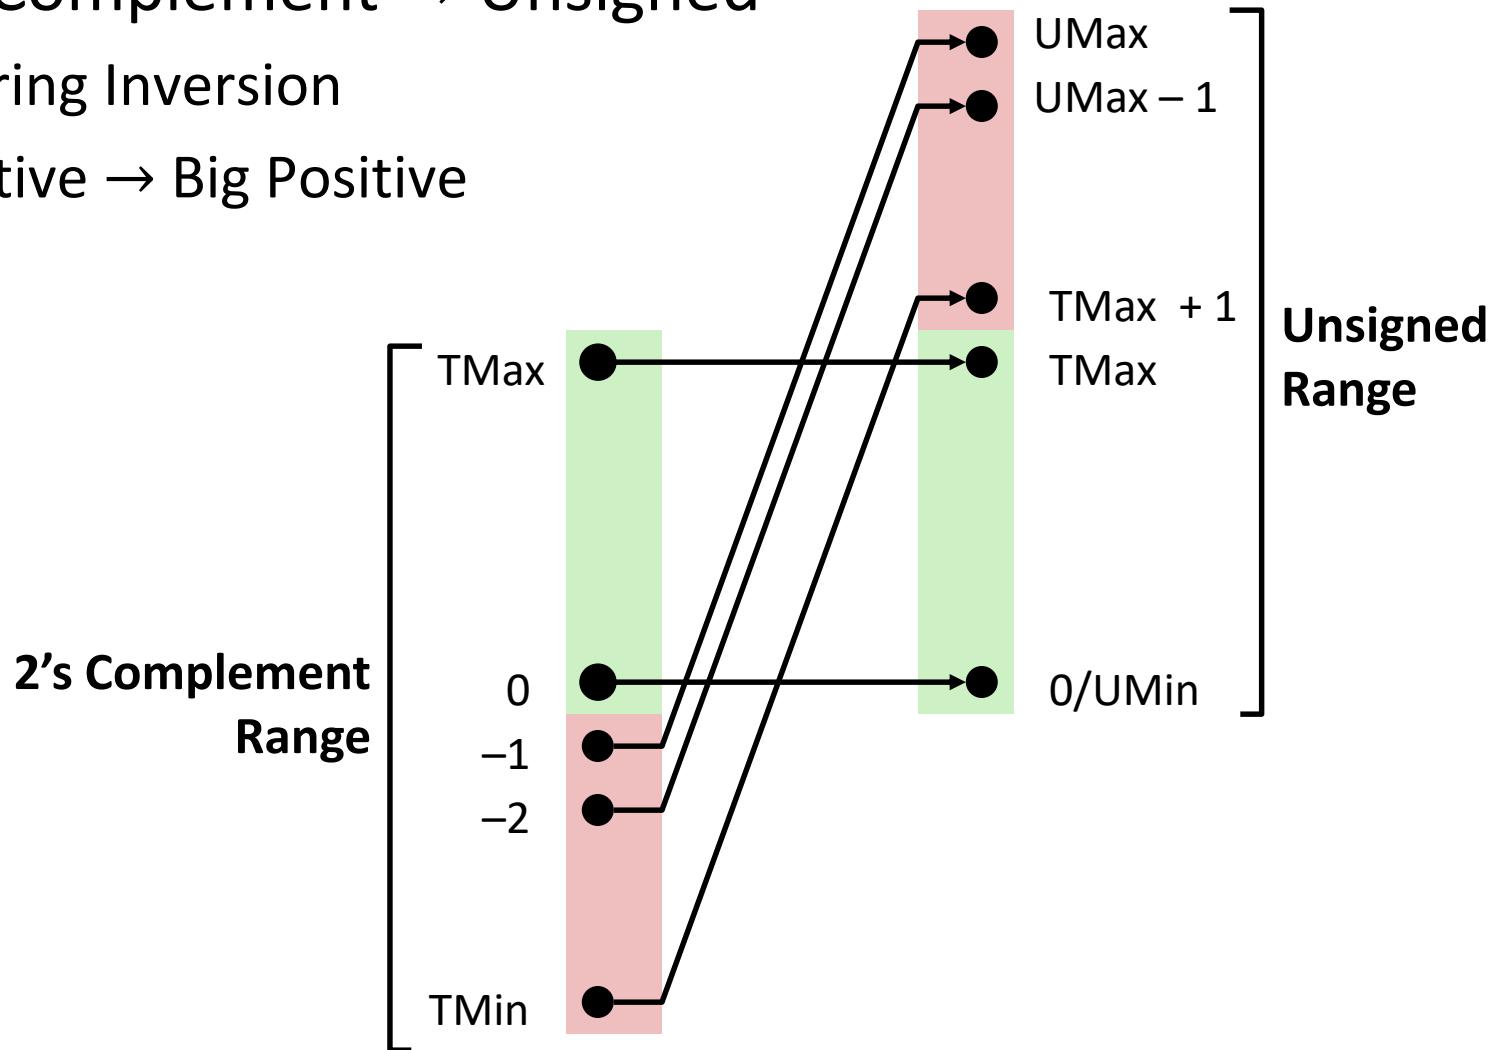

Values To Remember

❖ Unsigned Values

- UMin = 0b00...0
= 0
- UMax = 0b11...1
= $2^w - 1$

❖ Two's Complement Values

- TMin = 0b10...0
= -2^{w-1}
- Tmax = 0b01...1
= $2^{w-1} - 1$
- -1 = 0b11...1

❖ Example: Values for $w = 64$

	Decimal	Hex							
UMax	18,446,744,073,709,551,615	FF	FF	FF	FF	FF	FF	FF	FF
TMax	9,223,372,036,854,775,807	7F	FF						
TMin	-9,223,372,036,854,775,808	80	00	00	00	00	00	00	00
-1	-1	FF	FF	FF	FF	FF	FF	FF	FF
0	0	00	00	00	00	00	00	00	00

Integers

- ❖ Binary representation of integers
 - Unsigned and signed
- ❖ **Shifting and arithmetic operations** – useful for Lab 1a
- ❖ In C: Signed, Unsigned and Casting
- ❖ Consequences of finite width representations
 - Overflow, sign extension

Shift Operations

- ❖ Left shift ($x \ll n$) bit vector x by n positions
 - Throw away (drop) extra bits on left
 - Fill with 0s on right
- ❖ Right shift ($x \gg n$) bit-vector x by n positions
 - Throw away (drop) extra bits on right
 - Logical shift (for **unsigned** values)
 - Fill with 0s on left
 - Arithmetic shift (for **signed** values)
 - Replicate most significant bit on left
 - Maintains sign of x

Shift Operations

- ❖ Left shift ($x \ll n$)
 - Fill with 0s on right
- ❖ Right shift ($x \gg n$)
 - Logical shift (for **unsigned** values)
 - Fill with 0s on left
 - Arithmetic shift (for **signed** values)
 - Replicate most significant bit on left
- ❖ Notes:
 - Shifts by $n < 0$ or $n \geq w$ (w is bit width of x) are *undefined*
 - In C: behavior of \gg is determined by compiler
 - In gcc / C lang, depends on data type of x (signed/unsigned)
 - In Java: logical shift is \ggg and arithmetic shift is \gg

x	0010	0010
$x \ll 3$	0001	0 000
$x \gg 2$	00 00	1000
$x \gg 2$	00 00	1000

x	1010	0010
$x \ll 3$	0001	0 000
$x \gg 2$	00 10	1000
$x \gg 2$	11 10	1000

Shifting Arithmetic?

❖ What are the following computing?

■ $x \gg n$

- 0b 0100 $\gg 1 = 0b\ 0010$
- 0b 0100 $\gg 2 = 0b\ 0001$
- Divide by 2^n

■ $x \ll n$

- 0b 0001 $\ll 1 = 0b\ 0010$
- 0b 0001 $\ll 2 = 0b\ 0100$
- Multiply by 2^n

❖ Shifting is faster than general multiply and divide operations

Left Shifting Arithmetic 8-bit Example

- ❖ No difference in left shift operation for unsigned and signed numbers (just manipulates bits)
 - Difference comes during interpretation: $x * 2^n$?

		Signed	Unsigned
$x = 25;$	00011001	=	25 25
$L1=x<<2;$	$00011001\textcolor{red}{00}$	=	100 100
$L2=x<<3;$	$00011001\textcolor{red}{000}$	=	-56 200
$L3=x<<4;$	$00011001\textcolor{red}{0000}$	=	-112 144

Diagram illustrating bit manipulation:

- For $L1$, arrows show shifting the original 8-bit binary representation of 25 (00011001) two positions to the left, resulting in 100 (0001100100).
- For $L2$, arrows show shifting the original 8-bit binary representation of 25 (00011001) three positions to the left. The result is -56 (00011001000) in signed overflow. A yellow box highlights "signed overflow".
- For $L3$, arrows show shifting the original 8-bit binary representation of 25 (00011001) four positions to the left. The result is -112 (000110010000) in unsigned overflow. A yellow box highlights "unsigned overflow".

Right Shifting Arithmetic 8-bit Examples

- ❖ **Reminder:** C operator `>>` does *logical shift* on **unsigned** values and *arithmetic shift* on **signed** values
 - Logical Shift: $x/2^n?$

$xu = 240u; \quad 11110000 = 240$

$R1u=xu>>3; \quad 00011110000 = 30$

$R2u=xu>>5; \quad 000001110000 = 7$

rounding (down)

Right Shifting Arithmetic 8-bit Examples

- ❖ **Reminder:** C operator `>>` does *logical shift* on **unsigned** values and *arithmetic shift* on **signed** values
 - **Arithmetic Shift:** $x/2^n$?

$xs = -16; \quad 11110000 = -16$

$R1s=xu>>3; \quad 11111110000 = -2$

$R2s=xu>>5; \quad 111111110000 = -1$

rounding (down)

Integers

- ❖ Binary representation of integers
 - Unsigned and signed
- ❖ Shifting and arithmetic operations – useful for Lab 1a
- ❖ **In C: Signed, Unsigned and Casting**
- ❖ Consequences of finite width representations
 - Overflow, sign extension

In C: Signed vs. Unsigned

❖ Casting

- Bits are unchanged, just interpreted differently!
 - `int tx, ty;`
 - `unsigned int ux, uy;`
- *Explicit* casting
 - `tx = (int) ux;`
 - `uy = (unsigned int) ty;`
- *Implicit* casting can occur during assignments or function calls
 - `tx = ux;`
 - `uy = ty;`

Casting Surprises

!!!

- ❖ Integer literals (constants)
 - By default, integer constants are considered *signed* integers
 - Hex constants already have an explicit binary representation
 - Use “U” (or “u”) suffix to explicitly force *unsigned*
 - Examples: `0U, 4294967259u`
- ❖ Expression Evaluation
 - When you mixed unsigned and signed in a single expression, then **signed values are implicitly cast to unsigned**
 - Including comparison operators `<, >, ==, <=, >=`

Casting Surprises

!!!

❖ 32-bit examples:

- $TMin = -2,147,483,648, TMax = 2,147,483,647$

Left Constant	Order	Right Constant	Interpretation
0 0000 0000 0000 0000 0000 0000 0000		0U 0000 0000 0000 0000 0000 0000 0000	
-1 1111 1111 1111 1111 1111 1111 1111		0 0000 0000 0000 0000 0000 0000 0000	
-1 1111 1111 1111 1111 1111 1111 1111		0U 0000 0000 0000 0000 0000 0000 0000	
2147483647 0111 1111 1111 1111 1111 1111 1111		-2147483648 1000 0000 0000 0000 0000 0000 0000	
2147483647U 0111 1111 1111 1111 1111 1111 1111		-2147483648 1000 0000 0000 0000 0000 0000 0000	
-1 1111 1111 1111 1111 1111 1111 1111		-2 1111 1111 1111 1111 1111 1111 1110	
(unsigned) -1 1111 1111 1111 1111 1111 1111 1111		-2 1111 1111 1111 1111 1111 1111 1110	
2147483647 0111 1111 1111 1111 1111 1111 1111		2147483648U 1000 0000 0000 0000 0000 0000 0000	
2147483647 0111 1111 1111 1111 1111 1111 1111		(int) 2147483648U 1000 0000 0000 0000 0000 0000 0000	

Integers

- ❖ Binary representation of integers
 - Unsigned and signed
- ❖ Shifting and arithmetic operations – useful for Lab 1a
- ❖ In C: Signed, Unsigned and Casting
- ❖ **Consequences of finite width representations**
 - **Overflow, sign extension**

Arithmetic Overflow

Bits	Unsigned	Signed
0000	0	0
0001	1	1
0010	2	2
0011	3	3
0100	4	4
0101	5	5
0110	6	6
0111	7	7
1000	8	-8
1001	9	-7
1010	10	-6
1011	11	-5
1100	12	-4
1101	13	-3
1110	14	-2
1111	15	-1

- ❖ When a calculation produces a result that can't be represented in the current encoding scheme
 - Integer range limited by fixed width
 - Can occur in both the positive and negative directions
- ❖ C and Java ignore overflow exceptions
 - You end up with a bad value in your program and no warning/indication... oops!

Overflow: Unsigned

- ❖ **Addition:** drop carry bit (-2^N)


$$\begin{array}{r} 15 \\ + 2 \\ \hline \cancel{17} \\ 1 \end{array}$$

$$\begin{array}{r} 1111 \\ + 0010 \\ \hline \cancel{10001} \end{array}$$

- ❖ **Subtraction:** borrow ($+2^N$)

$$\begin{array}{r} 1 \\ - 2 \\ \hline \cancel{-1} \\ 15 \end{array}$$

$$\begin{array}{r} 10001 \\ - 0010 \\ \hline 1111 \end{array}$$

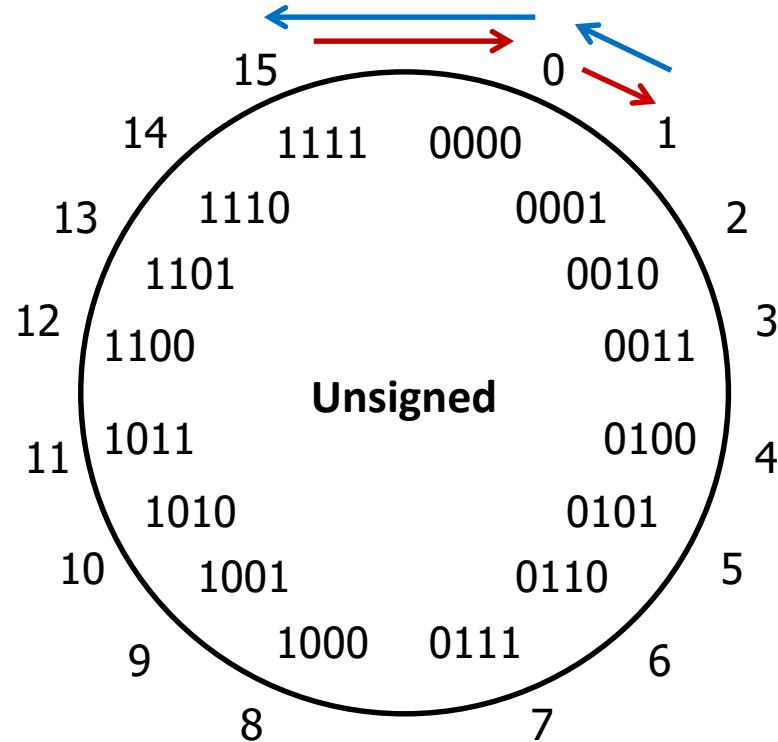

$\pm 2^N$ because of
modular arithmetic


Overflow: Two's Complement

- ❖ **Addition:** $(+) + (+) = (-)$ result?

$$\begin{array}{r} 6 \\ + 3 \\ \hline \cancel{9} \\ -7 \end{array} \qquad \begin{array}{r} 0110 \\ + 0011 \\ \hline 1001 \end{array}$$

- ❖ **Subtraction:** $(-) + (-) = (+)?$

$$\begin{array}{r} -7 \\ - 3 \\ \hline -10 \\ 6 \end{array} \qquad \begin{array}{r} 1001 \\ - 0011 \\ \hline 0110 \end{array}$$

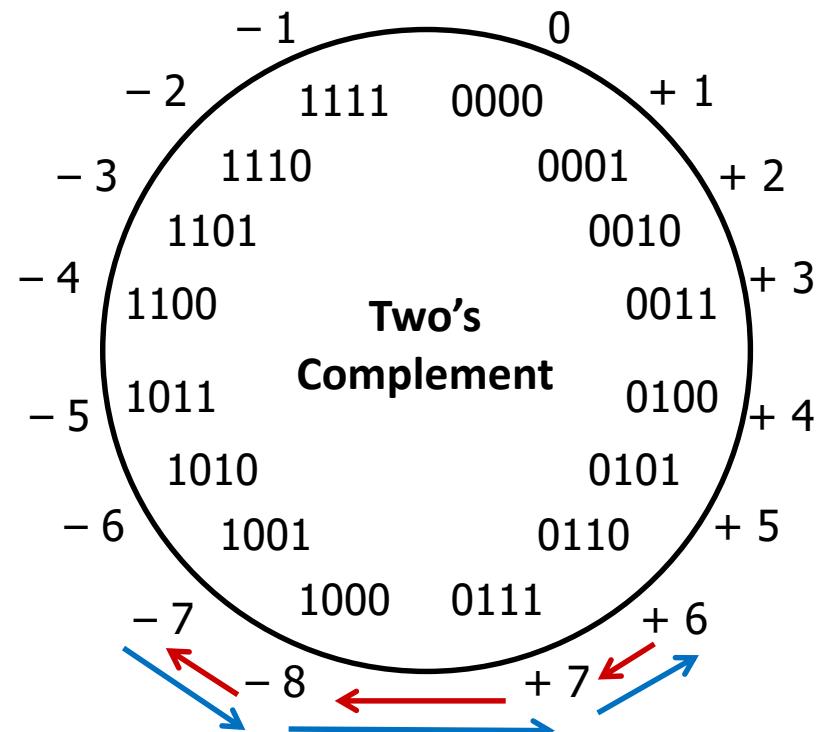

For signed: overflow if operands have same sign and result's sign is different

Sign Extension

- ❖ What happens if you convert a *signed* integral data type to a larger one?
 - e.g. `char` → `short` → `int` → `long`
- ❖ **4-bit → 8-bit Example:**
 - Positive Case **4-bit:** 0010 = +2
 - ✓ • Add 0's? **8-bit:** 00000010 = +2
 - Negative Case?

Polling Question [Int II - a]


- ❖ Which of the following 8-bit numbers has the same *signed* value as the 4-bit number **0b1100**?
 - Underlined digit = MSB
 - Vote at http://pollev.com/reaction?question_id=1&poll_id=1&choice_id=1

- A. 0b 0000 1100
- B. 0b 1000 1100
- C. 0b 1111 1100
- D. 0b 1100 1100
- E. We're lost...

Sign Extension

- ❖ **Task:** Given a w -bit signed integer X , convert it to $w+k$ -bit signed integer X' *with the same value*
- ❖ **Rule:** Add k copies of sign bit

- Let x_i be the i -th digit of X in binary
- $X' = \underbrace{x_{w-1}, \dots, x_{w-1}}_{k \text{ copies of MSB}}, \underbrace{x_{w-1}, x_{w-2}, \dots, x_1, x_0}_{\text{original } X}$

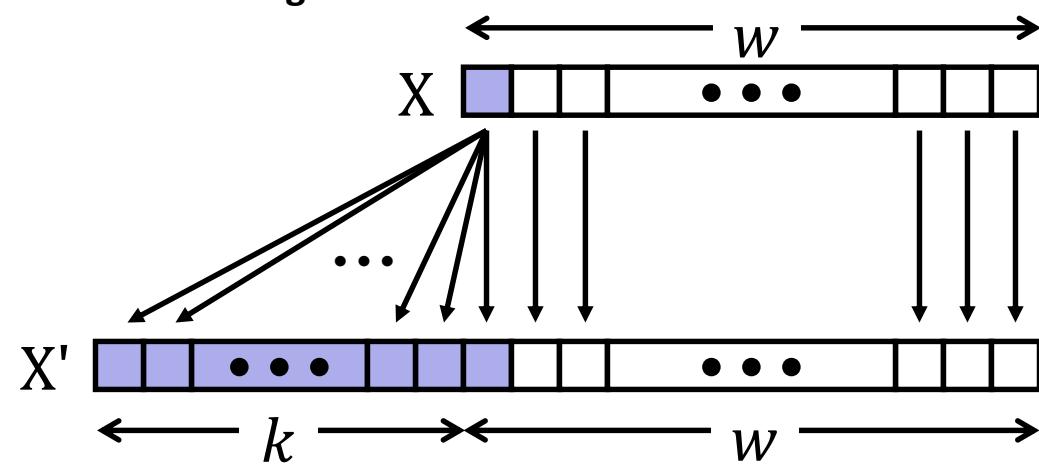

Sign Extension Example

- ❖ Convert from smaller to larger integral data types
- ❖ C automatically performs sign extension
 - Java too

```
short int x = 12345;
int ix = (int) x;
short int y = -12345;
int iy = (int) y;
```

Var	Decimal	Hex	Binary			
x	12345	30 39		00110000	00111001	
ix	12345	00 00 30 39	00000000	00000000	00110000	00111001
y	-12345		C7	CF	11001111	11000111
iy	-12345	FF FF CF C7	11111111	11111111	11001111	11000111

Summary

- ❖ Sign and unsigned variables in C
 - Bit pattern remains the same, just *interpreted* differently
 - Strange things can happen with our arithmetic when we convert/cast between sign and unsigned numbers
 - Type of variables affects behavior of operators (shifting, comparison)
- ❖ We can only represent so many numbers in w bits
 - When we exceed the limits, *arithmetic overflow* occurs
 - *Sign extension* tries to preserve value when expanding
- ❖ Shifting is a useful bitwise operator
 - Right shifting can be arithmetic (sign) or logical (0)
 - Can be used in multiplication with constant or bit masking

Practice Question

For the following expressions, find a value of **signed char** x , if there exists one, that makes the expression TRUE. Compare with your neighbor(s)!

- ❖ Assume we are using 8-bit arithmetic:

- $\blacksquare x == (\text{unsigned char}) x$

Example:

All solutions:

- $\blacksquare x \geq 128U$

- $\blacksquare x != (x >> 2) << 2$

- $\blacksquare x == -x$

- Hint: there are two solutions

- $\blacksquare (x < 128U) \&\& (x > 0x3F)$

BONUS SLIDES

Some examples of using shift operators in combination with bitmasks, which you may find helpful for Lab 1.

- ❖ Extract the 2nd most significant byte of an `int`
- ❖ Extract the sign bit of a signed `int`
- ❖ Conditionals as Boolean expressions

Using Shifts and Masks

- ❖ Extract the 2nd most significant *byte* of an int:
 - First shift, then mask: $(x \gg 16) \& 0xFF$

x	00000001 00000010 00000011 00000100
x>>16	00000000 00000000 00000001 00000010
0xFF	00000000 00000000 00000000 11111111
(x>>16) & 0xFF	00000000 00000000 00000000 00000010

- Or first mask, then shift: $(x \& 0xFF0000) \gg 16$

x	00000001 00000010 00000011 00000100
0xFF0000	00000000 11111111 00000000 00000000
x & 0xFF0000	00000000 00000010 00000000 00000000
(x&0xFF0000)>>16	00000000 00000000 00000000 00000010

Using Shifts and Masks

- ❖ Extract the *sign bit* of a signed int:
 - First shift, then mask: $(x \gg 31) \& 0x1$
 - Assuming arithmetic shift here, but this works in either case
 - Need mask to clear 1s possibly shifted in

x	00000001 00000010 00000011 00000100
x>>31	00000000 00000000 00000000 00000000 → 0
0x1	00000000 00000000 00000000 00000001
(x>>31) & 0x1	00000000 00000000 00000000 00000000

x	10000001 00000010 00000011 00000100
x>>31	11111111 11111111 11111111 11111111 → 1
0x1	00000000 00000000 00000000 00000001
(x>>31) & 0x1	00000000 00000000 00000000 00000001

Using Shifts and Masks

❖ Conditionals as Boolean expressions

- For `int x`, what does `(x<<31)>>31` do?

<code>x=!!123</code>	00000000 00000000 00000000 00000000 1
<code>x<<31</code>	10000000 00000000 00000000 00000000
<code>(x<<31)>>31</code>	11111111 11111111 11111111 11111111
<code>!x</code>	00000000 00000000 00000000 00000000 0
<code>!x<<31</code>	00000000 00000000 00000000 00000000
<code>(!x<<31)>>31</code>	00000000 00000000 00000000 00000000

- Can use in place of conditional:
 - In C: `if (x) {a=y;} else {a=z;}` equivalent to `a=x?y:z;`
 - `a=((x<<31)>>31)&y | (((!x<<31)>>31)&z);`