

# Integers II

CSE 351 Winter 2021

**Instructor:**

Mark Wyse

**Teaching Assistants:**

Kyrie Dowling

Catherine Guevara

Ian Hsiao


Jim Limprasert

Armin Magness

Allie Pflieger

Cosmo Wang

Ronald Widjaja

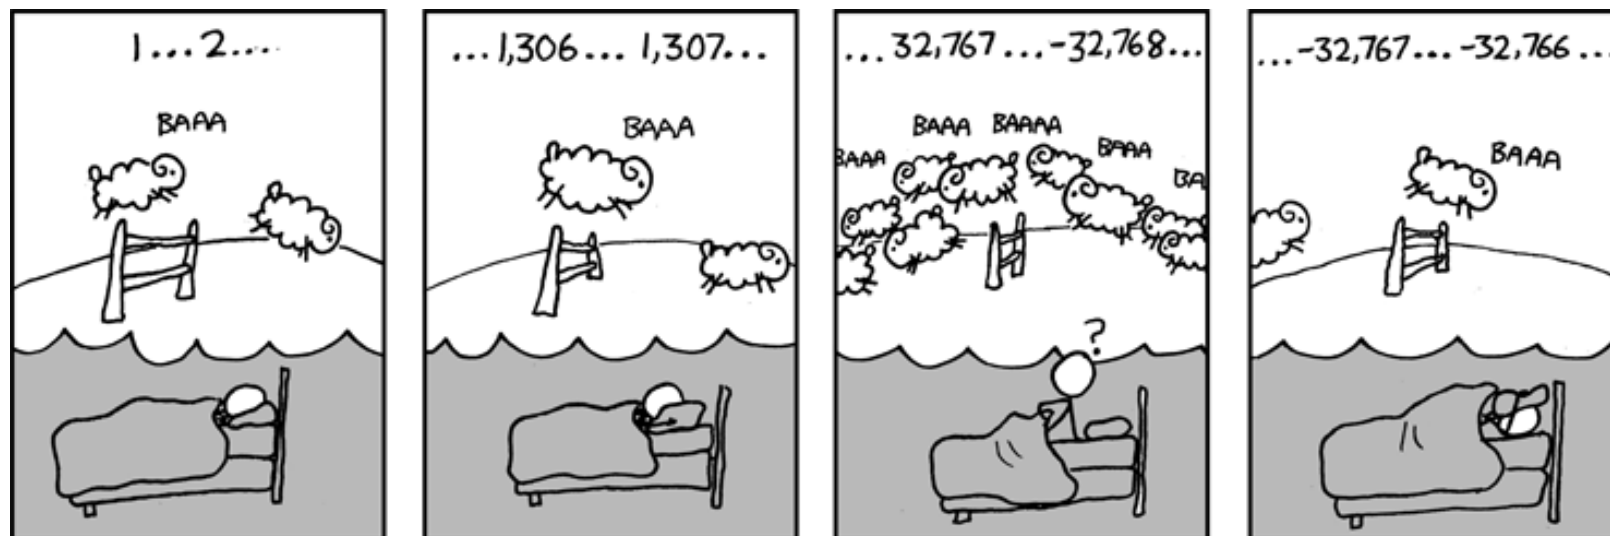

<http://xkcd.com/571/>

# Administrivia

- ❖ hw4 due 1/15, hw5 due 1/20
- ❖ Lab 1a due Friday 1/15
  - Submit `pointer.c` and `lab1Areflect.txt` to Gradescope
- ❖ Lab 1b released Friday, due 1/22
  - Bit manipulation on a custom number representation
  - Bonus slides at the end of today's lecture have relevant examples

# Runnable Code Snippets on Ed

- ❖ Ed allows you to embed runnable code snippets (*e.g.*, readings, homework, discussion)
  - These are *editable* and *rerunnable*!
  - Hide compiler warnings, but will show compiler errors and runtime errors
- ❖ Suggested use
  - Good for experimental questions about basic behaviors in C
  - *NOT* entirely consistent with the CSE Linux environment, so should not be used for any lab-related work

# Reading Review

- ❖ Terminology:
  - UMin, UMax, TMin, TMax
  - Type casting: implicit vs. explicit
  - Integer extension: zero extension vs. sign extension
  - Modular arithmetic and arithmetic overflow
  - Bit shifting: left shift, logical right shift, arithmetic right shift
  
- ❖ Questions from the Reading?

# Review Questions

- ❖ What is the value (and encoding) of **TMin** for a fictional 6-bit wide integer data type?
- ❖ For unsigned char `uc = 0xA1;`, what are the produced data for the cast **(short)uc**?
- ❖ What is the result of the following expressions?
  - **(signed char)uc >> 2**
  - **(unsigned char)uc >> 3**

# Why Does Two's Complement Work?

- ❖ For all representable positive integers  $x$ , we want:

$$\frac{\begin{array}{l} \textit{bit representation of } x \\ + \textit{ bit representation of } -x \end{array}}{\quad} 0 \quad (\text{ignoring the carry-out bit})$$

- What are the 8-bit negative encodings for the following?

$$\begin{array}{r} 00000001 \\ + \text{????????} \\ \hline 00000000 \end{array}$$

$$\begin{array}{r} 00000010 \\ + \text{????????} \\ \hline 00000000 \end{array}$$

$$\begin{array}{r} 11000011 \\ + \text{????????} \\ \hline 00000000 \end{array}$$

# Why Does Two's Complement Work?

- ❖ For all representable positive integers  $x$ , we want:

$$\frac{\text{bit representation of } x \\ + \text{bit representation of } -x}{0} \quad (\text{ignoring the carry-out bit})$$

- What are the 8-bit negative encodings for the following?

$$\begin{array}{r} 00000001 \\ + 11111111 \\ \hline 100000000 \end{array}$$

$$\begin{array}{r} 00000010 \\ + 11111110 \\ \hline 100000000 \end{array}$$

$$\begin{array}{r} 11000011 \\ + 00111101 \\ \hline 100000000 \end{array}$$

These are the bitwise complement plus 1!

$$-x == \sim x + 1$$

# Integers


- ❖ **Binary representation of integers**
  - Unsigned and signed
  - Casting in C
- ❖ Consequences of finite width representations
  - Sign extension, overflow
- ❖ Shifting and arithmetic operations



# Signed/Unsigned Conversion Visualized

## ❖ Two's Complement → Unsigned

- Ordering Inversion
- Negative → Big Positive

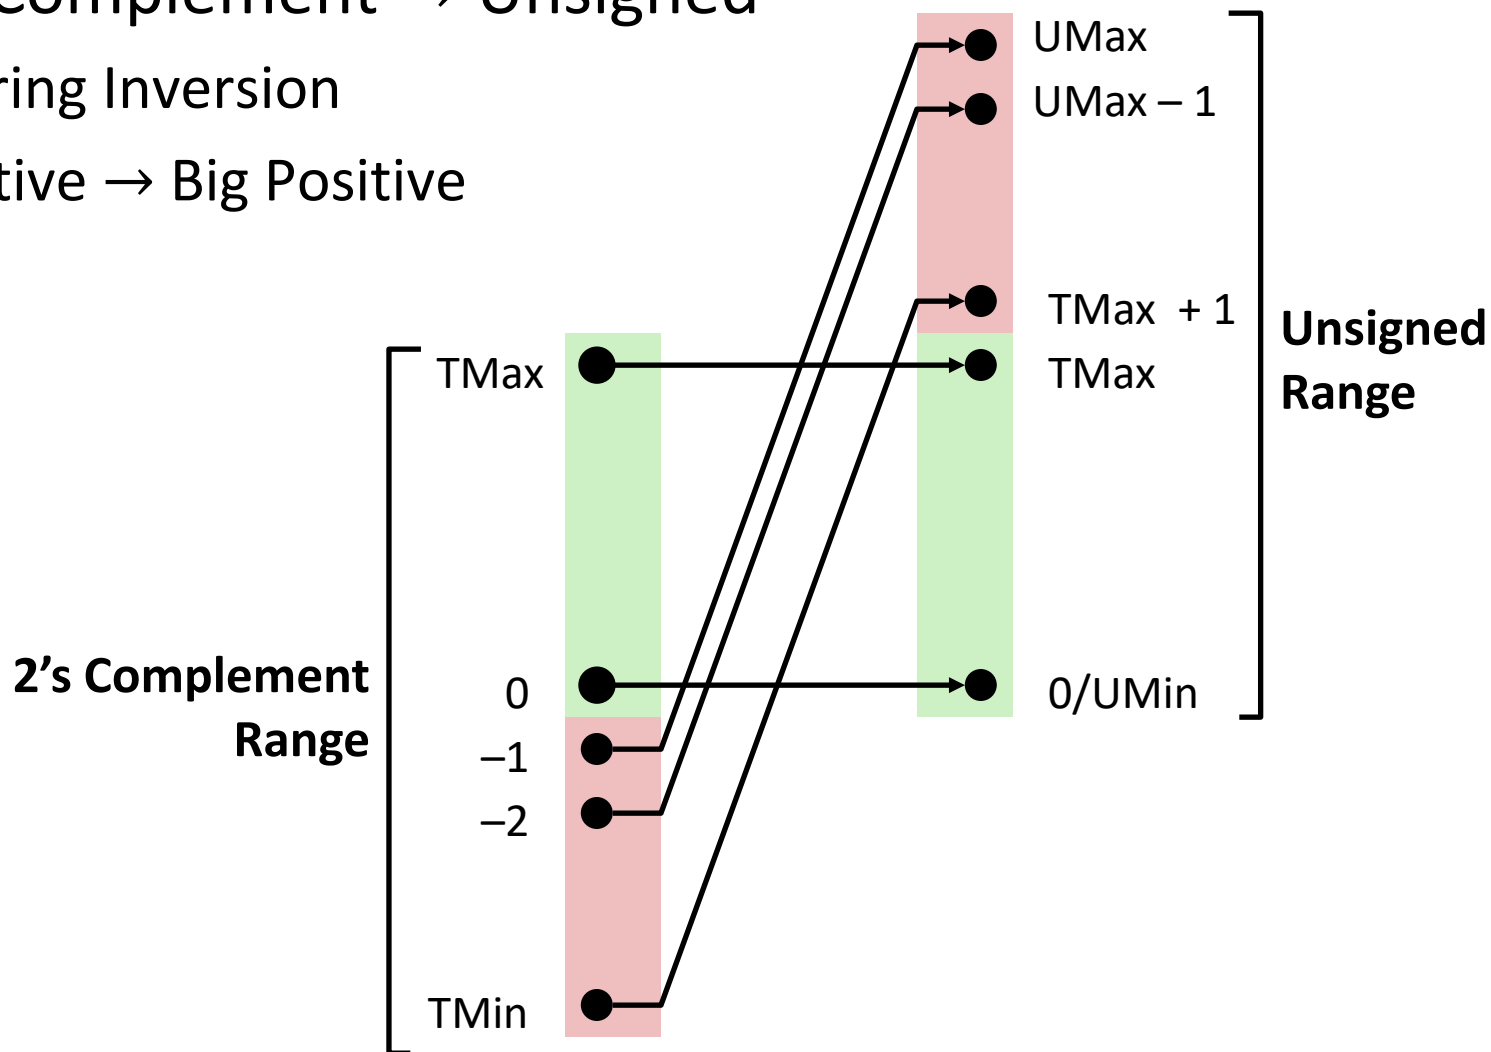

# Values To Remember

## ❖ Unsigned Values

- UMin = 0b00...0  
= 0
- UMax = 0b11...1  
=  $2^w - 1$

## ❖ Two's Complement Values

- TMin = 0b10...0  
=  $-2^{w-1}$
- TMax = 0b01...1  
=  $2^{w-1} - 1$
- -1 = 0b11...1

## ❖ Example: Values for $w = 64$

	Decimal	Hex
UMax	18,446,744,073,709,551,615	FF FF FF FF FF FF FF FF
TMax	9,223,372,036,854,775,807	7F FF FF FF FF FF FF FF
TMin	-9,223,372,036,854,775,808	80 00 00 00 00 00 00 00
-1	-1	FF FF FF FF FF FF FF FF
0	0	00 00 00 00 00 00 00 00

# In C: Signed vs. Unsigned

## ❖ Casting

- Bits are unchanged, just interpreted differently!
  - `int tx, ty;`
  - `unsigned int ux, uy;`
- *Explicit* casting
  - `tx = (int) ux;`
  - `uy = (unsigned int) ty;`
- *Implicit* casting can occur during assignments or function calls
  - `tx = ux;`
  - `uy = ty;`



# Casting Surprises

- ❖ Integer literals (constants)
  - By default, integer constants are considered *signed* integers
    - Hex constants already have an explicit binary representation
  - Use “U” (or “u”) suffix to explicitly force *unsigned*
    - Examples: `0U`, `4294967259u`
- ❖ Expression Evaluation
  - When you mixed unsigned and signed in a single expression, then **signed values are implicitly cast to unsigned**
  - Including comparison operators `<`, `>`, `==`, `<=`, `>=`

# Practice Question 1

- ❖ Assuming 8-bit data (*i.e.*, bit position 7 is the MSB), what will the following expression evaluate to?
  - $UMin = 0, UMax = 255, TMin = -128, TMax = 127$
- ❖  $127 < (\text{signed char}) 128u$

# Integers

- ❖ Binary representation of integers
  - Unsigned and signed
  - Casting in C
- ❖ **Consequences of finite width representations**
  - **Sign extension, overflow**
- ❖ Shifting and arithmetic operations


# Sign Extension

❖ **Task:** Given a  $w$ -bit signed integer  $X$ , convert it to  $w+k$ -bit signed integer  $X'$  with the same value

❖ **Rule:** Add  $k$  copies of sign bit

■ Let  $x_i$  be the  $i$ -th digit of  $X$  in binary

$$X' = \underbrace{x_{w-1}, \dots, x_{w-1}}_{k \text{ copies of MSB}}, \underbrace{x_{w-1}, x_{w-2}, \dots, x_1, x_0}_{\text{original } X}$$

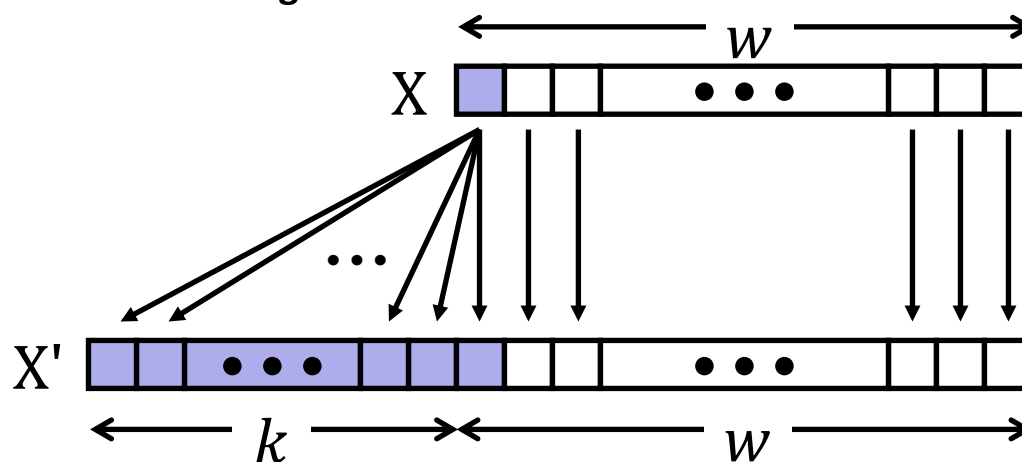

# Two's Complement Arithmetic

- ❖ The same addition procedure works for both unsigned and two's complement integers
  - **Simplifies hardware:** only one algorithm for addition
  - **Algorithm:** simple addition, **discard the highest carry bit**
    - Called modular addition: result is sum *modulo*  $2^w$



# Arithmetic Overflow

Bits	Unsigned	Signed
0000	0	0
0001	1	1
0010	2	2
0011	3	3
0100	4	4
0101	5	5
0110	6	6
0111	7	7
1000	8	-8
1001	9	-7
1010	10	-6
1011	11	-5
1100	12	-4
1101	13	-3
1110	14	-2
1111	15	-1

- ❖ When a calculation produces a result that can't be represented in the current encoding scheme
  - Integer range limited by fixed width
  - Can occur in both the positive and negative directions
- ❖ C and Java ignore overflow exceptions
  - You end up with a bad value in your program and no warning/indication... oops!


# Overflow: Unsigned

- ❖ **Addition:** drop carry bit ( $-2^N$ )

15	1111
+ 2	+ 0010
<del>17</del>	<del>10001</del>
1	

- ❖ **Subtraction:** borrow ( $+2^N$ )

1	10001
- 2	- 0010
<del>-1</del>	1111
15	

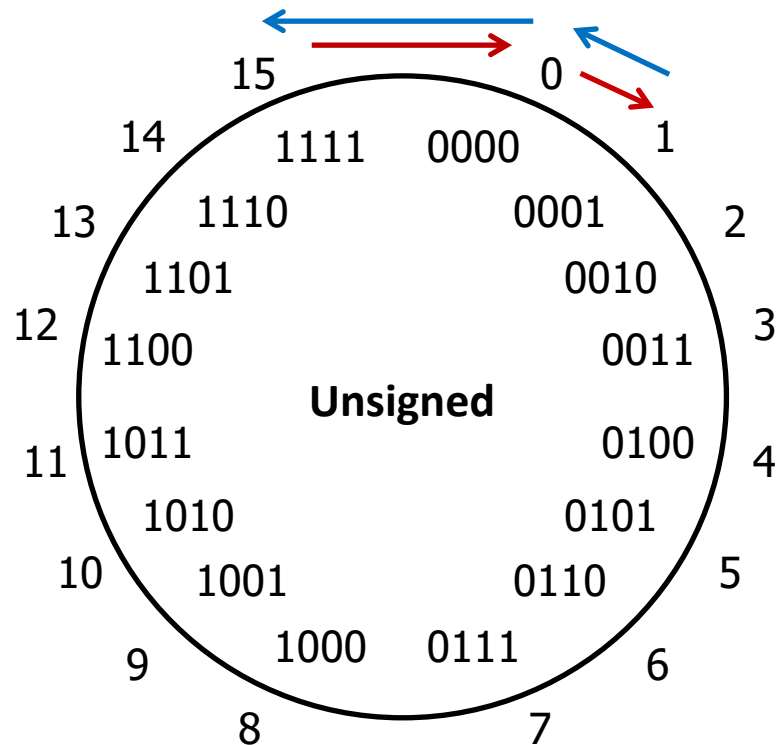

$\pm 2^N$  because of modular arithmetic


# Overflow: Two's Complement

❖ **Addition:** (+) + (+) = (-) result?

$$\begin{array}{r} 6 \\ + 3 \\ \hline \del{9} \\ -7 \end{array} \qquad \begin{array}{r} 0110 \\ + 0011 \\ \hline 1001 \end{array}$$

❖ **Subtraction:** (-) + (-) = (+)?

$$\begin{array}{r} -7 \\ - 3 \\ \hline \del{-10} \\ 6 \end{array} \qquad \begin{array}{r} 1001 \\ - 0011 \\ \hline 0110 \end{array}$$

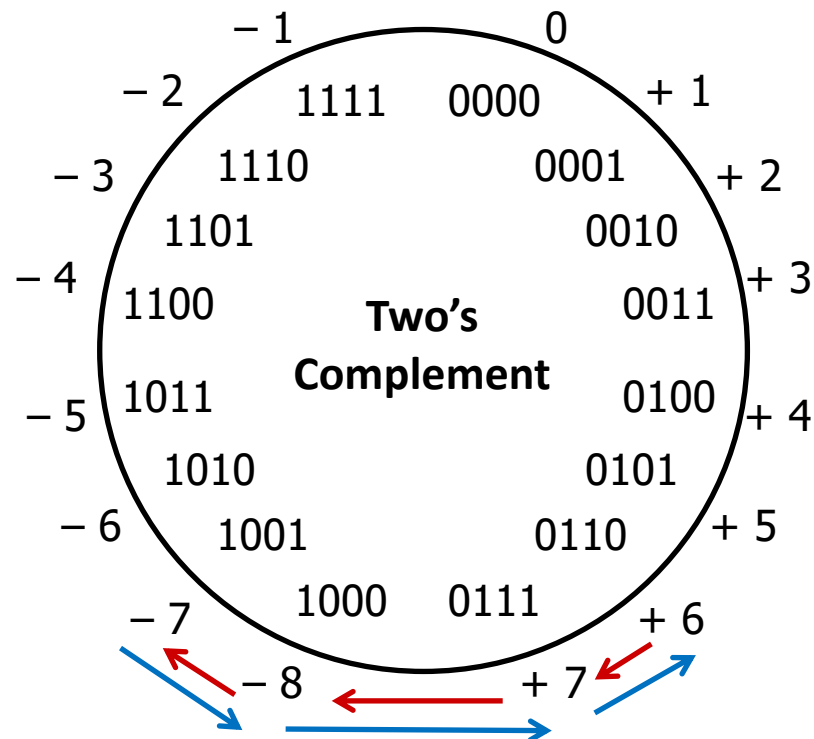

**For signed: overflow if operands have same sign and result's sign is different**

# Practice Questions 2

- ❖ Assuming 8-bit integers:
  - $0x27 = 39$  (signed) = 39 (unsigned)
  - $0xD9 = -39$  (signed) = 217 (unsigned)
  - $0x7F = 127$  (signed) = 127 (unsigned)
  - $0x81 = -127$  (signed) = 129 (unsigned)
  
- ❖ For the following additions, did signed and/or unsigned overflow occur?
  - $0x27 + 0x81$
  
  - $0x7F + 0xD9$

# Integers

- ❖ Binary representation of integers
  - Unsigned and signed
  - Casting in C
- ❖ Consequences of finite width representations
  - Sign extension, overflow
- ❖ **Shifting and arithmetic operations**

# Shift Operations

- ❖ Throw away (drop) extra bits that “fall off” the end
- ❖ Left shift ( $x \ll n$ ) bit vector  $x$  by  $n$  positions
  - Fill with 0’s on right
- ❖ Right shift ( $x \gg n$ ) bit-vector  $x$  by  $n$  positions
  - Logical shift (for **unsigned** values)
    - Fill with 0’s on left
  - Arithmetic shift (for **signed** values)
    - Replicate most significant bit on left (maintains sign of  $x$ )

	x	0010 0010
	$x \ll 3$	0001 0000
logical:	$x \gg 2$	0000 1000
arithmetic:	$x \gg 2$	0000 1000

	x	1010 0010
	$x \ll 3$	0001 0000
logical:	$x \gg 2$	0010 1000
arithmetic:	$x \gg 2$	1110 1000

# Shift Operations

## ❖ Arithmetic:

- Left shift ( $x \ll n$ ) is equivalent to multiply by  $2^n$
- Right shift ( $x \gg n$ ) is equivalent to divide by  $2^n$
- Shifting is faster than general multiply and divide operations!

## ❖ Notes:

- Shifts by  $n < 0$  or  $n \geq w$  ( $w$  is bit width of  $x$ ) are *undefined*
- **In C:** behavior of  $\gg$  is determined by the compiler
  - In gcc / C lang, depends on data type of  $x$  (signed/unsigned)
- **In Java:** logical shift is  $\ggg$  and arithmetic shift is  $\gg$

# Left Shifting Arithmetic 8-bit Example

- ❖ No difference in left shift operation for unsigned and signed numbers (just manipulates bits)
  - Difference comes during interpretation:  $x * 2^n$ ?

		Signed	Unsigned
$x = 25;$	00011001 =	25	25
$L1 = x \ll 2;$	0001100100 =	100	100
$L2 = x \ll 3;$	00011001000 =	-56	200
$L3 = x \ll 4;$	000110010000 =	-112	144

signed overflow

unsigned overflow



# Right Shifting Arithmetic 8-bit Examples

- ❖ **Reminder:** C operator `>>` does *logical* shift on **unsigned** values and *arithmetic* shift on **signed** values
  - **Logical Shift:**  $x / 2^n$ ?

`xu = 240u;`    11110000    = 240

`R1u=xu>>3;`    00011110000    = 30

`R2u=xu>>5;`    0000011110000    = 7

rounding (down)

# Right Shifting Arithmetic 8-bit Examples

- ❖ **Reminder:** C operator `>>` does *logical* shift on **unsigned** values and *arithmetic* shift on **signed** values
  - **Arithmetic** Shift:  $x/2^n$ ?

`xs = -16;`    `11110000`    = -16

`R1s = xs >> 3;`    `11111110000`    = -2

`R2s = xs >> 5;`    `1111111110000`    = -1

rounding (down)

# Challenge Questions

For the following expressions, find a value of `signed char x`, if there exists one, that makes the expression True.

❖ Assume we are using 8-bit arithmetic:

	Example	All Solutions
■ <code>x == (unsigned char) x</code>		
■ <code>x &gt;= 128U</code>		
■ <code>x != (x &gt;&gt; 2) &lt;&lt; 2</code>		
■ <code>x == -x</code> • Hint: there are two solutions		
■ <code>(x &lt; 128U) &amp;&amp; (x &gt; 0x3F)</code>		

# Summary

- ❖ Sign and unsigned variables in C
  - Bit pattern remains the same, just *interpreted* differently
  - Strange things can happen with our arithmetic when we convert/cast between sign and unsigned numbers
    - Type of variables affects behavior of operators (shifting, comparison)
- ❖ We can only represent so many numbers in  $w$  bits
  - When we exceed the limits, *arithmetic overflow* occurs
  - *Sign extension* tries to preserve value when expanding
- ❖ Shifting is a useful bitwise operator
  - Right shifting can be arithmetic (sign) or logical (0)
  - Can be used in multiplication with constant or bit masking

# BONUS SLIDES

Some examples of using shift operators in combination with bitmasks, which you may find helpful for Lab 1b.

- ❖ Extract the 2<sup>nd</sup> most significant byte of an `int`
- ❖ Extract the sign bit of a signed `int`
- ❖ Conditionals as Boolean expressions

# Using Shifts and Masks

- ❖ Extract the 2<sup>nd</sup> most significant *byte* of an `int`:
  - First shift, then mask:  $(x \gg 16) \ \& \ 0xFF$

<b>x</b>	00000001	00000010	00000011	00000100
<b>x&gt;&gt;16</b>	00000000	00000000	00000001	00000010
<b>0xFF</b>	00000000	00000000	00000000	11111111
<b>(x&gt;&gt;16) &amp; 0xFF</b>	00000000	00000000	00000000	00000010

- Or first mask, then shift:  $(x \ \& \ 0xFF0000) \gg 16$

<b>x</b>	00000001	00000010	00000011	00000100
<b>0xFF0000</b>	00000000	11111111	00000000	00000000
<b>x &amp; 0xFF0000</b>	00000000	00000010	00000000	00000000
<b>(x&amp;0xFF0000)&gt;&gt;16</b>	00000000	00000000	00000000	00000010

# Using Shifts and Masks

❖ Extract the *sign bit* of a signed `int`:

- First shift, then mask:  $(x \gg 31) \ \& \ 0x1$ 
  - Assuming arithmetic shift here, but this works in either case
  - Need mask to clear 1s possibly shifted in

<b>x</b>	<b>0</b> 0000001 00000010 00000011 00000100
<b>x&gt;&gt;31</b>	00000000 00000000 00000000 0000000 <b>0</b>
<b>0x1</b>	00000000 00000000 00000000 00000001
<b>(x&gt;&gt;31) &amp; 0x1</b>	00000000 00000000 00000000 00000000

<b>x</b>	<b>1</b> 0000001 00000010 00000011 00000100
<b>x&gt;&gt;31</b>	11111111 11111111 11111111 1111111 <b>1</b>
<b>0x1</b>	00000000 00000000 00000000 00000001
<b>(x&gt;&gt;31) &amp; 0x1</b>	00000000 00000000 00000000 00000001

# Using Shifts and Masks

## ❖ Conditionals as Boolean expressions

- For `int x`, what does `(x<<31)>>31` do?

<code>x=!!123</code>	00000000 00000000 00000000 00000000 <b>1</b>
<code>x&lt;&lt;31</code>	<b>1</b> 00000000 00000000 00000000 00000000
<code>(x&lt;&lt;31)&gt;&gt;31</code>	<b>11111111 11111111 11111111 11111111</b>
<code>!x</code>	00000000 00000000 00000000 00000000 <b>0</b>
<code>!x&lt;&lt;31</code>	<b>0</b> 00000000 00000000 00000000 00000000
<code>(!x&lt;&lt;31)&gt;&gt;31</code>	<b>00000000 00000000 00000000 00000000</b>

- Can use in place of conditional:

- In C: `if (x) {a=y;} else {a=z;} equivalent to a=x?y:z;`
- `a = ((x<<31)>>31) & y | ((!x<<31)>>31) & z;`