



[pollev.com/cse333](https://pollev.com/cse333)

## About how long did Exercise 1 take you?

- A. [0, 2) hours
- B. [2, 4) hours
- C. [4, 6) hours
- D. [6, 8) hours
- E. 8+ Hours
- F. I didn't submit / I prefer not to say

# Pointers, The Heap

## CSE 333 Winter 2023

**Instructor:** Justin Hsia

**Teaching Assistants:**

Adina Tung

Danny Agustinus

Edward Zhang

James Froelich

Lahari Nidadavolu

Mitchell Levy

Noa Ferman

Patrick Ho

Paul Han

Saket Gollapudi

Sara Deutscher

Tim Mandzyuk

Timmy Yang

Wei Wu

Yiqing Wang

Zhuochun Liu

# Relevant Course Information (1/3)

- ❖ Exercise 2 out today and due Friday (1/13) morning
  
- ❖ Exercise grading
  - Autograder scores visible immediately after deadline; sample solutions released same day as deadline
  - Grades (out of 8):
    - Autograder: Compilation (1), Correctness (3), Linter (1), Valgrind (1)
    - Manual: Other Style (2)
  - Style things to watch for:
    - FOLLOW THE SPEC (especially the Style Guide section)
    - Check the Google C++ Style Guide
    - Make a judgment call and document
  - Keep style tips in mind, as you will need to use them in hw

# Relevant Course Information (2/3)

- ❖ hw0 due tonight *before* 11:59 pm (and 0 seconds)
  - Git: add/commit/push, then tag with `hw0-final`, then push tag
    - Then clone your repo somewhere totally different and do `git checkout hw0-final` and verify that all is well
- ❖ hw1 due Thursday, 1/19 @ 11:59 pm
  - You **may not** modify interfaces ( `.h` files), but **do** read the interfaces while you're implementing them (!)
  - Record bugs in `bugjournal.md`
  - Suggestion: pace yourself and make steady progress

# Relevant Course Information (3/3)

- ❖ Documentation:
  - man pages, books
  - Reference websites: `cplusplus.org`, `man7.org`, `gcc.gnu.org`, etc.
- ❖ Folklore:
  - Google-ing, Stack Overflow, that rando in Discord
- ❖ Tradeoffs? Relative strengths & weaknesses?

# Output Parameters

**Warning:** Misuse of output parameters is *the* largest cause of errors in this course!

## ❖ Output parameter

- A pointer parameter used to store (via dereference) a function output *outside* of the function's stack frame
  - Typically points to/modifies something in the **Caller's** scope
- Useful if you want to have multiple return values

## ❖ Setup and usage:

- 1) **Caller** creates space for the data (*e.g.*, `type var;`)
- 2) **Caller** passes in a pointer to **Callee** (*e.g.*, `&var`)
- 3) **Callee** takes in output parameter (*e.g.*, `type* outparam`)
- 4) **Callee** uses parameter to set output (*e.g.*, `*outparam = value;`)
- 5) **Caller** accesses output via modified data (*e.g.*, `var`)



# Poll Everywhere

[pollev.com/cse333](https://pollev.com/cse333)

## Which is an *incorrect* way to invoke `GenerateString()`?

- ❖ Of the working ways, which would be preferred?

```
void GenerateString(char** output) {  
    *output = "Hello there\n";  
}
```

A. 

```
char** result;  
GenerateString(result);  
printf("%s", *result);
```

B. 

```
char* str;  
char** result = &str;  
GenerateString(result);  
printf("%s", str);
```

C. 

```
char* result[1] = {NULL};  
GenerateString(result);  
printf("%s", result[0]);
```

D. 

```
char* result;  
GenerateString(&result);  
printf("%s", result);
```

E. We're lost...

# Lecture Outline

- ❖ **Function Pointers**
- ❖ Heap-allocated Memory
  - `malloc()` and `free()`
  - Memory leaks



# Function Pointers

- ❖ Based on what you know about assembly, what is a function name, really?
  - Can use pointers that store addresses of functions!

- ❖ Generic format:

```
returnType (* name) (type1, ..., typeN)
```

- Looks like a function prototype with extra \* in front of name
- Why are parentheses around (\* name) needed?

- ❖ Using the function: 

```
(*name) (arg1, ..., argN)
```

- Calls the pointed-to function with the given arguments and return the return value

# Function Pointer Example

- ❖ Map () performs operation on each element of an array

```
#define LEN 4

int Negate(int num) {return -num;}
int Square(int num) {return num * num;}

// perform operation pointed to on each array element
void Map(int a[], int len, int (* op)(int n)) {
    for (int i = 0; i < len; i++) {
        a[i] = (*op)(a[i]); // dereference function pointer
    }
}

int main(int argc, char** argv) {
    int arr[LEN] = {-1, 0, 1, 2};
    int (* op)(int n); // function pointer called 'op'
    op = Square; // function name returns addr (like array)
    Map(arr, LEN, op);
    ...
}
```

funcptr parameter

funcptr dereference

funcptr definition

funcptr assignment

# Function Pointer Example

- ❖ C allows you to omit `&` on a function name (like arrays) and omit `*` when calling pointed-to function

```
#define LEN 4

int Negate(int num) {return -num;}
int Square(int num) {return num * num;}

// perform operation pointed to on each array element
void Map(int a[], int len, int (* op)(int n)) {
    for (int i = 0; i < len; i++) {
        a[i] = op(a[i]); // dereference function pointer
    }
}

int main(int argc, char** argv) {
    int arr[LEN] = {-1, 0, 1, 2};
    Map(arr, LEN, Square);
    ...
}
```

*implicit funcptr dereference (no \* needed)*

*no & needed for func ptr argument*

# Lecture Outline

- ❖ Function Pointers
- ❖ **Heap-allocated Memory**
  - `malloc()` and `free()`
  - Memory leaks

# Why Dynamic Allocation?

- ❖ Situations where static and automatic allocation aren't sufficient:
  - We need memory that persists across multiple function calls but not for the whole lifetime of the program
  - We need more memory than can fit on the Stack
  - We need memory whose size is not known in advance
    - *e.g.*, reading file input:

```
// this is pseudo-C code  
char* ReadFile(char* filename) {  
    int size = GetFileSize(filename);  
    char* buffer = AllocateMem(size);  
  
    ReadFileIntoBuffer(filename, buffer);  
    return buffer;  
}
```

# Aside: NULL

- ❖ `NULL` is a memory location that is **guaranteed to be invalid**
  - In C on Linux, `NULL` is `0x0` and an attempt to dereference `NULL` *causes a segmentation fault*
- ❖ Useful as an indicator of an uninitialized (or currently unused) pointer or allocation error
  - It's better to cause a segfault than to allow the corruption of memory!

segfault.c

```
int main(int argc, char** argv) {  
    int* p = NULL;  
    *p = 1; // causes a segmentation fault  
    return EXIT_SUCCESS;  
}
```



# malloc()

- ❖ General usage: `var = (type*) malloc(size in bytes)`
- ❖ **malloc** allocates an uninitialized block of heap memory of at least the requested size
  - Returns a pointer to the first byte of that memory; **returns NULL** if the memory allocation failed!
  - Stylistically, you'll want to (1) use `sizeof` in your argument, (2) cast the return value, and (3) error check the return value

```
// allocate a 10-float array
float* arr = (float*) malloc(10*sizeof(float));
if (arr == NULL) {
    return errcode;
}
... // do stuff with arr
```

- ❖ Also, see **calloc()** and **realloc()**

# free()

- ❖ Usage: `free(pointer);`
- ❖ Deallocates the memory pointed-to by the pointer
  - Pointer *must* point to the first byte of heap-allocated memory (*i.e.*, something previously returned by `malloc` or `calloc`)
  - Freed memory becomes eligible for future allocation
  - Freeing `NULL` has no effect
  - The bits stored in the pointer are *not changed* by calling `free`
    - Defensive programming: can set pointer to `NULL` after freeing it

```
float* arr = (float*) malloc(10*sizeof(float));
if (arr == NULL)
    return errcode;
...           // do stuff with arr
free(arr);
arr = NULL;   // OPTIONAL
```



# Heap and Stack Example

Note: Arrow points to *next* instruction.

arraycopy.c

```
#include <stdlib.h>


int* Copy(int a[], int size) {
    int i, *a2;

    a2 = malloc(size * sizeof(int));
    if (a2 == NULL)
        return NULL;

    for (i = 0; i < size; i++)
        a2[i] = a[i];

    return a2;
}

int main(int argc, char** argv) {
    int nums[4] = {1, 2, 3, 4};
    int* nums_copy = Copy(nums, 4);
    // .. do stuff with the array ..
    free(nums_copy);
    return EXIT_SUCCESS;
}
```

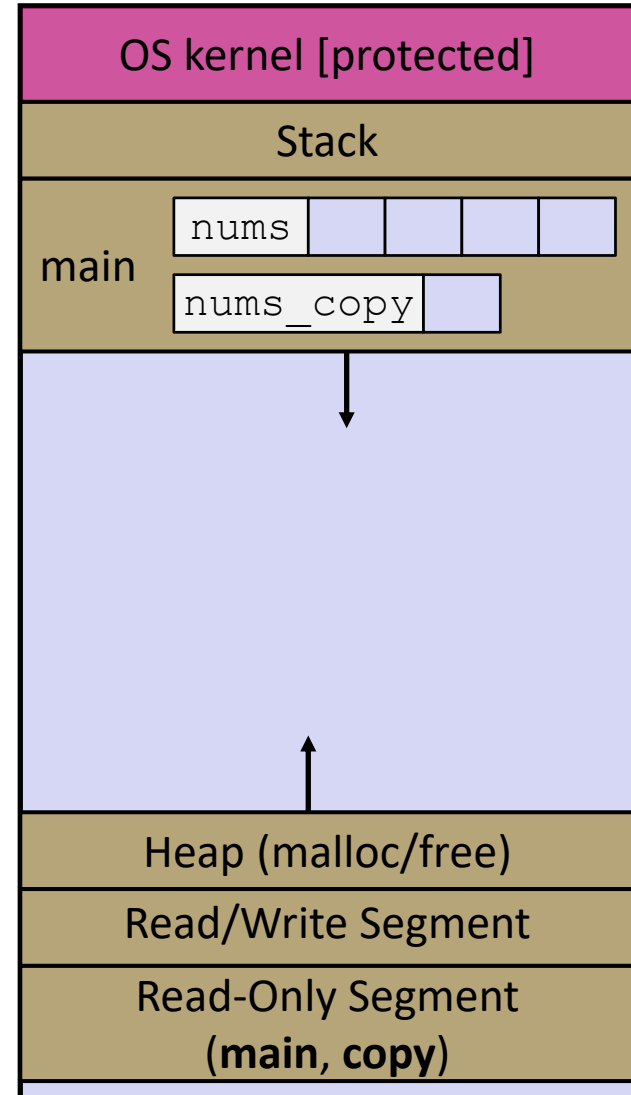

# Heap and Stack Example

Note: Arrow points to *next* instruction.

arraycopy.c

```
#include <stdlib.h>


int* Copy(int a[], int size) {
    int i, *a2;

    a2 = malloc(size * sizeof(int));
    if (a2 == NULL)
        return NULL;

    for (i = 0; i < size; i++)
        a2[i] = a[i];

    return a2;
}

int main(int argc, char** argv) {
    int nums[4] = {1, 2, 3, 4};
    int* nums_copy = Copy(nums, 4);
    // .. do stuff with the array ..
    free(nums_copy);
    return EXIT_SUCCESS;
}
```

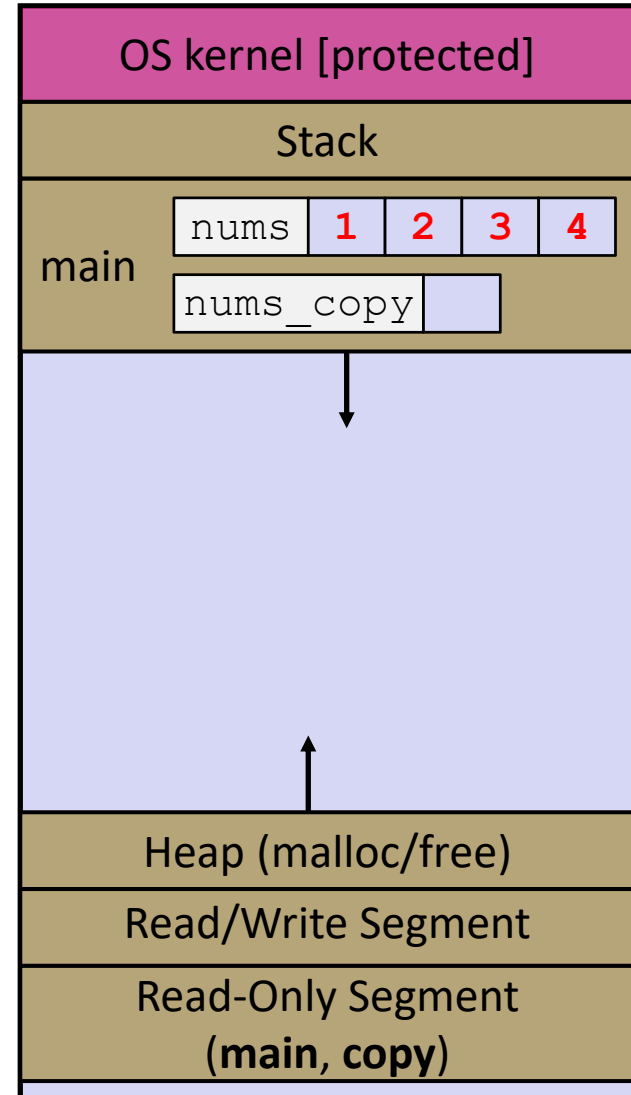

# Heap and Stack Example

Note: Arrow points to *next* instruction.

arraycopy.c

```
#include <stdlib.h>


int* Copy(int a[], int size) {
    int i, *a2;

    a2 = malloc(size * sizeof(int));
    if (a2 == NULL)
        return NULL;

    for (i = 0; i < size; i++)
        a2[i] = a[i];

    return a2;
}

int main(int argc, char** argv) {
    int nums[4] = {1, 2, 3, 4};
    int* nums_copy = Copy(nums, 4);
    // .. do stuff with the array ..
    free(nums_copy);
    return EXIT_SUCCESS;
}
```

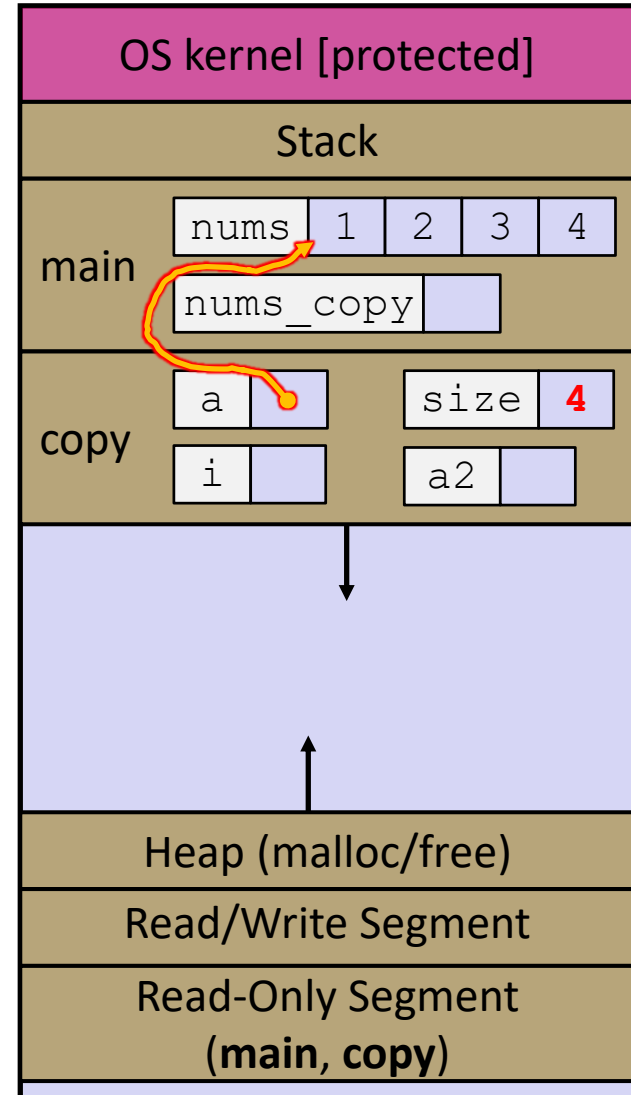

# Heap and Stack Example

Note: Arrow points to *next* instruction.

arraycopy.c

```
#include <stdlib.h>


int* Copy(int a[], int size) {
    int i, *a2;

    a2 = malloc(size * sizeof(int));
    if (a2 == NULL)
        return NULL;

    for (i = 0; i < size; i++)
        a2[i] = a[i];

    return a2;
}

int main(int argc, char** argv) {
    int nums[4] = {1, 2, 3, 4};
    int* nums_copy = Copy(nums, 4);
    // .. do stuff with the array ..
    free(nums_copy);
    return EXIT_SUCCESS;
}
```

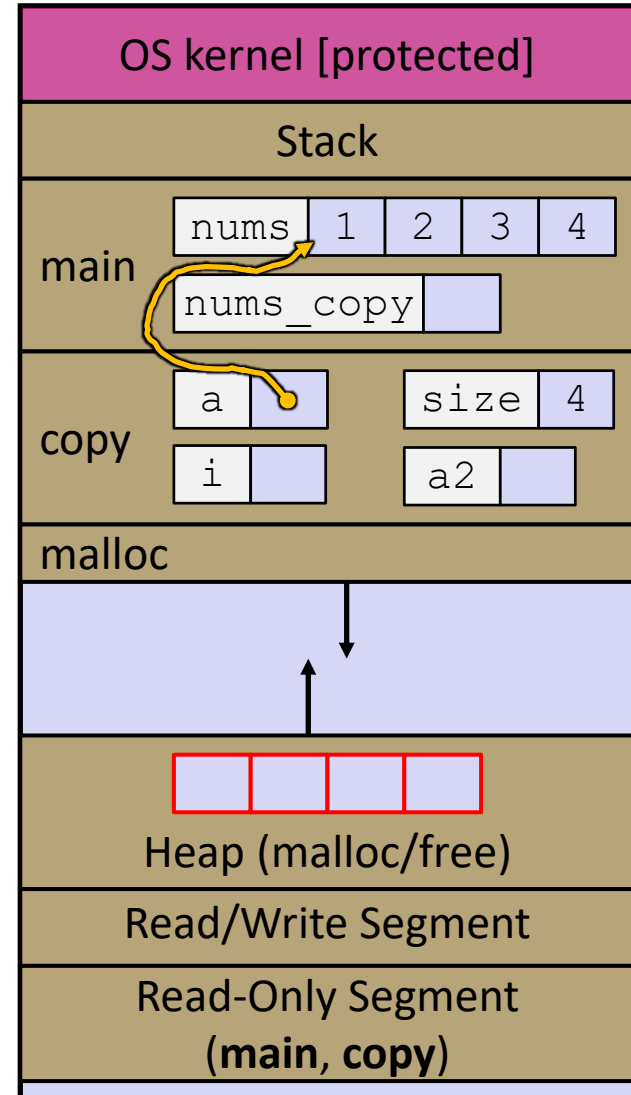

# Heap and Stack Example

Note: Arrow points to *next* instruction.

arraycopy.c

```
#include <stdlib.h>


int* Copy(int a[], int size) {
    int i, *a2;

    a2 = malloc(size * sizeof(int));
    if (a2 == NULL)
        return NULL;

    for (i = 0; i < size; i++)
        a2[i] = a[i];

    return a2;
}

int main(int argc, char** argv) {
    int nums[4] = {1, 2, 3, 4};
    int* nums_copy = Copy(nums, 4);
    // .. do stuff with the array ..
    free(nums_copy);
    return EXIT_SUCCESS;
}
```

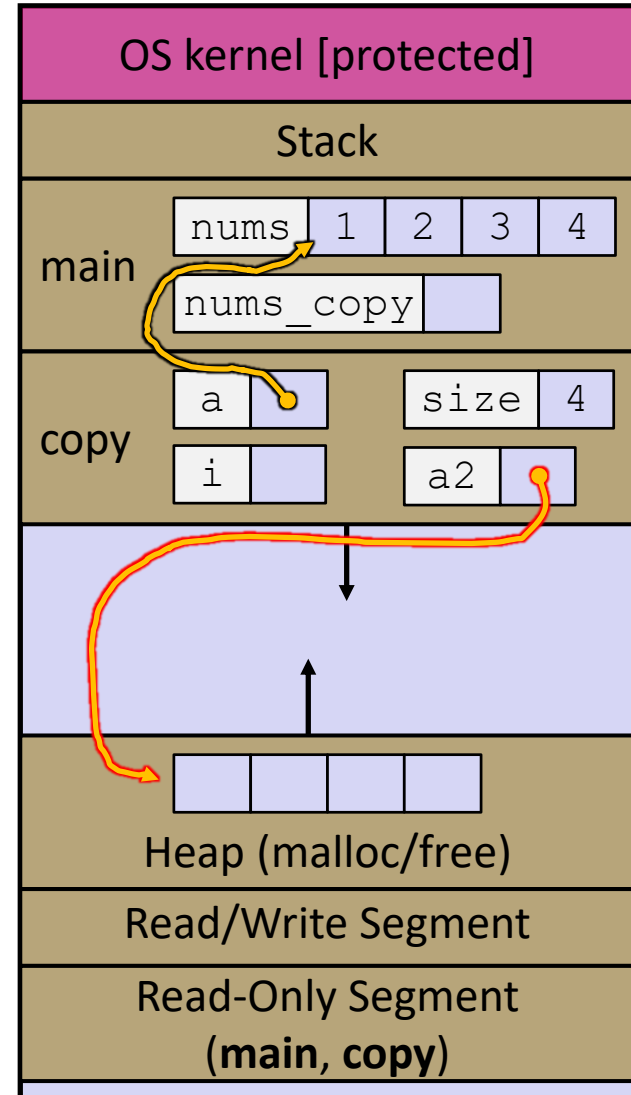

# Heap and Stack Example

Note: Arrow points to *next* instruction.

arraycopy.c

```
#include <stdlib.h>


int* Copy(int a[], int size) {
    int i, *a2;

    a2 = malloc(size * sizeof(int));
    if (a2 == NULL)
        return NULL;

    for (i = 0; i < size; i++)
        a2[i] = a[i];

    return a2;
}

int main(int argc, char** argv) {
    int nums[4] = {1, 2, 3, 4};
    int* nums_copy = Copy(nums, 4);
    // .. do stuff with the array ..
    free(nums_copy);
    return EXIT_SUCCESS;
}
```

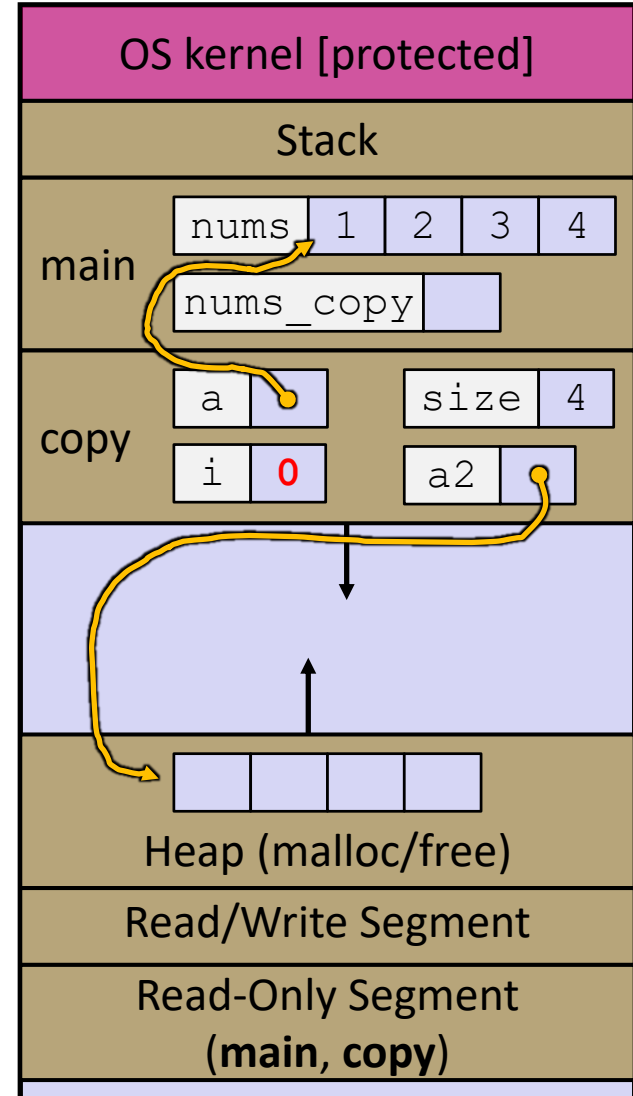

# Heap and Stack Example

Note: Arrow points to *next* instruction.

arraycopy.c

```
#include <stdlib.h>


int* Copy(int a[], int size) {
    int i, *a2;

    a2 = malloc(size * sizeof(int));
    if (a2 == NULL)
        return NULL;

    for (i = 0; i < size; i++)
        a2[i] = a[i];

    return a2;
}

int main(int argc, char** argv) {
    int nums[4] = {1, 2, 3, 4};
    int* nums_copy = Copy(nums, 4);
    // .. do stuff with the array ..
    free(nums_copy);
    return EXIT_SUCCESS;
}
```

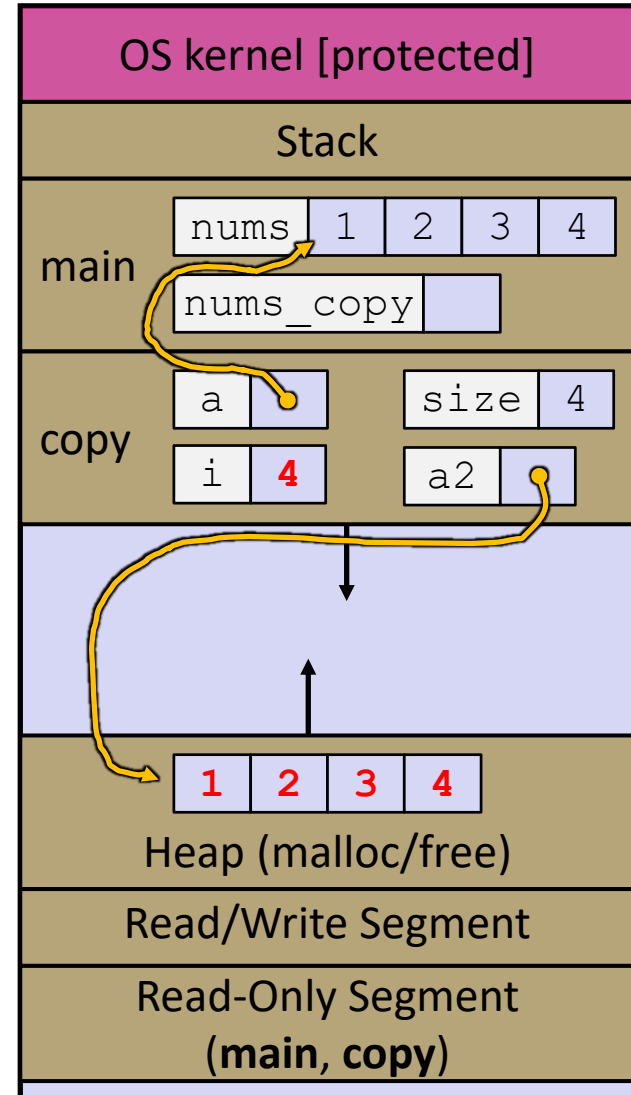

# Heap and Stack Example

Note: Arrow points to *next* instruction.

arraycopy.c

```
#include <stdlib.h>


int* Copy(int a[], int size) {
    int i, *a2;

    a2 = malloc(size * sizeof(int));
    if (a2 == NULL)
        return NULL;

    for (i = 0; i < size; i++)
        a2[i] = a[i];

    return a2;
}

int main(int argc, char** argv) {
    int nums[4] = {1, 2, 3, 4};
    int* nums_copy = Copy(nums, 4);
    // .. do stuff with the array ..
    free(nums_copy);
    return EXIT_SUCCESS;
}
```

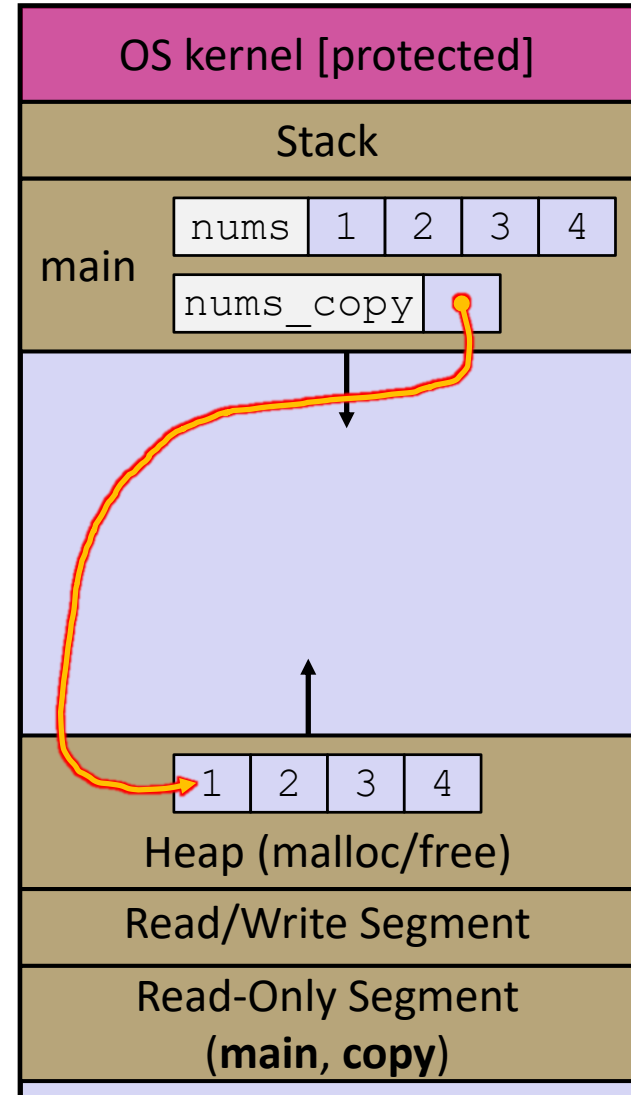



# Heap and Stack Example

Note: Arrow points to *next* instruction.

arraycopy.c

```
#include <stdlib.h>


int* Copy(int a[], int size) {
    int i, *a2;

    a2 = malloc(size * sizeof(int));
    if (a2 == NULL)
        return NULL;

    for (i = 0; i < size; i++)
        a2[i] = a[i];

    return a2;
}

int main(int argc, char** argv) {
    int nums[4] = {1, 2, 3, 4};
    int* nums_copy = Copy(nums, 4);
    // .. do stuff with the array ..
    free(nums_copy);
    return EXIT_SUCCESS;
}
```

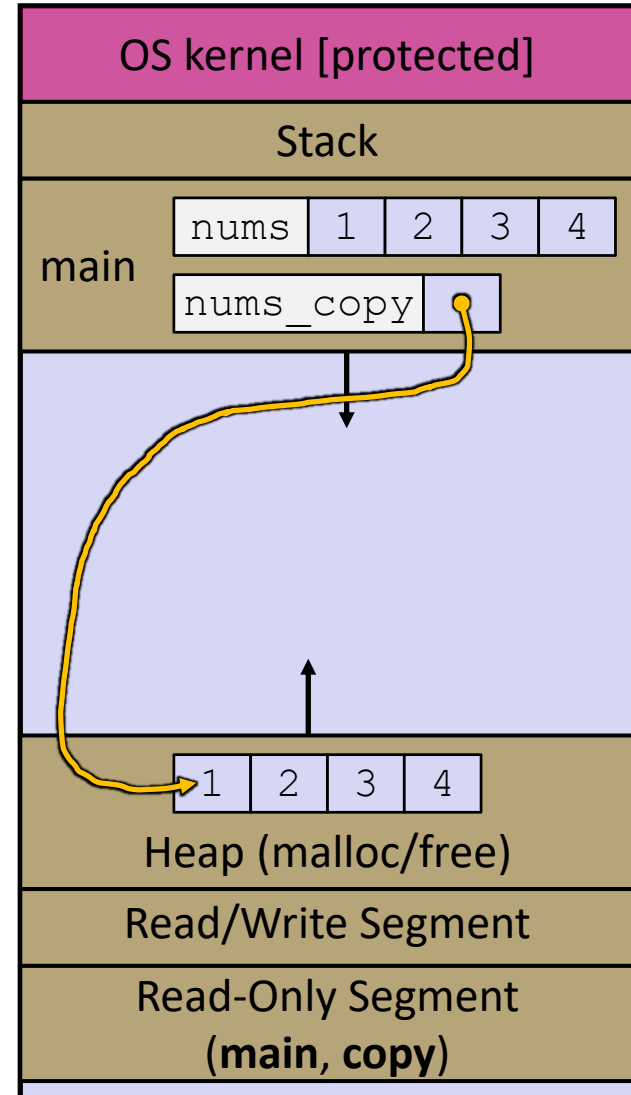

# Heap and Stack Example

Note: Arrow points to *next* instruction.

arraycopy.c

```
#include <stdlib.h>


int* Copy(int a[], int size) {
    int i, *a2;

    a2 = malloc(size * sizeof(int));
    if (a2 == NULL)
        return NULL;

    for (i = 0; i < size; i++)
        a2[i] = a[i];

    return a2;
}

int main(int argc, char** argv) {
    int nums[4] = {1, 2, 3, 4};
    int* nums_copy = Copy(nums, 4);
    // .. do stuff with the array ..
    free(nums_copy);
    return EXIT_SUCCESS;
}
```

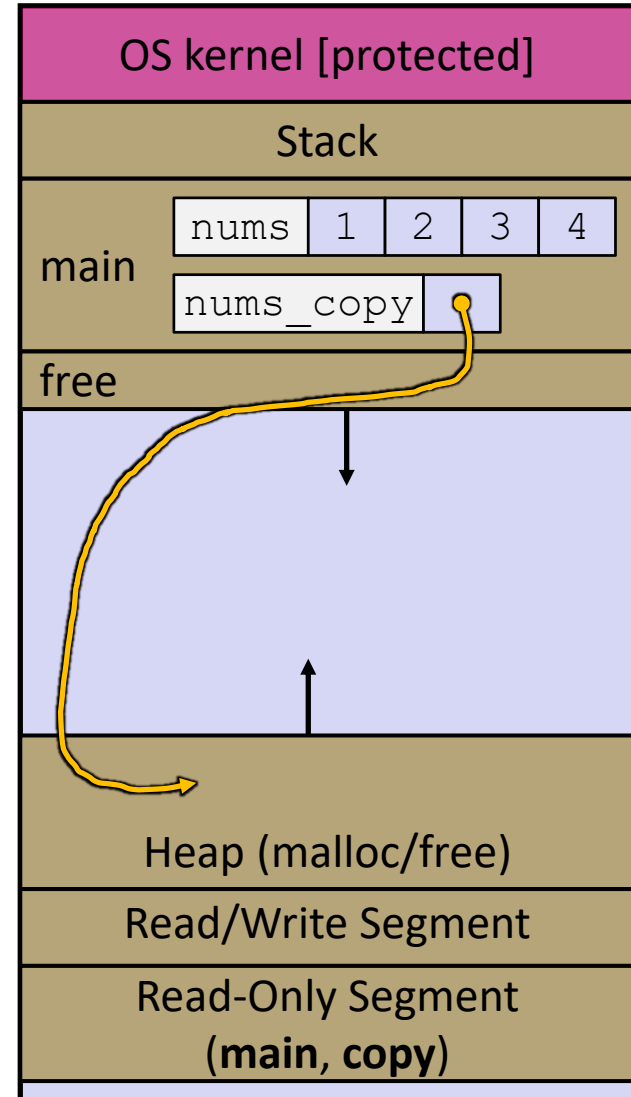

# Heap and Stack Example

Note: Arrow points to *next* instruction.

arraycopy.c

```
#include <stdlib.h>


int* Copy(int a[], int size) {
    int i, *a2;

    a2 = malloc(size * sizeof(int));
    if (a2 == NULL)
        return NULL;

    for (i = 0; i < size; i++)
        a2[i] = a[i];

    return a2;
}

int main(int argc, char** argv) {
    int nums[4] = {1, 2, 3, 4};
    int* nums_copy = Copy(nums, 4);
    // .. do stuff with the array ..
    free(nums_copy);
    return EXIT_SUCCESS;
}
```

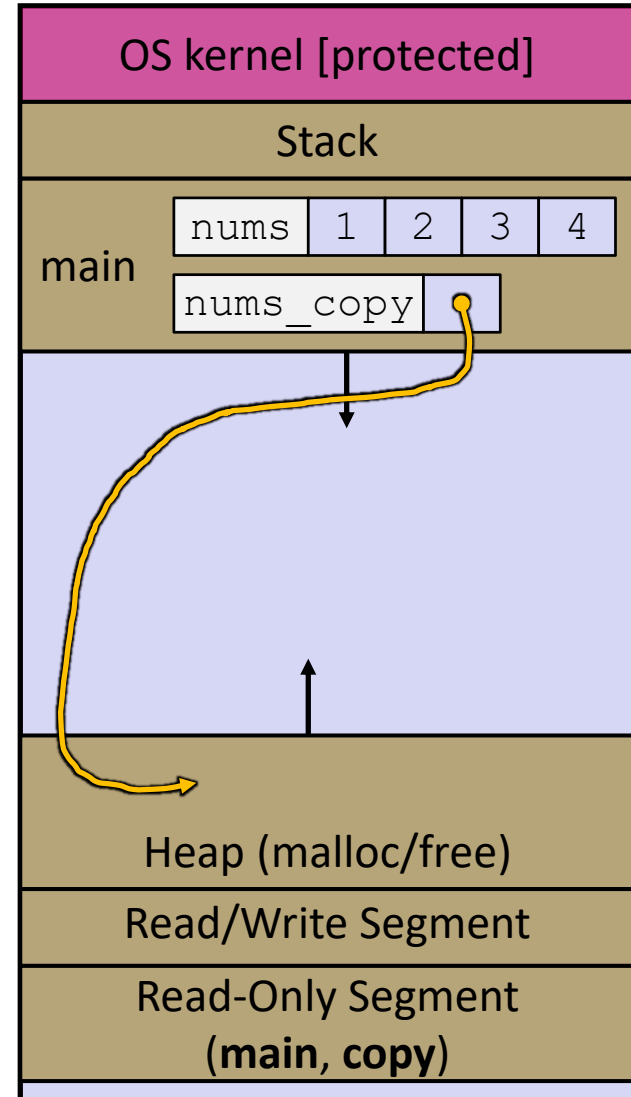



# Poll Everywhere

[pollev.com/cse333](https://pollev.com/cse333)

Which line will first cause a *guaranteed* error or undefined behavior?

memcorrupt.c

- A. Line 1
- B. Line 4
- C. Line 6
- D. Line 7
- E. We're lost...

```
1  #include <stdio.h>
2  #include <stdlib.h>
3
4  int main(int argc, char** argv) {
5      int a[2];
6      int* b = malloc(2*sizeof(int));
7      int* c;
8
9      a[2] = 5;
10     b[0] += 2;
11     c = b+3;
12     free(&(a[0]));
13     free(b);
14     free(b);
15     b[0] = 5;
16
17     return EXIT_SUCCESS;
18 }
```

# Memory Leaks

- ❖ A **memory leak** occurs when code fails to deallocate dynamically-allocated memory that is no longer used
  - *e.g.*, forget to **free** malloc-ed block, lose/change pointer to malloc-ed block
  - Easier said than done; just passing pointers around – who's responsible for freeing?
- ❖ What happens: program's virtual memory footprint will keep growing
  - This might be OK for *short-lived* program, since all memory is deallocated when program ends
  - Usually has bad memory and performance repercussions for *long-lived* programs

# Extra Exercise #1

- ❖ Write a function that:
  - Accepts a function pointer and an integer as arguments
  - Invokes the pointed-to function with the integer as its argument

# Extra Exercise #2

- ❖ Write a function that:
  - Accepts a string as a parameter
  - Returns:
    - The first white-space separated word in the string as a newly-allocated string
    - AND the size of that word

# Extra Exercise #3

- ❖ Write a function that:
  - Arguments: [1] an array of ints and [2] an array length
  - Malloc's an `int*` array of the same element length
  - Initializes each element of the newly-allocated array to point to the corresponding element of the passed-in array
  - Returns a pointer to the newly-allocated array