

1. Displays and framebuffers

Reading

Required

- ♦ Angel, pp.19-31.
- ♦ Hearn & Baker, pp. 36-38, 154-157.


Optional

- ♦ Foley et al., sections 1.5, 4.2-4.5
- ♦ I.E. Sutherland. Sketchpad: a man-machine graphics communication system. *Proceedings of the Spring Joint Computer Conference*, p. 329-346, 1963.
- ♦ T.H. Myer & I.E. Sutherland. On the design of display processors. *Communications of the ACM* 11(6): 410-414, 1968.

History

- ♦ Whirlwind Computer - MIT, 1950
 - CRT display
- ♦ SAGE air-defense system - middle 1950's
 - "Whirlwind II"
 - light pens
- ♦ Sketchpad - 1963, Ivan Sutherland
 - first interactive graphics system
 - constraint-based
 - interaction techniques for choosing, pointing, drawing
 - data structures for replicating components
 - hierarchical modeling

Modern graphics systems

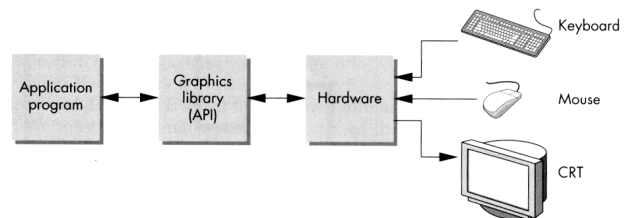


Current graphics systems consist of:

- An application, which talks to a...
- Graphics library (e.g., OpenGL or Direct3D), which talks to the...
- Graphics hardware

The graphics hardware can do a lot of fancy work these days. At a minimum, it contains a framebuffer to drive a display...

Cathode ray tubes (CRTs)

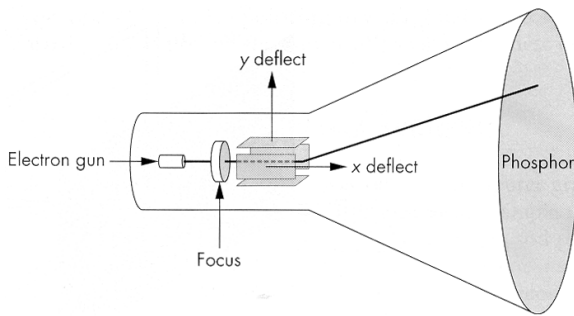

Consists of:

- ◆ electron gun
- ◆ electron focusing lens
- ◆ deflection plates/coils
- ◆ electron beam
- ◆ anode with phosphor coating

5

CRTs, cont.

Electrons “boil off” the heated cathode and shoot towards the anode. Electrons striking the phosphors create light through:

- ◆ fluorescence (fraction of usec)
- ◆ phosphorescence (10 to 60 usec)


Different phosphors have different:

- ◆ color
 - red: europium yttrium vanadate
 - green: zinc cadmium sulfide
 - blue: zinc sulfide
- ◆ persistence (as long as a few seconds)

The image must be **refreshed** to avoid **flicker**, typically at least 60 Hz, though 72 Hz is easier on the eyes.

6

Calligraphic displays

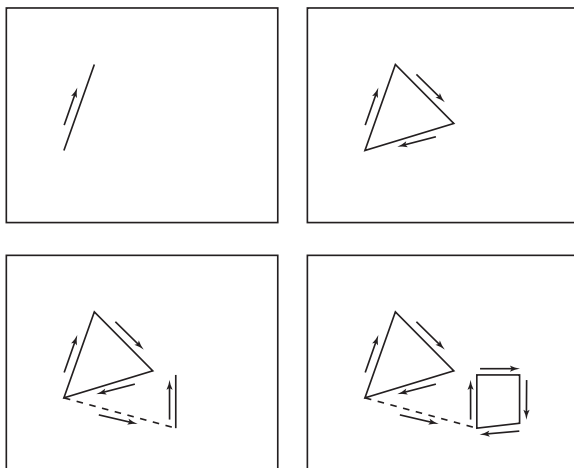

Also called **vector displays**, **stroke displays**, or **random-scan displays**.


Used by:

- ◆ Sutherland’s Sketchpad
- ◆ Asteroids video game
- ◆ Oscilloscopes

7

Raster displays

ras.ter, from radere, “to scrape”

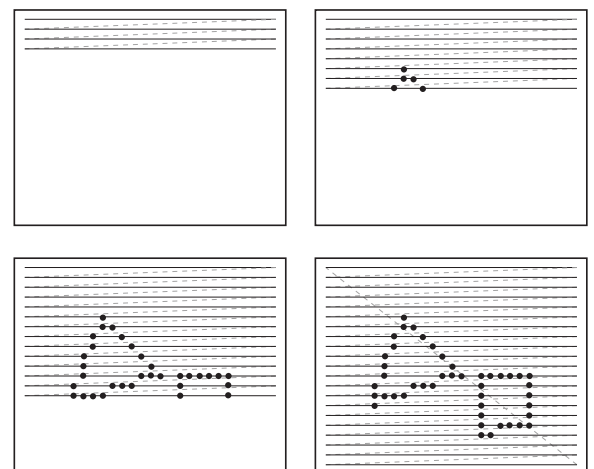


Electron beam traces over screen in **raster scan order**.

- ◆ Each left-to-right trace is called a **scan line**.
- ◆ Each spot on the screen is a **pixel**.
- ◆ When the beam is turned off to sweep back, that is a **retrace**, or a **blanking interval**.

8

Framebuffer

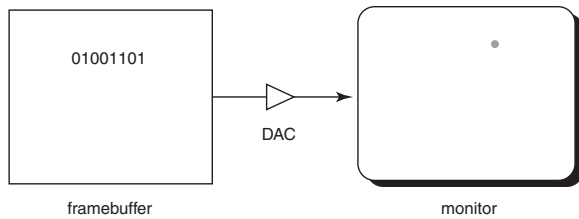

Intensity of the raster scan beam is modulated according to the contents of a **framebuffer**.

Each element of the framebuffer is associated with a single **pixel** on the screen.

9

Resolution

The display's "**resolution**" is determined by:

- ◆ number of scan lines
- ◆ number of pixels per scan line
- ◆ number of bits per pixel

Resolution is used here to mean total number of bits in a display. It should really refer to the resolvable dots per unit length...

Examples:

| | | |
|--------------------|-----------------------------------|--------|
| Bitmapped display | 960 x 1152 x 1b | 1/8 MB |
| NTSC TV | 640 x 480 x 16b | 1/2 MB |
| Color workstation | 1280 x 1024 x 24b | 4 MB |
| Laser-printed page | | |
| 300 dpi | 8.5 x 11 x 300 ² x 1b | 1 MB |
| 1200 dpi | 8.5 x 11 x 1200 ² x 1b | 17 MB |
| Film | 4500 x 3000 x 30b | 50 MB |

10

Aspect ratio

Frame aspect ratio = horizontal / vertical size


| | |
|-------------------|------------------------|
| TV | 4 : 3 |
| HDTV | 16 : 9 |
| Letter-size paper | 8.5 : 11 (about 3 : 4) |
| 35mm film | 3 : 2 |
| Panavision | 2.35 : 1 |

Pixel aspect ratio = pixel width / pixel height

- ◆ nowadays, this is almost always 1.

11

Color CRT monitors

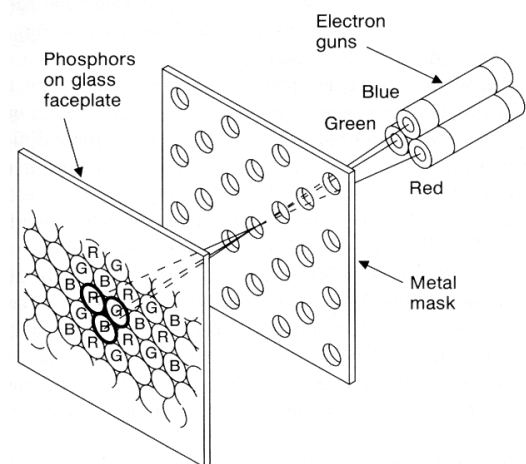


Many color monitors employ **shadow mask** technology. The variety depicted above:

- ◆ uses **triads** of red, green, and blue phosphors at each pixel
- ◆ uses three electron guns, one per color
- ◆ **shadow mask** used to make each kind of phosphor only "visible" from one gun

These are also known as **RGB monitors**.

12

Color Trinitron CRT's

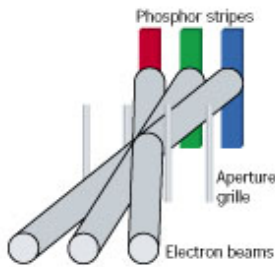


A competing technology is called Trinitron (by Sony):

- ♦ uses vertical stripes of red, green, and blue phosphors at each pixel
- ♦ uses three electron guns, one per color
- ♦ uses an **aperture grille** to make each kind of phosphor only “visible” from one gun

You can see two horizontal lines at about $\frac{1}{4}$ and $\frac{3}{4}$ of the way up the screen on Trinitron displays. Why?

13

Liquid Crystal Displays

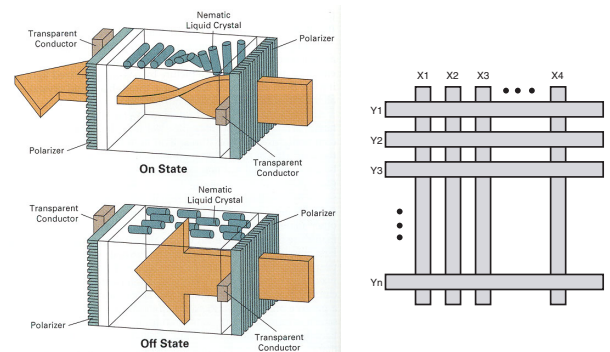

Laptops typically use **liquid crystal displays (LCD's)**.

- ♦ Light enters a **vertical polarizer**
- ♦ **Nematic crystal** twists light based on applied voltage (more voltage, less twisting)
- ♦ Light passes through **horizontal polarizer**


Passive matrix displays use a matrix of electrodes to control the voltages. Problem: slow to switch, overflows.

Active matrix displays have a transistor at each cell. They use a faster switching crystal and transistors that hold charge and prevent overflow.

Color filters are used to get color display.

14

Additive color mixing

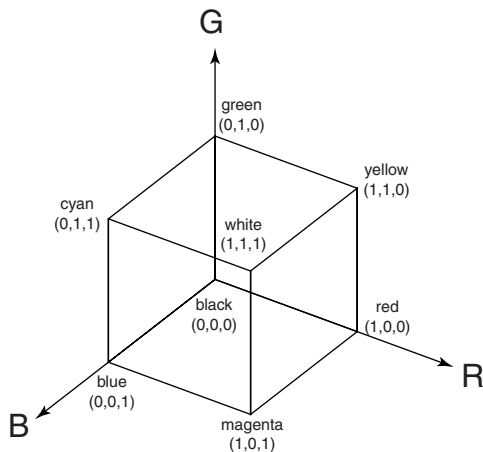

All colors on a monitor or LCD are produced using combinations of red, green, and blue.


A display that allows 256 voltage settings for each of R, G, and B is known as a **full-color system**.

The description of each color in framebuffer memory is known as a **channel**.

15

Color tables

Color tables allow more color versatility when you only have a few bits per pixel. You get to select a small **palette** from a large number of available colors.

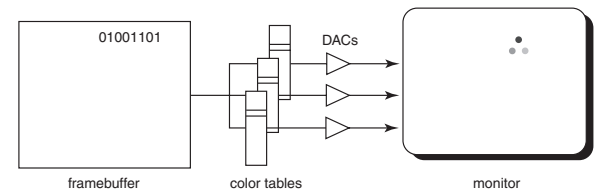


Each framebuffer element is now an index into the color table, where the actual values of each channel are stored.

- ♦ Color table entries can be changed in software.

16

RGB framebuffer

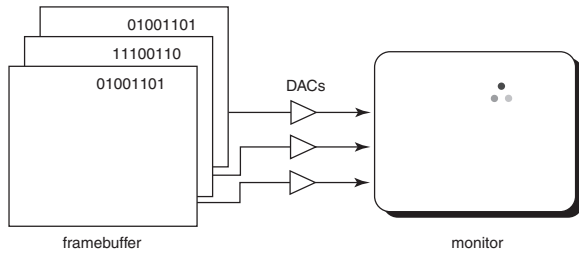


The term **true-color** is sometimes used to refer to systems which the framebuffer directly stores the values of each channel.

As memory prices have fallen, true-color has become fairly standard.

17


Anatomy of an RGB image

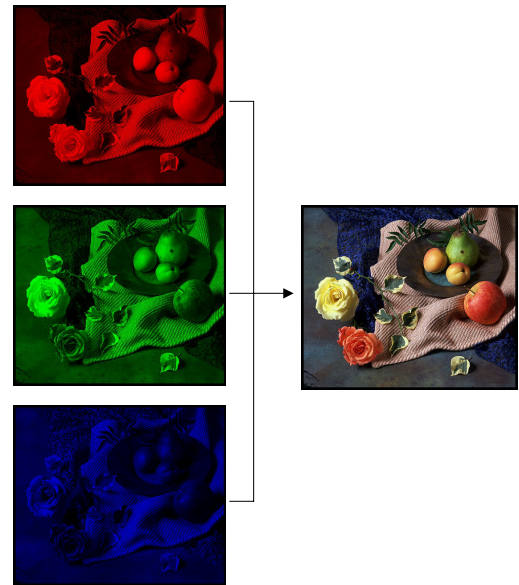

18

Color tables on 24-bit systems

Even full-color systems often use color tables. In this case, there is a separate color table for each 8 bit channel.

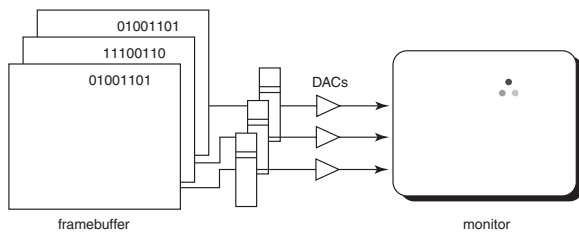


Q: Why would you want this capability?

19

Double-buffering

Q: What happens when you write to the framebuffer while it is being displayed on the monitor?

Double-buffering provides a solution.

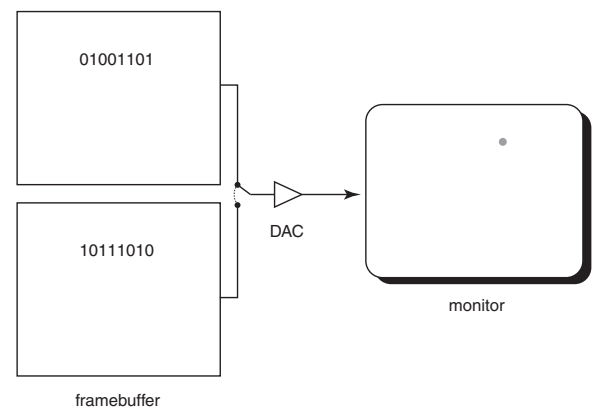

20

Summary

Here's what you should take home from this lecture:

- ◆ All of the **boldfaced terms**.
- ◆ Sketchpad (1963) was the first interactive graphics system.
- ◆ The basic components of black-and-white and color CRTs.
- ◆ Raster vs. calligraphic displays.
- ◆ The principle operation for an LCD display.
- ◆ Computing screen resolution & framebuffer size.
- ◆ The correspondence between elements of framebuffer memory and pixels on-screen.
- ◆ How color tables and double-buffering work.