

CSE 417 Algorithms and Complexity

Lecture 19, Autumn 2023 Dynamic Programming

11/13/2023

CSE 417

1

Announcements

- Dynamic Programming Reading:
 - 6.1-6.2, Weighted Interval Scheduling
 - 6.4 Knapsack and Subset Sum
 - 6.6 String Alignment
 - 6.7* String Alignment in linear space
 - 6.8 Shortest Paths (again)
 - 6.9 Negative cost cycles
 - How to make an infinite amount of money
- Homework 7

11/13/2023

CSE 417

2

Dynamic Programming

- The most important algorithmic technique covered in CSE 417
- Key ideas
 - Express solution in terms of a polynomial number of sub problems
 - Order sub problems to avoid recomputation

11/13/2023

CSE 417

3

Recursion vs Iteration

```
Factorial(n){  
    if (n <= 1)  
        return 1;  
    else  
        return n*Factorial(n-1);  
}  
  
Factorial(n){  
    v = 1;  
    for (i = 2; i <= n; i++)  
        v = v*i  
    return v;  
}
```

11/13/2023

CSE 417

4

Counting Rabbits

0, 1, 1, 2, 3, 5, 8, 13, 21, 34, 55, 89, 144, 233, 377, 610, 987, 1597, 2584, ...


$$F_0 = 0; \quad F_1 = 1; \quad F_n = F_{n-1} + F_{n-2}$$

```
Fib(n){  
    if (n == 0)  
        return 0;  
    else if (n == 1)  
        return 1;  
    else  
        return Fib(n-1) + Fib(n-2);  
}
```

11/13/2023

CSE 417

5

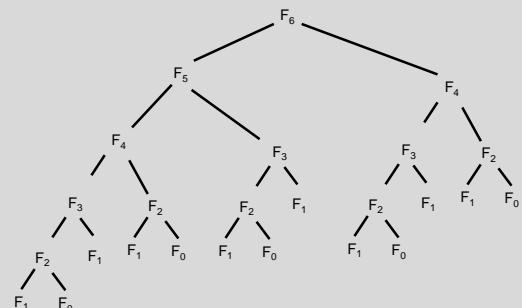


11/13/2023

CSE 417

6

Fibonacci with Memoization

```
Fib(n){  
    if (n = 0)  
        return 0;  
    else if (n = 1)  
        return 1;  
    else  
        return Fib(n-1) + Fib(n-2);  
}
```



11/13/2023

CSE 417

7

Reordering computation

```
Fib(n){  
    int[ ] F = new [n+1]  
  
    F[0] = 0;  
    F[1] = 1;  
    for (i = 2; i <= n; i++)  
        F[i] = F[i-1] + F[i-2];  
    return F[n];  
}
```

11/13/2023


CSE 417

8

Intervals sorted by end time

Dynamic Programming

- Weighted Interval Scheduling
- Given a collection of intervals I_1, \dots, I_n with weights w_1, \dots, w_n , choose a maximum weight set of non-overlapping intervals

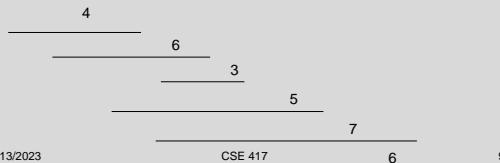

11/13/2023

CSE 417

6

10

Intervals sorted by end time

Optimality Condition

- $\text{Opt}[j]$ is the maximum weight independent set of intervals I_1, I_2, \dots, I_j
- $\text{Opt}[j] = \max(\text{Opt}[j-1], w_j + \text{Opt}[p[j]])$
 - Where $p[j]$ is the index of the last interval which finishes before I_j starts

11/13/2023

CSE 417

10

Algorithm

```
MaxValue(j) =  
    if j = 0 return 0  
    else  
        return max( MaxValue(j-1),  
                    wj + MaxValue(p[ j ]) )
```

Worst case run time: 2^n

11/13/2023

CSE 417

11

A better algorithm

```
M[ j ] initialized to -1 before the first recursive call for all j  
  
MaxValue(j) =  
    if j = 0 return 0;  
    else if M[ j ] != -1 return M[ j ];  
    else  
        M[ j ] = max(MaxValue(j-1), wj + MaxValue(p[ j ]));  
        return M[ j ];
```

11/13/2023

CSE 417

12

Iterative Algorithm

```
MaxValue(n){
    int[] M = new int[n+1];

    M[0] = 0;

    for (int i = 1; i <= n; i++){
        M[i] = max(M[i-1], wi + M[p[i]]);
    }

    return M[n];
}
```


11/13/2023

CSE 417

13

Fill in the array with the Opt values

$$\text{Opt}[j] = \max (\text{Opt}[j-1], w_j + \text{Opt}[p[j]])$$

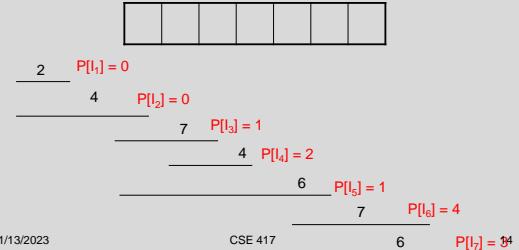


11/13/2023

CSE 417

6

Computing the solution

$\text{Opt}[j] = \max (\text{Opt}[j-1], w_j + \text{Opt}[p[j]])$
Record which case is used in Opt computation

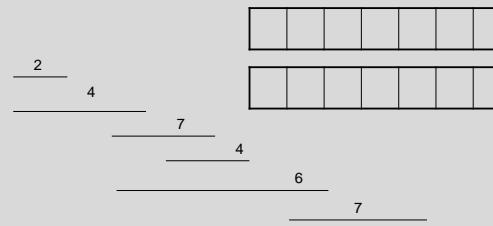

11/13/2023

CSE 417

15

Iterative Algorithm

```
int[] M = new int[n+1];
char[] R = new char[n+1];

M[0] = 0;
for (int j = 1; j < n+1; j++) {
    v1 = M[j-1];
    v2 = w[j] + M[p[j]];
    if (v1 > v2) {
        M[j] = v1;
        R[j] = 'A';
    }
    else {
        M[j] = v2;
        R[j] = 'B';
    }
}
```

11/13/2023

CSE 417

16

Algorithm Summary

- $O(n^2)$ time algorithm for finding maximum weight independent set of intervals
- Key idea: Creating an Opt function to express optimal set of I_1, I_2, \dots, I_k in terms of optimal set of I_1, I_2, \dots, I_{k-1}
- Organize computation to avoid recomputation

11/13/2023

CSE 417

17