



CSE 417

Algorithms and Complexity

Autumn 2023

Lecture 26

Network Flow Applications

Announcements

- Homework 9
- Exam practice problems on course homepage
- Final Exam: Monday, December 11, 8:30 AM
– One Hour Fifty Minutes

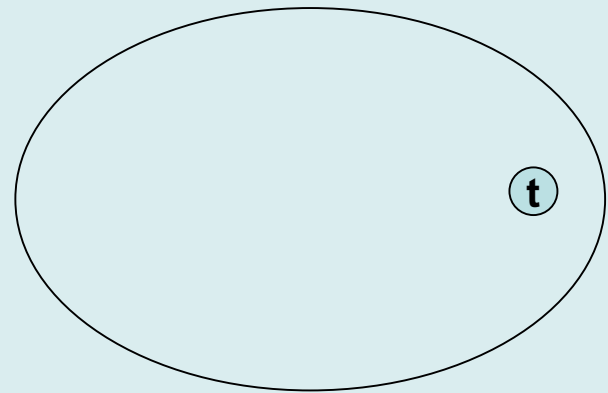
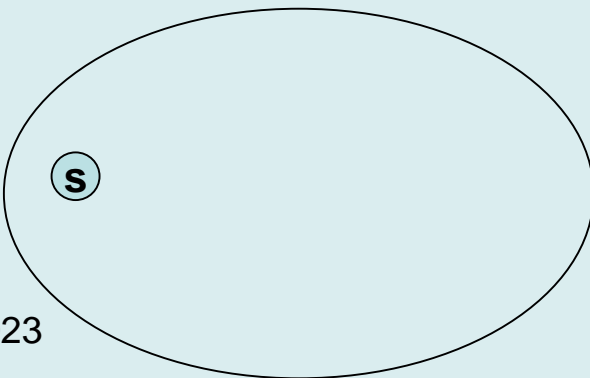
Fri, Dec 1	Net Flow Applications
Mon, Dec 4	Net Flow Applications + NP-Completeness
Wed, Dec 6	NP-Completeness
Fri, Dec 8	NP-Completeness
Mon, Dec 11	Final Exam

Outline


- ~~Network flow definitions~~
- ~~Flow examples~~
- ~~Augmenting Paths~~
- ~~Residual Graph~~
- ~~Ford Fulkerson Algorithm~~
- ~~Cuts~~
- ~~Maxflow-MinCut Theorem~~
- ~~Maxflow Algorithms~~
- Simple applications of Max Flow
- Non-simple applications of Max Flow

Cuts in a graph

- Cut: Partition of V into disjoint sets S , T with s in S and t in T .
- $\text{Cap}(S, T)$: sum of the capacities of edges from S to T
- Problem: Find the s - t Cut with minimum capacity



Max Flow / Min Cut

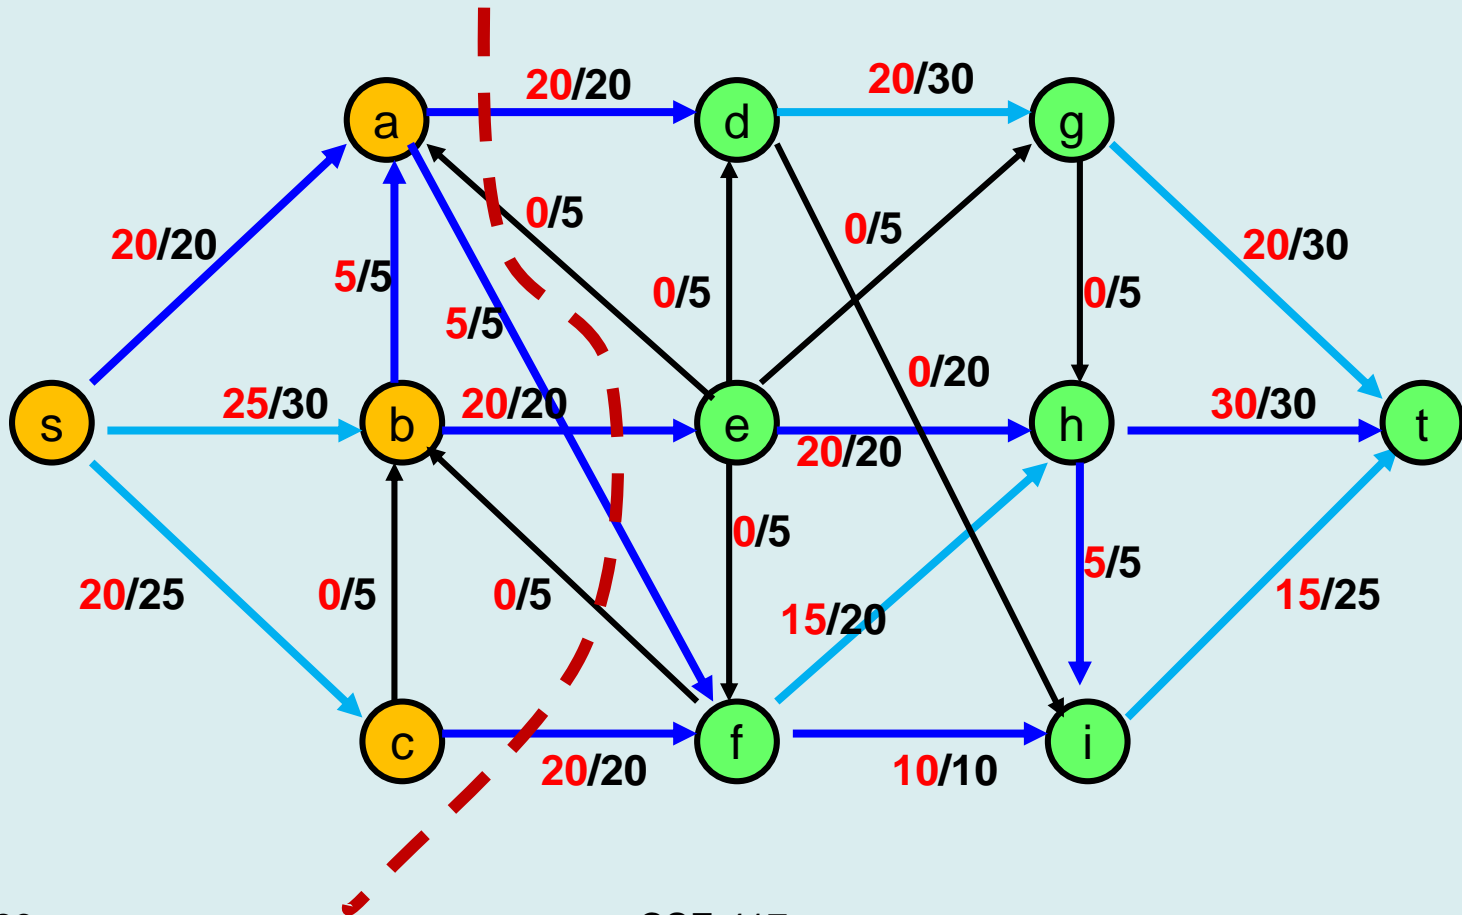

Max Flow - Min Cut Theorem

- There exists a cut S, T such that
$$\text{Flow}(S, T) = \text{Cap}(S, T)$$
- Proof also shows that Ford Fulkerson algorithm finds a maximum flow

Ford Fulkerson Runtime

- Cost per phase \times number of phases
- Phases
 - Capacity leaving source: C
 - Add at least one unit per phase
- Cost per phase
 - Build residual graph: $O(m)$
 - Find s-t path in residual: $O(m)$

Network flow performance

- Ford-Fulkerson algorithm
 - $O(mC)$
- Find the maximum capacity augmenting path
 - $O(m^2 \log(C))$ time algorithm for network flow
- Find the shortest augmenting path
 - $O(m^2n)$ time algorithm for network flow
- Find a blocking flow in the residual graph
 - $O(mn \log n)$ time algorithm for network flow
- Interior Point Methods
 - $O(m + n)$

Problem Reduction

- Reduce Problem A to Problem B
 - Convert an instance of Problem A to an instance of Problem B
 - Use a solution of Problem B to get a solution to Problem A
- Practical
 - Use a program for Problem B to solve Problem A
- Theoretical
 - Show that Problem B is at least as hard as Problem A

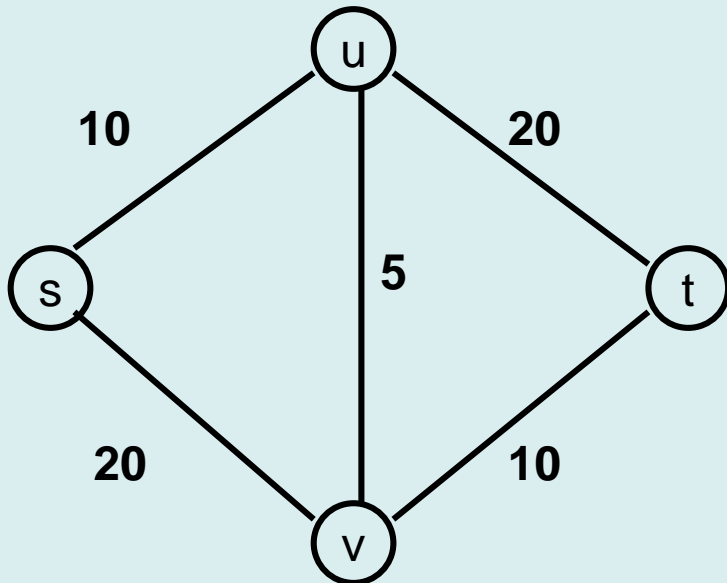
Problem Reduction Examples

- Reduce the problem of finding the Maximum of a set of integers to finding the Minimum of a set of integers

Find the maximum of: 8, -3, 2, 12, 1, -6

Undirected Network Flow

- Undirected graph with edge capacities
- Flow may go either direction along the edges (subject to the capacity constraints)













Bipartite Matching



- A graph $G=(V,E)$ is bipartite if the vertices can be partitioned into disjoint sets X,Y
- A matching M is a subset of the edges that does not share any vertices
- Find a matching as large as possible

Application

- A collection of teachers
- A collection of courses
- And a graph showing which teachers can teach which courses

RA			143
PB			373
ME			414
DG			415
AK			CSE 417 417

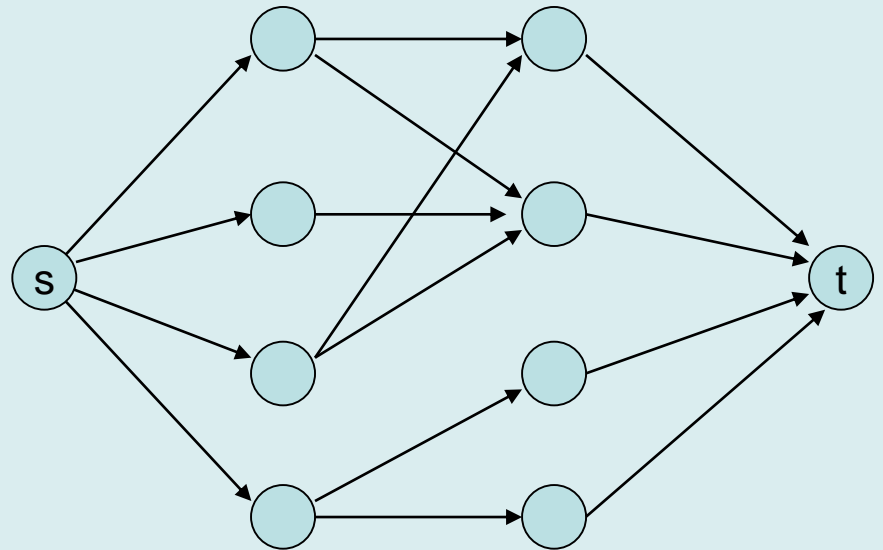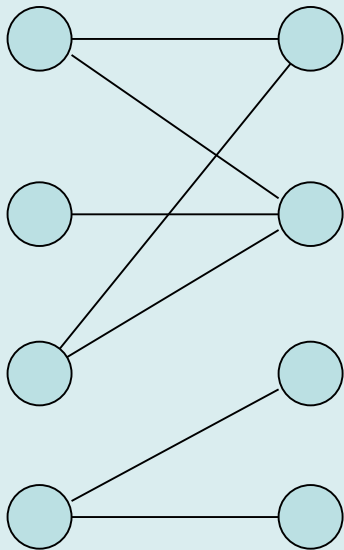Converting Matching to Network Flow



Multi-source network flow

- Multi-source network flow
 - Sources s_1, s_2, \dots, s_k
 - Sinks t_1, t_2, \dots, t_j
- Solve with Single source network flow

Resource Allocation: Assignment of reviewers

- A set of papers P_1, \dots, P_n
- A set of reviewers R_1, \dots, R_m
- Paper P_i requires A_i reviewers
- Reviewer R_j can review B_j papers
- For each reviewer R_j , there is a list of paper L_{j1}, \dots, L_{jk} that R_j is qualified to review

Baseball elimination

- Can the Dinosaurs win the league?
- Remaining games:
 - AB, AC, AD, AD, AD, BC, BC, BC, BD, CD

	W	L
Ants	4	2
Bees	4	2
Cockroaches	3	3
Dinosaurs	1	5

A team **wins** the league if it has strictly more wins than any other team at the end of the season
A team **ties** for first place if no team has more wins, and there is some other team with the same number of wins

Baseball elimination

- Can the Fruit Flies win or tie the league?
- Remaining games:
 - AC, AD, AD, AD, AF,
BC, BC, BC, BC, BC,
BD, BE, BE, BE, BE,
BF, CE, CE, CE, CF,
CF, DE, DF, EF, EF

	W	L
Ants	17	12
Bees	16	7
Cockroaches	16	7
Dinosaurs	14	13
Earthworms	14	10
Fruit Flies	12	15


Assume Fruit Flies win remaining games

- Fruit Flies are tied for first place if no team wins more than 19 games
- Allowable wins
 - Ants (2)
 - Bees (3)
 - Cockroaches (3)
 - Dinosaurs (5)
 - Earthworms (5)
- 18 games to play
 - AC, AD, AD, AD, BC, BC, BC, BC, BC, BD, BE, BE, BE, BE, CE, CE, CE, DE

	W	L
Ants	17	13
Bees	16	8
Cockroaches	16	9
Dinosaurs	14	14
Earthworms	14	12
Fruit Flies	19	15

Remaining games

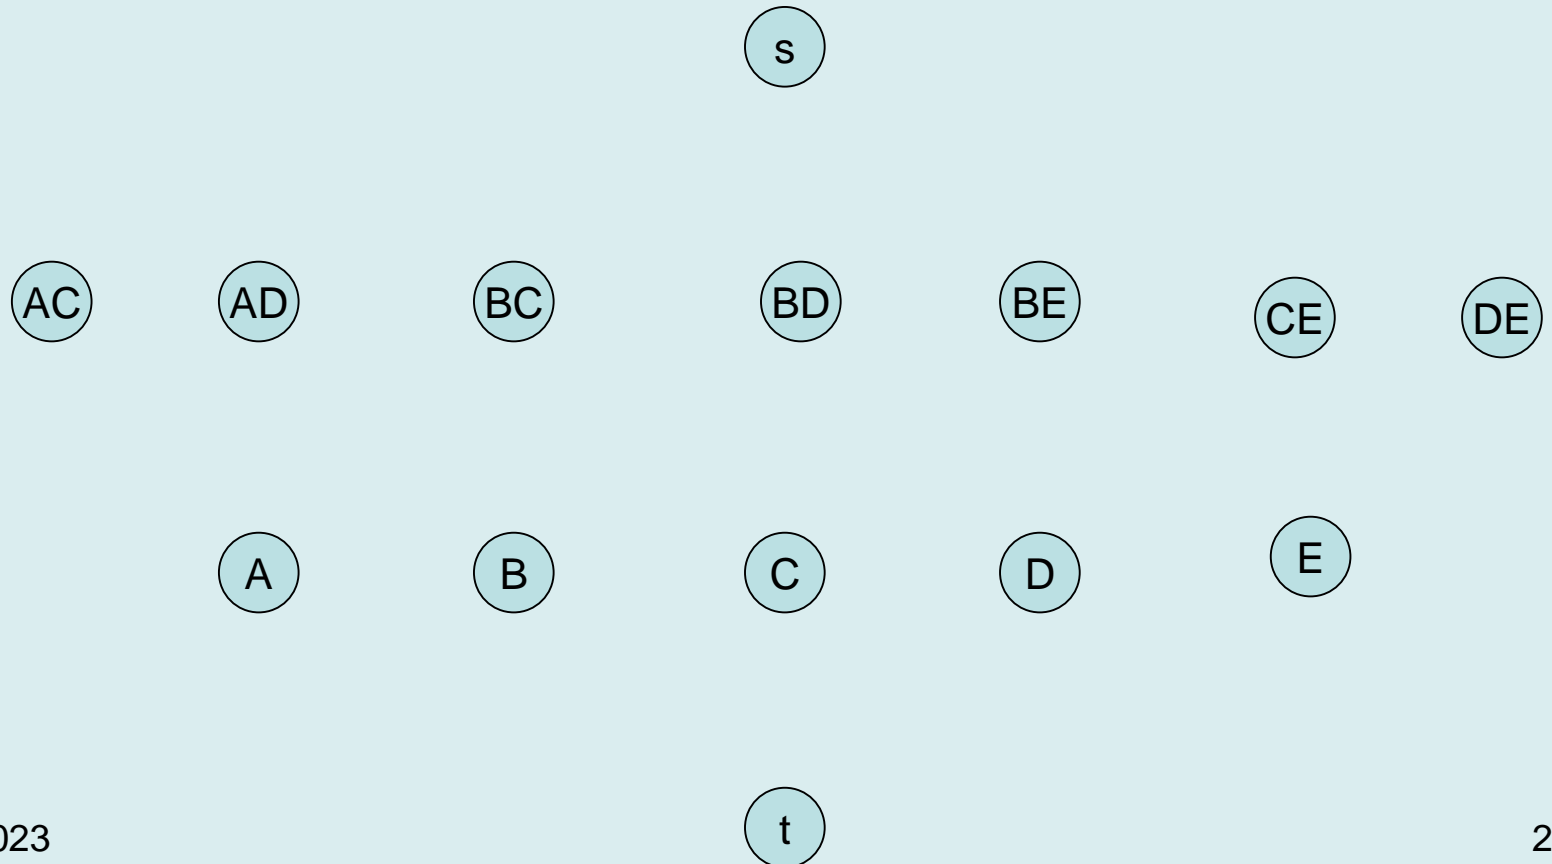AC, AD, AD, AD, BC, BC, BC, BC, BC, BD, BE, BE, BE, BE, CE, CE, CE, DE



Minimum Cut Applications

- Image Segmentation
- Open Pit Mining / Task Selection Problem
- Reduction to Min Cut problem

S, T is a cut if S, T is a partition of the vertices with s in S and t in T

The capacity of an S, T cut is the sum of the capacities of all edges going from S to T

Image Segmentation

- Separate foreground from background

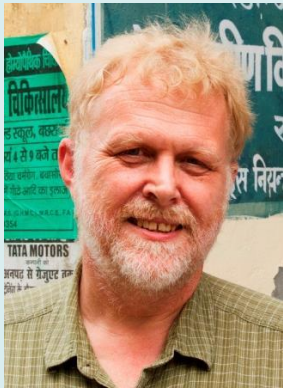



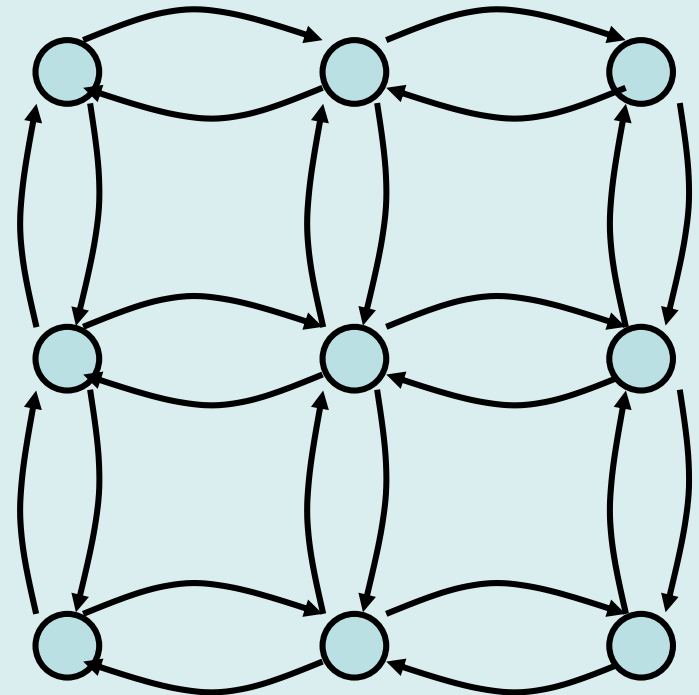


Image analysis

- a_i : value of assigning pixel i to the foreground
- b_j : value of assigning pixel j to the background
- p_{ij} : penalty for assigning i to the foreground, j to the background or vice versa
- A : foreground, B : background
- $Q(A,B) = \sum_{\{i \text{ in } A\}} a_i + \sum_{\{j \text{ in } B\}} b_j - \sum_{\{(i,j) \text{ in } E, i \text{ in } A, j \text{ in } B\}} p_{ij}$

Pixel graph to flow graph

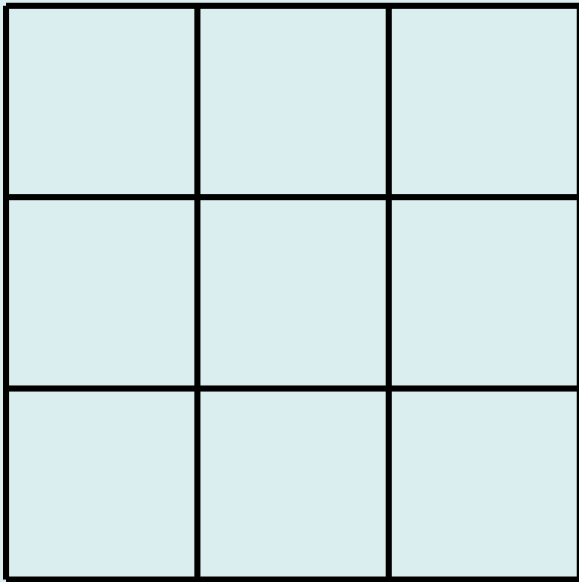s



t

Mincut Construction

