

# CSE 417 Algorithms and Complexity

Lecture 19, Winter 2023  
Dynamic Programming, Part II

2/22/2023

CSE 417

1

## Announcements

- Dynamic Programming Reading:
  - 6.1-6.2, Weighted Interval Scheduling
  - 6.4 Knapsack and Subset Sum
  - 6.6 String Alignment
    - 6.7\* String Alignment in linear space
  - 6.8 Shortest Paths (again)
  - 6.9 Negative cost cycles
    - How to make an infinite amount of money

2/22/2023

CSE 417

2

## Key Ideas for Dynamic Programming

- Give a recursive solution for the problem in terms of optimizing and objective function
- Order subproblems to avoid duplicate computation
- Determine the elements that form the solution

2/22/2023


CSE 417

3

Intervals sorted by end time

## Weighted Interval Scheduling

- Given a collection of intervals  $I_1, \dots, I_n$  with weights  $w_1, \dots, w_n$ , choose a maximum weight set of non-overlapping intervals

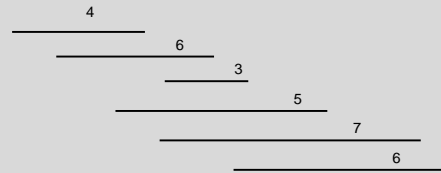


2/22/2023

Intervals sorted by end time

## Recursive Solution

Express the solution to a problem of size  $n$  in terms of solutions to problems of size  $k$ , where  $k < n$

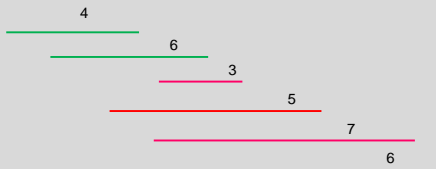

Intervals sorted by end time

## Optimality Condition

- $\text{Opt}[j]$  is the maximum weight independent set of intervals  $I_1, I_2, \dots, I_j$
- $\text{Opt}[j] = \max(\text{Opt}[j-1], w_j + \text{Opt}[p[j]])$ 
  - Where  $p[j]$  is the index of the last interval which finishes before  $I_j$  starts
- Convert to iterative algorithm to compute:  $\text{Opt}[1], \text{Opt}[2], \text{Opt}[3], \dots, \text{Opt}[n-1], \text{Opt}[n]$

2/22/2023

CSE 417

6

## Iterative Algorithm

```
MaxValue(n){
  int[] M = new int[n+1];
  M[0] = 0;
  for (int i = 1; i <= n; i++){
    M[i] = max(M[i-1], wi + M[p[i]]);
  }
  return M[n];
}
```

2/22/2023

CSE 417

7

## How many different ways can I walk to work?


Only taking "efficient" routes

Make the problem discrete


Directed Graph model:  
Intersections and streets

Assume the graph is a  
directed acyclic graph (DAG)

Problem: compute the number  
of paths from vertex  $h$  to  
vertex  $w$

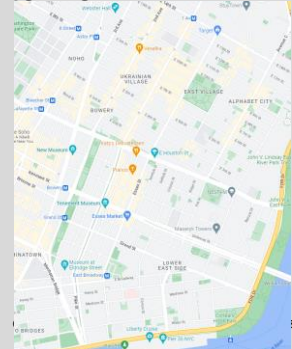

## $P[v]$ : Number of paths from $v$ to $v_0$



How do you compute  
 $P[v]$  if you know  $P[x]$ ,  
 $P[y]$ , and  $P[z]$ ?


2/22/2023

CSE 417

9

## Recursive Algorithm

```
PC(v){
  if (v == v0)
    return 1;
  count = 0;
  foreach (w in N+(v)){
    count = count + PC(w);
  }
  return count;
}
```



2/22/2023

CSE 417

10

## Ordering the vertices

How do you order the vertices of a DAG  
such that if there is an edge from  $v$  to  $w$ ,  
 $w$  comes before  $v$  in the ordering?

2/22/2023

CSE 417

11

## Path Counting

$G=(V,E)$  is an  $n$  node directed acyclic graph, with  $v_{n-1}, v_{n-2}, \dots, v_1, v_0$  a topological order of the vertices. An array is computed giving the number of paths from each vertex to  $v_0$ .

```
CountPaths(G, P){
  P[0] = 1;
  for (i = 1 to n-1){
    P[i] = 0;
    foreach (w in N+(vi)){
      P[i] = P[i] + P[w];
    }
  }
}
```

2/22/2023

CSE 417

12

## Typesetting

- Layout text on a page to optimize readability and aesthetic measures
- Skilled profession replaced by computing
- Goal – give text a uniform appearance which is primarily done by choosing line breaks to balance white space
  - Interword spacing can stretch or shrink
  - Hyphenation is sometimes available

2/22/2023

CSE 417

13

## Optimal line breaking

Element distinctness has been a particular focus of lower bound analysis. The first time-space tradeoff lower bounds for the problem apply to structured algorithms. Borodin et al. [13] gave a time-space tradeoff lower bound for computing  $ED$  on comparison branching programs of  $T \in \Omega(n^{3/2}/S^{1/2})$  and, since  $S \geq \log_2 n$ ,  $T \in \Omega(n^{3/2}\sqrt{\log n}/S)$ . Yao [32] improved this to a near-optimal  $T \in \Omega(n^{2-\epsilon(n)}/S)$ , where  $\epsilon(n) = 5/(\ln n)^{1/2}$ . Since these lower bounds apply to the average case for randomly ordered inputs, by Yao's lemma, they also apply to randomized comparison branching programs. These bounds also trivially apply to all frequency moments since, for  $k \neq 1$ ,  $ED(x) = n$  iff  $F_k(x) = n$ . This near-quadratic lower bound seemed to suggest that the complexity of  $ED$  and  $F_k$  should closely track that of sorting.

## Optimal Line Breaking

- Words have length  $w_i$ , line length  $L$
- Penalty related to white space or overflow of the line
  - Quadratic measure often used
- $\text{Pen}(i, j)$ : Penalty for putting  $w_i, w_{i+1}, \dots, w_j$  on the same line
- $\text{Opt}[m]$ : minimum penalty for ending a line with  $w_m$

The quick brown  
fox jumped over  
the lazy dog.

The quick brown  
fox jumped  
over the lazy dog.

$\text{Pen}(\text{"The quick brown"}) = 1$   
 $\text{Pen}(\text{"fox jumped over"}) = 2$   
 $\text{Pen}(\text{"fox jumped"}) = 8$   
 $\text{Pen}(\text{"the lazy dog"}) = 6$   
 $\text{Pen}(\text{"over the lazy dog."}) = 4$

$\text{Pen}(i, j)$ : Penalty for putting  $w_i, w_{i+1}, \dots, w_j$  on the same line

2/22/2023

CSE 417

16

## Optimal Line Breaking

Optimal score for ending a line with  $w_m$

$\text{Opt}[m] = \min_i \{ \text{Opt}[i] + \text{Pen}(i+1, m) \}$  for  $0 < i < m$

For words  $w_1, w_2, \dots, w_n$ , we compute  $\text{Opt}[n]$  to find the optimal layout

## Optimal Line Breaking

```
Opt[0] = 0;
for m = 1 to n {
  Find i that minimizes Opt[i] + Pen(i+1, m);
  Opt[m] = Opt[i] + Pen(i+1, m);
  Pred[m] = i;
}
```

2/22/2023

CSE 417

18