


# LOGICAL AGENTS

## CHAPTER 7

### Outline

- ◇ Knowledge-based agents
- ◇ Wumpus world
- ◇ Logic in general—models and entailment
- ◇ Propositional (Boolean) logic
- ◇ Equivalence, validity, satisfiability
- ◇ Inference rules and theorem proving
  - forward chaining
  - backward chaining
  - resolution

### Knowledge bases



Knowledge base = set of sentences in a formal language

Declarative approach to building an agent (or other system):

TELL it what it needs to know

Then it can ASK itself what to do—answers should follow from the KB

Agents can be viewed at the knowledge level

i.e., what they know, regardless of how implemented

Or at the implementation level

i.e., data structures in KB and algorithms that manipulate them

### A simple knowledge-based agent

```

function KB-AGENT(percept) returns an action
  static: KB, a knowledge base
         t, a counter, initially 0, indicating time
  TELL(KB, MAKE-PERCEPT-SENTENCE(percept, t))
  action ← ASK(KB, MAKE-ACTION-QUERY(t))
  TELL(KB, MAKE-ACTION-SENTENCE(action, t))
  t ← t + 1
  return action
    
```

The agent must be able to:

- Represent states, actions, etc.
- Incorporate new percepts
- Update internal representations of the world
- Deduce hidden properties of the world
- Deduce appropriate actions

### Wumpus World PEAS description

Performance measure

gold +1000, death -1000

-1 per step, -10 for using the arrow

Environment

Squares adjacent to wumpus are smelly

Squares adjacent to pit are breezy


Glitter iff gold is in the same square

Shooting kills wumpus if you are facing it

Shooting uses up the only arrow

Grabbing picks up gold if in same square

Releasing drops the gold in same square



Actuators Left turn, Right turn,

Forward, Grab, Release, Shoot

Sensors Breeze, Glitter, Smell

### Wumpus world characterization

Observable??

### Wumpus world characterization

Observable?? No—only local perception

Deterministic??

Chapter 7 7

### Wumpus world characterization

Observable?? No—only local perception

Deterministic?? Yes—outcomes exactly specified

Episodic?? No—sequential at the level of actions

Static?? Yes—Wumpus and Pits do not move

Discrete??

Chapter 7 10

### Wumpus world characterization

Observable?? No—only local perception

Deterministic?? Yes—outcomes exactly specified

Episodic??

Chapter 7 8

### Wumpus world characterization

Observable?? No—only local perception

Deterministic?? Yes—outcomes exactly specified

Episodic?? No—sequential at the level of actions

Static?? Yes—Wumpus and Pits do not move

Discrete?? Yes

Single-agent??

Chapter 7 11

### Wumpus world characterization

Observable?? No—only local perception

Deterministic?? Yes—outcomes exactly specified

Episodic?? No—sequential at the level of actions

Static??

Chapter 7 9

### Wumpus world characterization

Observable?? No—only local perception

Deterministic?? Yes—outcomes exactly specified

Episodic?? No—sequential at the level of actions


Static?? Yes—Wumpus and Pits do not move

Discrete?? Yes


Single-agent?? Yes—Wumpus is essentially a natural feature

Chapter 7 12


Exploring a wumpus world

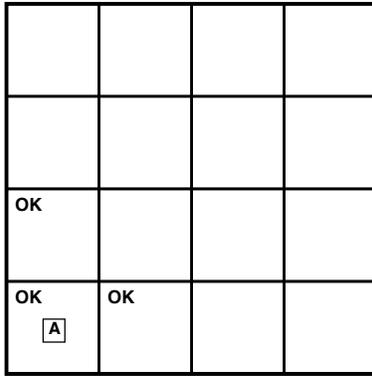


Exploring a wumpus world

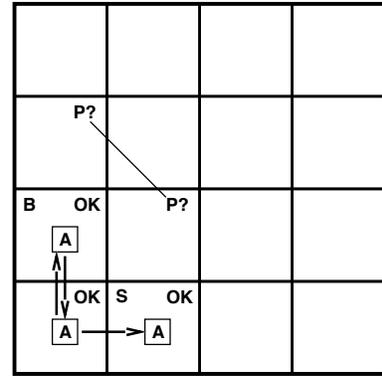


Exploring a wumpus world

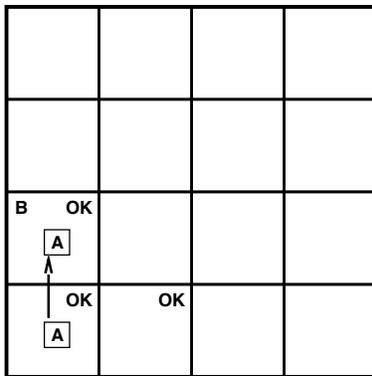


Exploring a wumpus world

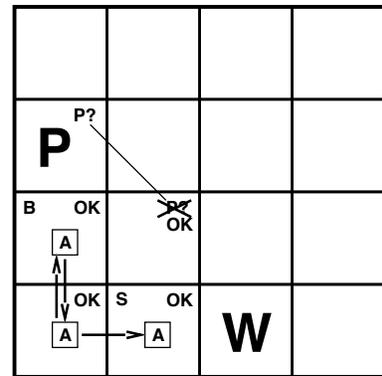


Exploring a wumpus world

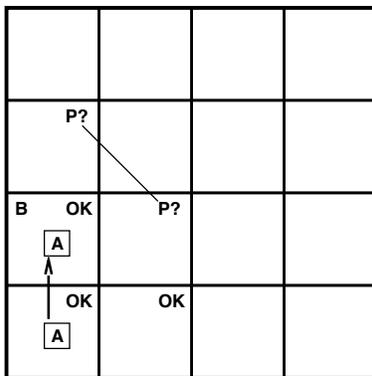

Exploring a wumpus world

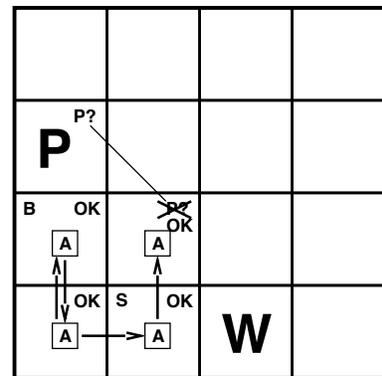

## Exploring a wumpus world

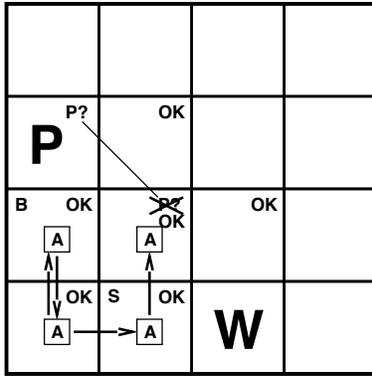

Chapter 7 19

## Logic in general

Logics are formal languages for representing information such that conclusions can be drawn

Syntax defines the sentences in the language

Semantics define the "meaning" of sentences; i.e., define **truth** of a sentence in a world

E.g., the language of arithmetic

$x + 2 \geq y$  is a sentence;  $x2 + y >$  is not a sentence


$x + 2 \geq y$  is true iff the number  $x + 2$  is no less than the number  $y$

$x + 2 \geq y$  is true in a world where  $x=7, y=1$

$x + 2 \geq y$  is false in a world where  $x=0, y=6$

Chapter 7 22

## Exploring a wumpus world

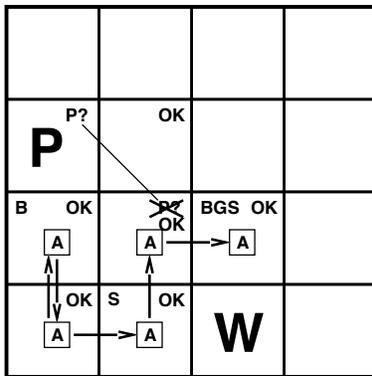

Chapter 7 20

## Entailment

Entailment means that one thing **follows from** another:

$$KB \models \alpha$$

Knowledge base  $KB$  entails sentence  $\alpha$  if and only if

$\alpha$  is true in all worlds where  $KB$  is true

E.g., the KB containing "the Giants won" and "the Reds won" entails "Either the Giants won or the Reds won"


E.g.,  $x + y = 4$  entails  $4 = x + y$

Entailment is a relationship between sentences (i.e., **syntax**) that is based on **semantics**

Note: brains process **syntax** (of some sort)

Chapter 7 23

## Other tight spots



Breeze in (1,2) and (2,1)  
 $\Rightarrow$  no safe actions

Assuming pits uniformly distributed,  
 (2,2) has pit w/ prob 0.86, vs. 0.31

Smell in (1,1)


$\Rightarrow$  cannot move

Can use a strategy of **coercion**:

shoot straight ahead

wumpus was there  $\Rightarrow$  dead  $\Rightarrow$  safe

wumpus wasn't there  $\Rightarrow$  safe



Chapter 7 21

## Models


Logicians typically think in terms of **models**, which are formally structured worlds with respect to which truth can be evaluated

We say  $m$  is a model of a sentence  $\alpha$  if  $\alpha$  is true in  $m$

$M(\alpha)$  is the set of all models of  $\alpha$

Then  $KB \models \alpha$  if and only if  $M(KB) \subseteq M(\alpha)$


E.g.  $KB =$  Giants won and Reds won  
 $\alpha =$  Giants won

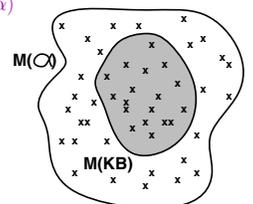

Chapter 7 24

## Entailment in the wumpus world


Situation after detecting nothing in [1,1],  
moving right, breeze in [2,1]

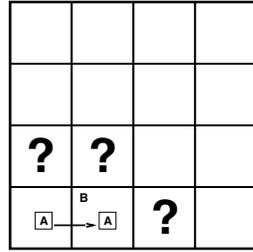

Consider possible models for ?s  
assuming only pits

3 Boolean choices  $\Rightarrow$  8 possible models


## Wumpus models

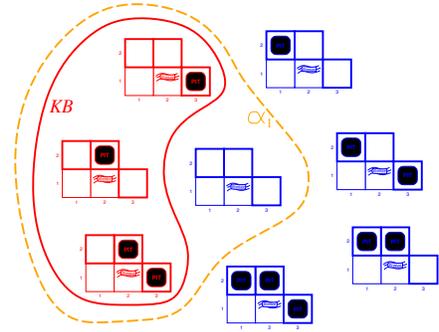


$KB$  = wumpus-world rules + observations

$\alpha_1$  = "[1,2] is safe",  $KB \models \alpha_1$ , proved by model checking

## Wumpus models

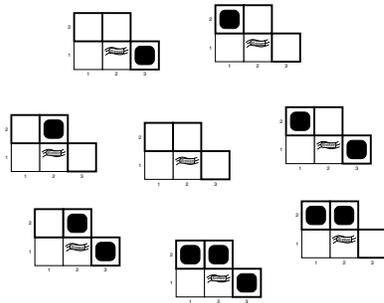


## Wumpus models

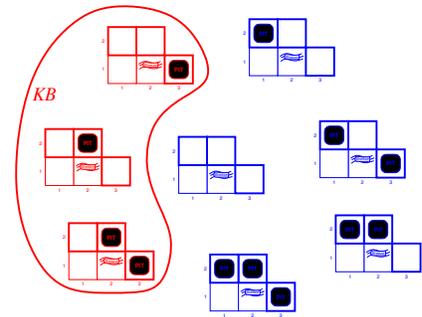


$KB$  = wumpus-world rules + observations

## Wumpus models

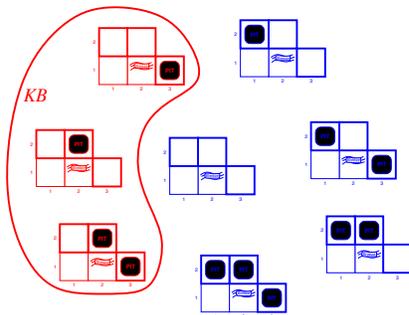

$KB$  = wumpus-world rules + observations

## Wumpus models

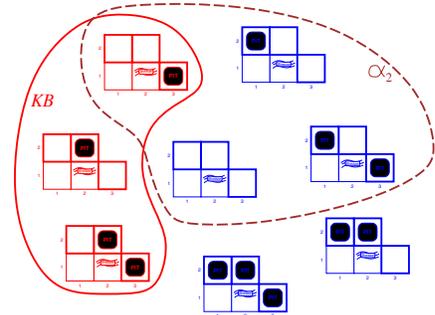

$KB$  = wumpus-world rules + observations

$\alpha_2$  = "[2,2] is safe",  $KB \not\models \alpha_2$

## Inference

$KB \vdash_i \alpha$  = sentence  $\alpha$  can be derived from  $KB$  by procedure  $i$

Consequences of  $KB$  are a haystack;  $\alpha$  is a needle.

Entailment = needle in haystack; inference = finding it

**Soundness:**  $i$  is sound if

whenever  $KB \vdash_i \alpha$ , it is also true that  $KB \models \alpha$

**Completeness:**  $i$  is complete if

whenever  $KB \models \alpha$ , it is also true that  $KB \vdash_i \alpha$

Preview: we will define a logic (first-order logic) which is expressive enough to say almost anything of interest, and for which there exists a sound and complete inference procedure.

That is, the procedure will answer any question whose answer follows from what is known by the  $KB$ .

## Truth tables for connectives

$P$	$Q$	$\neg P$	$P \wedge Q$	$P \vee Q$	$P \Rightarrow Q$	$P \Leftrightarrow Q$
false	false	true	false	false	true	true
false	true	true	false	true	true	false
true	false	false	false	true	false	false
true	true	false	true	true	true	true

## Propositional logic: Syntax

Propositional logic is the simplest logic—illustrates basic ideas

The proposition symbols  $P_1, P_2$  etc are sentences

If  $S$  is a sentence,  $\neg S$  is a sentence (**negation**)

If  $S_1$  and  $S_2$  are sentences,  $S_1 \wedge S_2$  is a sentence (**conjunction**)

If  $S_1$  and  $S_2$  are sentences,  $S_1 \vee S_2$  is a sentence (**disjunction**)

If  $S_1$  and  $S_2$  are sentences,  $S_1 \Rightarrow S_2$  is a sentence (**implication**)

If  $S_1$  and  $S_2$  are sentences,  $S_1 \Leftrightarrow S_2$  is a sentence (**biconditional**)

## Wumpus world sentences

Let  $P_{i,j}$  be true if there is a pit in  $[i, j]$ .

Let  $B_{i,j}$  be true if there is a breeze in  $[i, j]$ .

$\neg P_{1,1}$

$\neg B_{1,1}$

$B_{2,1}$

"Pits cause breezes in adjacent squares"

## Propositional logic: Semantics

Each model specifies true/false for each proposition symbol

E.g.  $P_{1,2} \ P_{2,2} \ P_{3,1}$   
*true true false*

(With these symbols, 8 possible models, can be enumerated automatically.)

Rules for evaluating truth with respect to a model  $m$ :

$\neg S$  is true iff  $S$  is false  
 $S_1 \wedge S_2$  is true iff  $S_1$  is true **and**  $S_2$  is true  
 $S_1 \vee S_2$  is true iff  $S_1$  is true **or**  $S_2$  is true  
 $S_1 \Rightarrow S_2$  is true iff  $S_1$  is false **or**  $S_2$  is true  
 i.e., is false iff  $S_1$  is true **and**  $S_2$  is false  
 $S_1 \Leftrightarrow S_2$  is true iff  $S_1 \Rightarrow S_2$  is true **and**  $S_2 \Rightarrow S_1$  is true

Simple recursive process evaluates an arbitrary sentence, e.g.,

$\neg P_{1,2} \wedge (P_{2,2} \vee P_{3,1}) = \text{true} \wedge (\text{false} \vee \text{true}) = \text{true} \wedge \text{true} = \text{true}$

## Wumpus world sentences

Let  $P_{i,j}$  be true if there is a pit in  $[i, j]$ .

Let  $B_{i,j}$  be true if there is a breeze in  $[i, j]$ .

$\neg P_{1,1}$

$\neg B_{1,1}$

$B_{2,1}$

"Pits cause breezes in adjacent squares"

$B_{1,1} \Leftrightarrow (P_{1,2} \vee P_{2,1})$

$B_{2,1} \Leftrightarrow (P_{1,1} \vee P_{2,2} \vee P_{3,1})$

"A square is breezy **if and only if** there is an adjacent pit"

## Truth tables for inference

$B_{1,1}$	$B_{2,1}$	$P_{1,1}$	$P_{1,2}$	$P_{2,1}$	$P_{2,2}$	$P_{3,1}$	$R_1$	$R_2$	$R_3$	$R_4$	$R_5$	$KB$
false	true	true	true	true	false	false						
false	false	false	false	false	false	true	true	true	false	true	false	false
:	:	:	:	:	:	:	:	:	:	:	:	:
false	true	false	false	false	false	false	true	true	false	true	true	false
false	true	false	false	false	false	true	true	true	true	true	true	true
false	true	false	false	false	true	false	true	true	true	true	true	true
false	true	false	false	false	true	true	true	true	true	true	true	true
false	true	false	false	true	false	false	true	false	false	true	true	false
:	:	:	:	:	:	:	:	:	:	:	:	:
true	false	true	true	false	true	false						

Enumerate rows (different assignments to symbols),  
if  $KB$  is true in row, check that  $\alpha$  is too

## Validity and satisfiability

A sentence is **valid** if it is true in **all** models,  
e.g.,  $True$ ,  $A \vee \neg A$ ,  $A \Rightarrow A$ ,  $(A \wedge (A \Rightarrow B)) \Rightarrow B$

Validity is connected to inference via the **Deduction Theorem**:  
 $KB \models \alpha$  if and only if  $(KB \Rightarrow \alpha)$  is valid

A sentence is **satisfiable** if it is true in **some** model  
e.g.,  $A \vee B$ ,  $C$

A sentence is **unsatisfiable** if it is true in **no** models  
e.g.,  $A \wedge \neg A$

Satisfiability is connected to inference via the following:  
 $KB \models \alpha$  if and only if  $(KB \wedge \neg \alpha)$  is unsatisfiable  
i.e., prove  $\alpha$  by *reductio ad absurdum*

## Inference by enumeration

Depth-first enumeration of all models is sound and complete

```

function TT-ENTAILS?(KB,  $\alpha$ ) returns true or false
  inputs: KB, the knowledge base, a sentence in propositional logic
          $\alpha$ , the query, a sentence in propositional logic
  symbols  $\leftarrow$  a list of the proposition symbols in KB and  $\alpha$ 
  return TT-CHECK-ALL(KB,  $\alpha$ , symbols, [])

function TT-CHECK-ALL(KB,  $\alpha$ , symbols, model) returns true or false
  if EMPTY?(symbols) then
    if PL-TRUE?(KB, model) then return PL-TRUE?( $\alpha$ , model)
    else return true
  else do
    P  $\leftarrow$  FIRST(symbols); rest  $\leftarrow$  REST(symbols)
    return TT-CHECK-ALL(KB,  $\alpha$ , rest, EXTEND(P, true, model)) and
           TT-CHECK-ALL(KB,  $\alpha$ , rest, EXTEND(P, false, model))
    
```

$O(2^n)$  for  $n$  symbols; problem is **co-NP-complete**

## Logical equivalence

Two sentences are **logically equivalent** iff true in same models:  
 $\alpha \equiv \beta$  if and only if  $\alpha \models \beta$  and  $\beta \models \alpha$

$(\alpha \wedge \beta) \equiv (\beta \wedge \alpha)$	commutativity of $\wedge$
$(\alpha \vee \beta) \equiv (\beta \vee \alpha)$	commutativity of $\vee$
$((\alpha \wedge \beta) \wedge \gamma) \equiv (\alpha \wedge (\beta \wedge \gamma))$	associativity of $\wedge$
$((\alpha \vee \beta) \vee \gamma) \equiv (\alpha \vee (\beta \vee \gamma))$	associativity of $\vee$
$\neg(\neg\alpha) \equiv \alpha$	double-negation elimination
$(\alpha \Rightarrow \beta) \equiv (\neg\beta \Rightarrow \neg\alpha)$	contraposition
$(\alpha \Rightarrow \beta) \equiv (\neg\alpha \vee \beta)$	implication elimination
$(\alpha \Leftrightarrow \beta) \equiv ((\alpha \Rightarrow \beta) \wedge (\beta \Rightarrow \alpha))$	biconditional elimination
$\neg(\alpha \wedge \beta) \equiv (\neg\alpha \vee \neg\beta)$	De Morgan
$\neg(\alpha \vee \beta) \equiv (\neg\alpha \wedge \neg\beta)$	De Morgan
$(\alpha \wedge (\beta \vee \gamma)) \equiv ((\alpha \wedge \beta) \vee (\alpha \wedge \gamma))$	distributivity of $\wedge$ over $\vee$
$(\alpha \vee (\beta \wedge \gamma)) \equiv ((\alpha \vee \beta) \wedge (\alpha \vee \gamma))$	distributivity of $\vee$ over $\wedge$

## Proof methods

Proof methods divide into (roughly) two kinds:

Application of inference rules

- Legitimate (sound) generation of new sentences from old
- **Proof** = a sequence of inference rule applications
- Can use inference rules as operators in a standard search alg.
- Typically require translation of sentences into a **normal form**

Model checking

- truth table enumeration (always exponential in  $n$ )
- improved backtracking, e.g., Davis-Putnam-Logemann-Loveland
- heuristic search in model space (sound but incomplete)
- e.g., min-conflicts-like hill-climbing algorithms

## Forward and backward chaining

Horn Form (restricted)

KB = **conjunction of Horn clauses**

- Horn clause =
- $\diamond$  proposition symbol; or
- $\diamond$  (conjunction of symbols)  $\Rightarrow$  symbol
- E.g.,  $C \wedge (B \Rightarrow A) \wedge (C \wedge D \Rightarrow B)$

**Modus Ponens** (for Horn Form): complete for Horn KBs


$$\frac{\alpha_1, \dots, \alpha_n, \quad \alpha_1 \wedge \dots \wedge \alpha_n \Rightarrow \beta}{\beta}$$

Can be used with **forward chaining** or **backward chaining**.  
These algorithms are very natural and run in **linear** time

## Forward chaining


Idea: fire any rule whose premises are satisfied in the *KB*,  
add its conclusion to the *KB*, until query is found

$P \Rightarrow Q$   
 $L \wedge M \Rightarrow P$   
 $B \wedge L \Rightarrow M$   
 $A \wedge P \Rightarrow L$   
 $A \wedge B \Rightarrow L$   
 $A$   
 $B$



Chapter 7 43

## Forward chaining example

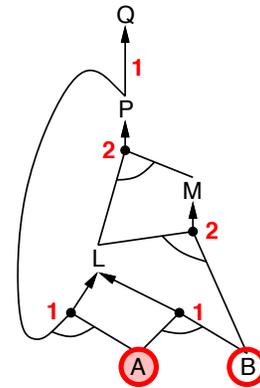

Chapter 7 46

## Forward chaining algorithm


```

function PL-FC-ENTAILS?(KB, q) returns true or false
  inputs: KB, the knowledge base, a set of propositional Horn clauses
         q, the query, a proposition symbol
  local variables: count, a table, indexed by clause, initially the number of premises
                 inferred, a table, indexed by symbol, each entry initially false
                 agenda, a list of symbols, initially the symbols known in KB

  while agenda is not empty do
    p ← POP(agenda)
    unless inferred[p] do
      inferred[p] ← true
      for each Horn clause c in whose premise p appears do
        decrement count[c]
        if count[c] = 0 then do
          if HEAD[c] = q then return true
          PUSH(HEAD[c], agenda)
  return false
    
```


Chapter 7 44

## Forward chaining example

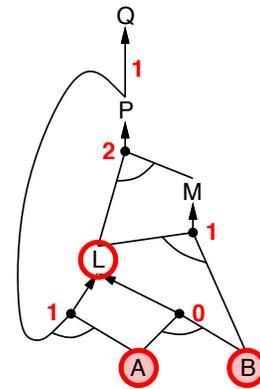


Chapter 7 47

## Forward chaining example

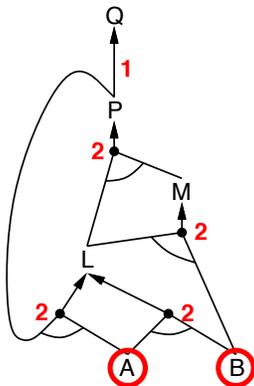


Chapter 7 45

## Forward chaining example

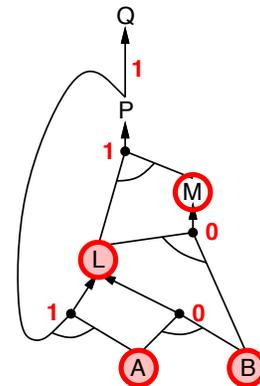


Chapter 7 48


### Forward chaining example

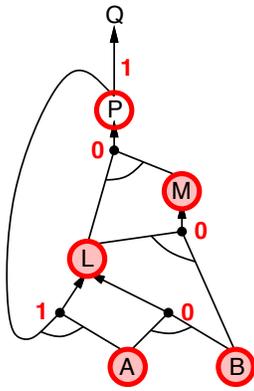

### Forward chaining example

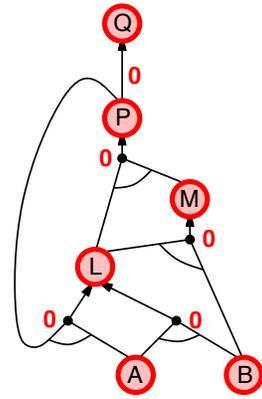

### Forward chaining example

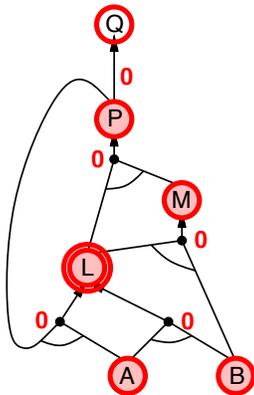


### Proof of completeness

FC derives every atomic sentence that is entailed by  $KB$

1. FC reaches a **fixed point** where no new atomic sentences are derived
2. Consider the final state as a model  $m$ , assigning true/false to symbols
3. Every clause in the original  $KB$  is true in  $m$   
**Proof:** Suppose a clause  $a_1 \wedge \dots \wedge a_k \Rightarrow b$  is false in  $m$   
 Then  $a_1 \wedge \dots \wedge a_k$  is true in  $m$  and  $b$  is false in  $m$   
 Therefore the algorithm has not reached a fixed point!
4. Hence  $m$  is a model of  $KB$
5. If  $KB \models q$ ,  $q$  is true in **every** model of  $KB$ , including  $m$

General idea: construct any model of  $KB$  by sound inference, check  $\alpha$

### Forward chaining example

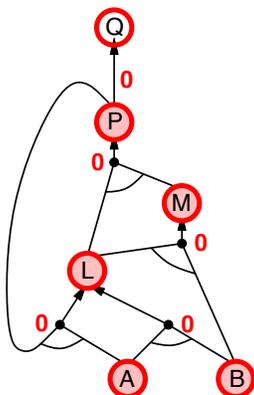

### Backward chaining


Idea: work backwards from the query  $q$ :  
 to prove  $q$  by BC,  
 check if  $q$  is known already, or  
 prove by BC all premises of some rule concluding  $q$

Avoid loops: check if new subgoal is already on the goal stack


Avoid repeated work: check if new subgoal

- 1) has already been proved true, or
- 2) has already failed


Backward chaining example

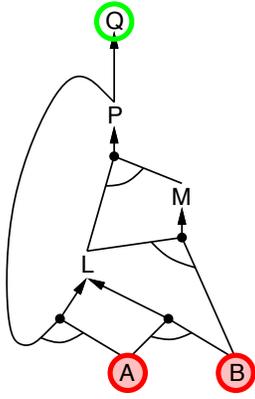


Backward chaining example

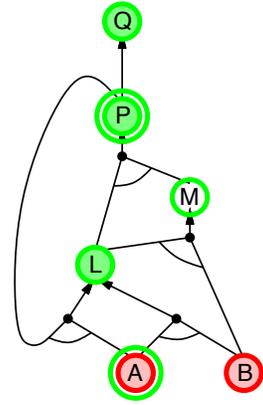


Backward chaining example

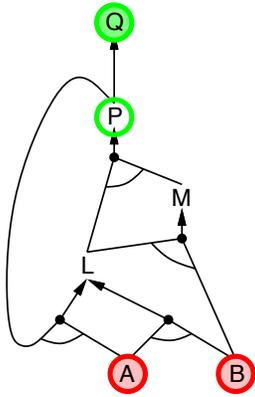


Backward chaining example

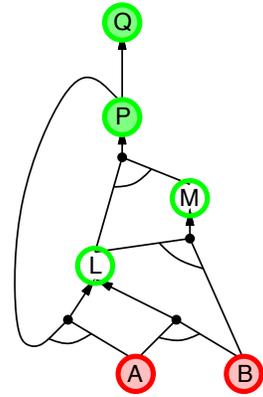


Backward chaining example

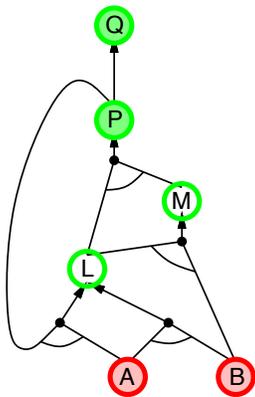

Backward chaining example

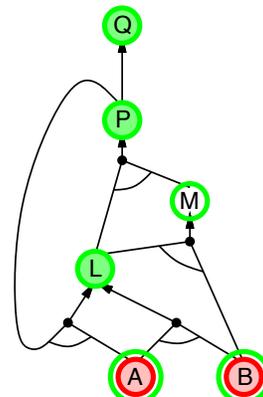


### Backward chaining example

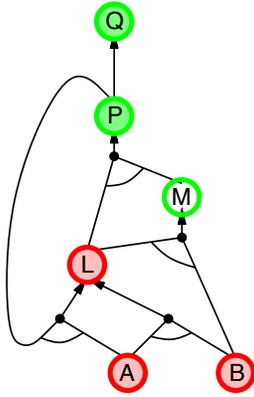


Chapter 7 61

### Backward chaining example

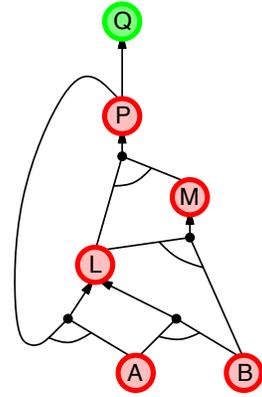


Chapter 7 64

### Backward chaining example

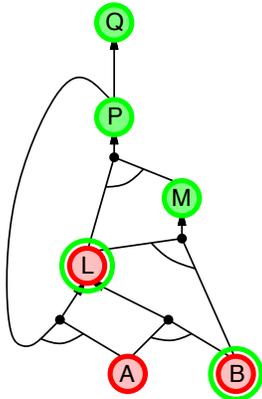


Chapter 7 62

### Backward chaining example

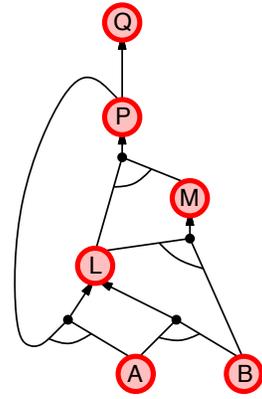

Chapter 7 65

### Backward chaining example

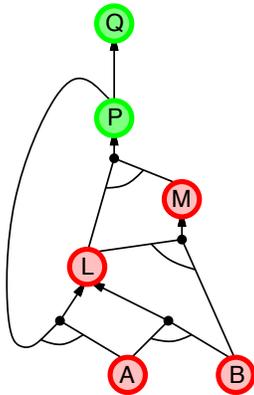

Chapter 7 63

### Forward vs. backward chaining

FC is **data-driven**, cf. automatic, unconscious processing,  
e.g., object recognition, routine decisions

May do lots of work that is irrelevant to the goal

BC is **goal-driven**, appropriate for problem-solving,  
e.g., Where are my keys? How do I get into a PhD program?

Complexity of BC can be **much less** than linear in size of KB

Chapter 7 66

