

6. Application Server Issues for the Project

CSEP 545 Transaction Processing for E-Commerce

Philip A. Bernstein

Copyright ©2003 Philip A. Bernstein

4/25/03

1

Requests


- A request is a message that describes a unit of work for the system to execute.
- An application server coordinates the flow of requests between message sources (displays, applications, etc.) and application programs that run requests as transactions.
- Basic control flow:
 - Translate the display input (form/menu selection, etc.) into a standard-format request
 - Send the request to the appropriate server based on the transaction type in the request header
 - Start the transaction
 - Invoke the transaction type’s application program
 - Commit and send the transaction’s output to the display

4/25/03

2

Application Server Architecture

- App server should make the previous control flow scale up
- Bold lines carry request messages

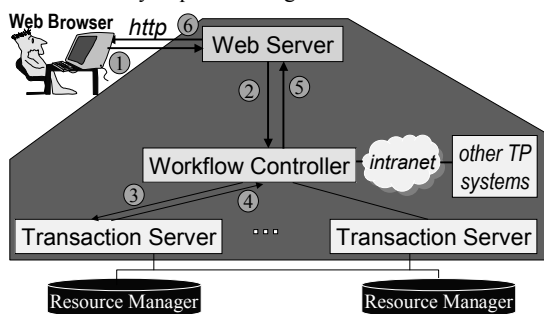

4/25/03

3


Application Server Components

- **Web Browser**
 - A smart device, with forms, menus, input validation
- **Web server**
 - Performs front-end work, e.g., security, data caching,
 - “Calls” the web page associated with the URL, which in turn calls a workflow controller
- **Workflow controller**
 - Calls Start, Commit, and Abort
 - App logic that transforms the request (automatic loan payment, money transfer) into calls on basic objects (loan, account). Sometimes called *business rules*.
- **Transaction server**
 - Business objects (customer, account, loan, teller)
- **Resource Manager** – usually a database (DB) system

4/25/03

4

Project's Process Architecture 1

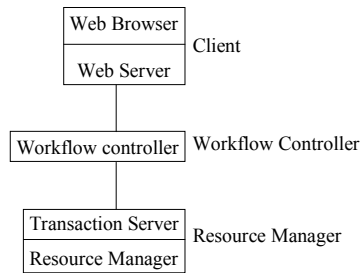

4/25/03

5

Workflow Controller

- For the most part, Workflow Controllers and Transaction Servers are just plain old server programs
- The features that differentiate a Workflow Controller are that it
 - Brackets transactions (issues Start, Commit, and Abort), so that transaction server procedures can execute either as independent transactions or as steps in larger transactions
 - Reports Commits to the client (e.g. web server)
 - Handles Aborts and other failures (e.g. re-runs the transaction)
 - Does not access the DB system, so it need not be close to the DB server

4/25/03

6

Transaction Server

- The features that differentiate a Transaction Server are the inverse of the Workflow Controller, namely that it
 - Does not issue Start, Commit, and Abort (so it can be called either as an independent transaction or as a step in larger transaction)
 - Does not talk directly to the client (e.g., Web Server)
 - Can access the DB system
- In addition, it can call other transaction servers.
- Often, some transaction server code runs as stored procedures inside the DB system.
 - So combining the transaction server and resource manager in the project isn't really an oversimplification.

4/25/03

7


Transaction Manager (TM)

- The TM is the server that supports Start, Commit and Abort.
- It implements two-phase commit.
- This is a major feature of many application servers.
 - 10 years ago, it was the major feature (TM + T-RPC).
 - Supports 2PC across different RMs.
 - So it's useful to have a TM in the application server even though DB products implement 2PC themselves

4/25/03

8

Project's Process Architecture 2

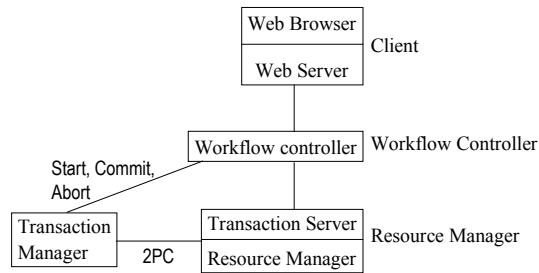

4/25/03

9

Remote Procedure Call (RPC)

- Within a system or intranet, RPC is the most popular form of inter-process communication
- A program calls a remote procedure (in another process) the same way it would call a local procedure
 - This simplifies the message protocol. It's always a call message followed by a return message.
 - It hides certain communications errors.
 - It automates the work of marshaling parameters into and out of the call and return messages.
- There are many implementations of the concept
 - RMI, DCOM, CORBA/IIOP, HTTP, SOAP, ODBC,
- In the project, all inter-process communications is via RPC.

4/25/03

10

Transactional RPC

- *Transactional RPC* is an RPC protocol that implements the necessary plumbing to cope with a caller and/or callee that are running a transaction.
- Ideally, Start returns a transaction ID that's hidden from the caller in a *transaction context*
 - Transactional RPC passes that transaction context as a hidden parameter. It's an easier programming model and avoids errors.
 - When a transaction first arrives at a callee C, C needs to *enlist* with the local transaction manager (TM), so the TM knows to call C during two-phase commit.
 - Also, C needs to execute the call in the context of the transaction that called it.

4/25/03


11

Transactional RPC in the Project

- You are implementing transactional RPC in the project.
 - In steps 6 and 7
 - But the transaction context parameter is explicit (not hidden).

4/25/03

12

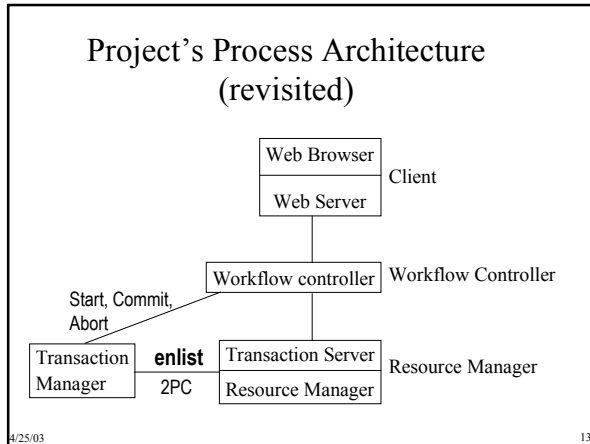

- ### Partitioning Servers
- To add system capacity, add server machines.
 - Sometimes, you can just relocate some server processes to different machines.
 - But if an individual server process overloads one machine, then you need to partition the process.
 - Example – flights, cars, and hotel rooms are managed by one server process. Later, you partition them in separate processes.
 - This implies the WFC has to direct its RPC calls based on resource type
 - To facilitate such changes, the mapping of resource name to server name can be made table-driven.
 - This scenario is developed in step (7) of the project, where multiple RMs are required.
- 4/25/03 14

- ### Parameter-Based Routing
- Sometimes, it's not enough to partition by resource type, because a resource is too popular
 - Example: flights
 - The solution is to partition the popular resource based on value ranges
 - Example – flight number 1-1000 on Server A, flight number 1000-2000 on Server B, etc.
 - This implies that a WFC has to direct its calls based on parameter value (e.g. flight number)
 - To facilitate such changes, the mapping of parameter range to server name can be made table-driven.
 - This is a possible project extension (not required)
- 4/25/03 15

- ### Summary of Concepts
- Workflow controller vs. Transaction Server
 - Remote Procedure Call (RPC)
 - Transactional RPC
 - Transaction Manager
 - Partitioning Servers
 - Parameter-Based Routing
 - There's a lot more to say about Application Servers. We'll return to the topic in a later lecture.
- 4/25/03 16