

Texture Mapping

Brian Curless
CSEP 557
Winter 2013

Reading

Required

- ♦ Angel, 7.4-7.10

Recommended

- ♦ Paul S. Heckbert. Survey of texture mapping. **IEEE Computer Graphics and Applications** 6(11): 56--67, November 1986.

Optional

- ♦ Woo, Neider, & Davis, Chapter 9
- ♦ James F. Blinn and Martin E. Newell. Texture and reflection in computer generated images. **Communications of the ACM** 19(10): 542--547, October 1976.

Texture mapping



Texture mapping (Woo et al., fig. 9-1)


Texture mapping allows you to take a simple polygon and give it the appearance of something much more complex.

- ♦ Due to Ed Catmull, PhD thesis, 1974
- ♦ Refined by Blinn & Newell, 1976





A texture can modulate just about any parameter – diffuse color, specular color, specular exponent, ...

Implementing texture mapping

A texture lives in its own abstract image coordinates parameterized by (s, t) in the range $([0..1], [0..1])$:



It can be wrapped around many different surfaces:



With a ray caster, we can do the sphere and cylinder mappings directly (as we will see later). For z-buffers, everything gets converted to a triangle mesh with associated (s, t) coordinates.

Note: if the surface moves/deforms, the texture goes with it.

Texture coordinates on a surface of revolution


Mapping to texture image coords

The texture is usually stored as an image. Thus, we need to convert from abstract texture coordinate:

$$(s, t) \text{ in the range } ([0..1], [0..1])$$

to texture image coordinates:


$$(s_{tex}, t_{tex}) \text{ in the range } ([0..w_{tex}], [0..h_{tex}])$$

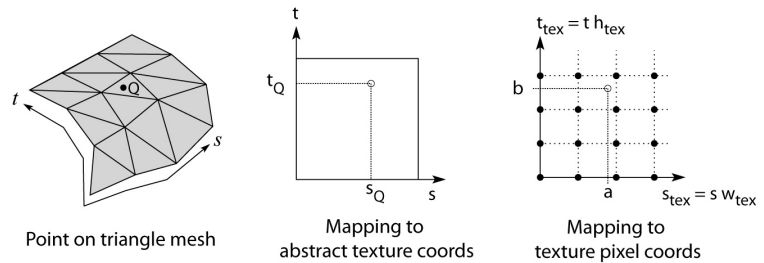

Q: What do you do when the texture sample you need lands between texture pixels?

Texture resampling

We need to resample the texture:

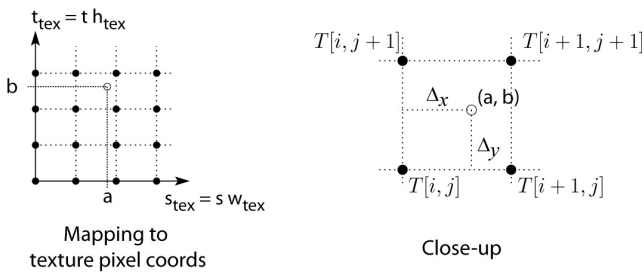

Thus, we seek to solve for: $T(a, b) = T(i + \Delta_x, j + \Delta_y)$

A common choice is **bilinear interpolation**:

$$T(i + \Delta_x, j) = \text{_____} T[i, j] + \text{_____} T[i + 1, j]$$

$$T(i + \Delta_x, j + 1) = \text{_____} T[i, j + 1] + \text{_____} T[i + 1, j + 1]$$

$$T(i + \Delta_x, j + \Delta_y) = \text{_____} T(i + \Delta_x, j) + \text{_____} T(i + \Delta_x, j + 1)$$

$$= \text{_____} T[i, j] + \text{_____} T[i + 1, j] +$$


$$\text{_____} T[i, j + 1] + \text{_____} T[i + 1, j + 1]$$

Texture mapping and the z-buffer

Texture-mapping can also be handled in z-buffer algorithms.

Method:

- Scan conversion is done in screen space, as usual
- Each pixel is colored according to the texture
- Texture coordinates are found by Gouraud-style interpolation

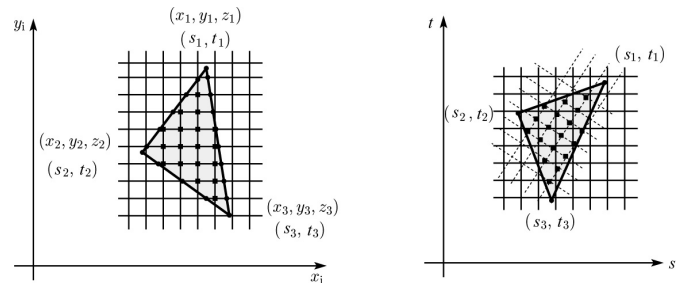


Note: Mapping is more complicated to handle perspective correctly!

Displacement mapping

Textures can be used for more than just color.

In **displacement mapping**, a texture is used to perturb the surface geometry itself. Here's the idea in 2D:

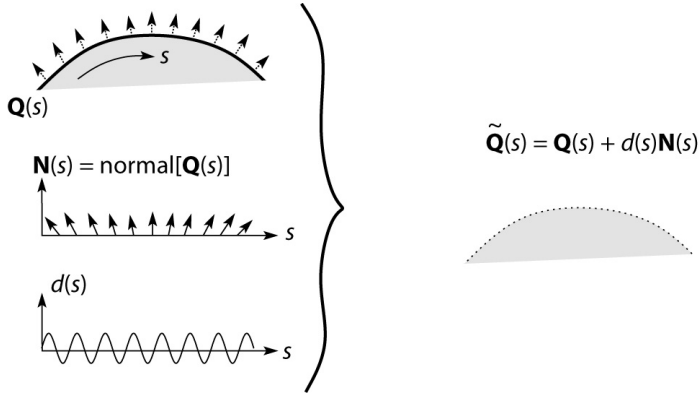

- ◆ These displacements “animate” with the surface
- ◆ In 3D, you would of course have (s,t) parameters instead of just s .


Suppose Q is a simple surface, like a cube. Will it take more work to render the modified surface \tilde{Q} ?

9

Bump mapping

In **bump mapping**, a texture is used to perturb the normal:

- ◆ Use the original, simpler geometry, $Q(s)$, for hidden surfaces
- ◆ Use the normal from the displacement map for shading:

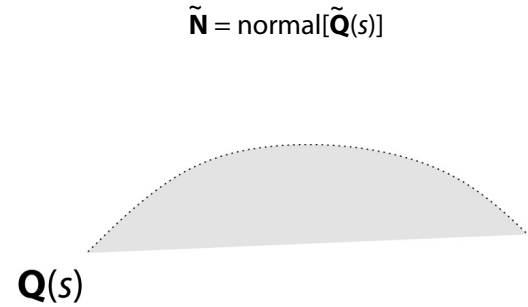


What artifacts in the images would reveal that bump mapping is a fake?


10

Displacement vs. bump mapping


Input texture



Rendered as displacement map over a rectangular surface

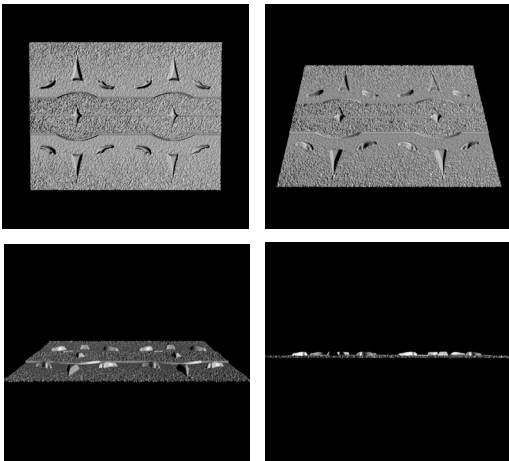

Displacement vs. bump mapping (cont'd)

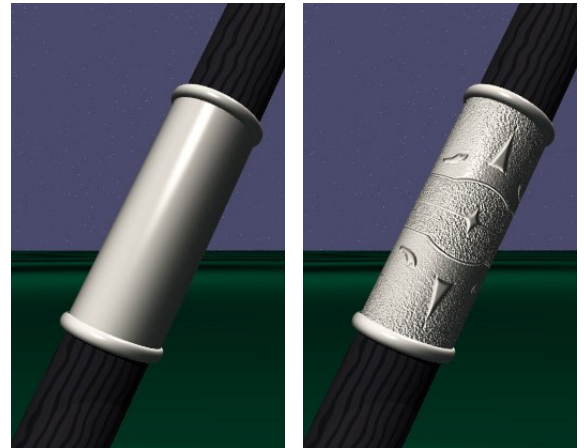

Original rendering

Rendering with bump map wrapped around a cylinder


Bump map and rendering by Wyvern Aldinger

11

12

Solid textures

Q: What kinds of artifacts might you see from using a marble veneer instead of real marble?



One solution is to use **solid textures**:

- ◆ Use model-space coordinates to index into a 3D texture
- ◆ Like “carving” the object from the material

One difficulty of solid texturing is coming up with the textures.

13

Solid textures (cont'd)

Here's an example for a vase cut from a solid marble texture:



Solid marble texture by Ken Perlin, (Foley, IV-21)




14

Solid textures (cont'd)

$in(x,y,z) = stripes(x)$

$shift(x,y,z) = K \cdot noise(x,y,z)$

$out(x,y,z) = stripes(x + shift(x,y,z))$

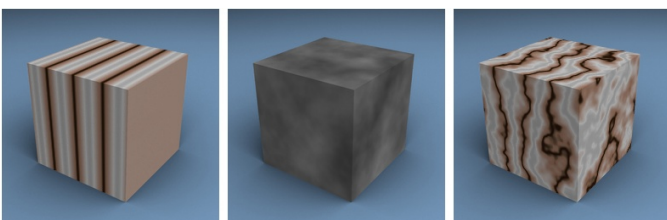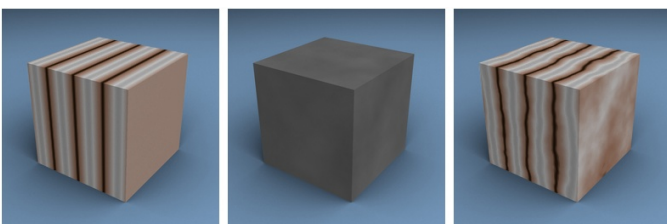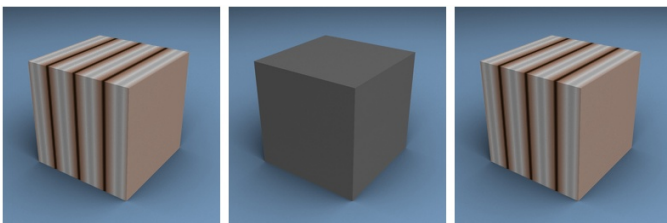


Increasing K

↓

15

Environment mapping



In **environment mapping** (also known as **reflection mapping**), a texture is used to model an object's environment:

- ◆ Rays are bounced off objects into environment
- ◆ Color of the environment used to determine color of the illumination
- ◆ Environment mapping works well when there is just a single object – or in conjunction with ray tracing

This can be readily implemented (without interreflection) using a fragment shader, where the texture is stored in a “cube map” instead of a sphere.

With a ray tracer, the concept is easily extended to handle refraction as well as reflection (and interreflection).

16

Summary

What to take home from this lecture:

1. The meaning of the boldfaced terms.
2. Familiarity with the various kinds of texture mapping, including their strengths and limitations.