

LEC 04

CSE 123

LinkedIntList

Questions during Class?
Raise hand or send here

sli.do #cse123



BEFORE WE START

Talk to your neighbors:

What is your favorite way to eat a potato? 🥔

Respond on sli.do!

Instructor: Trien Vuong

TAs:	Cora	Nhan
	Jonah	Nichole
	Maitreyi	Shiven

Music: [CSE 123 26su Lecture Tunes](#)

Lecture Outline: Announcements

- **Announcements** 
- Revisiting the PCM (Modifying Links)
- `LinkedIntList`


Announcements

- Resubmission Cycle 0 open, closes today
- Programming Assignment 1 released
 - Due Wednesday at 11:59 PM on July 22nd.

Lecture Outline: Revisiting the PCM (Modifying Links)

- Announcements
- Revisiting the PCM (Modifying Links) ◀
- LinkedList

Revisiting insertAfterLast

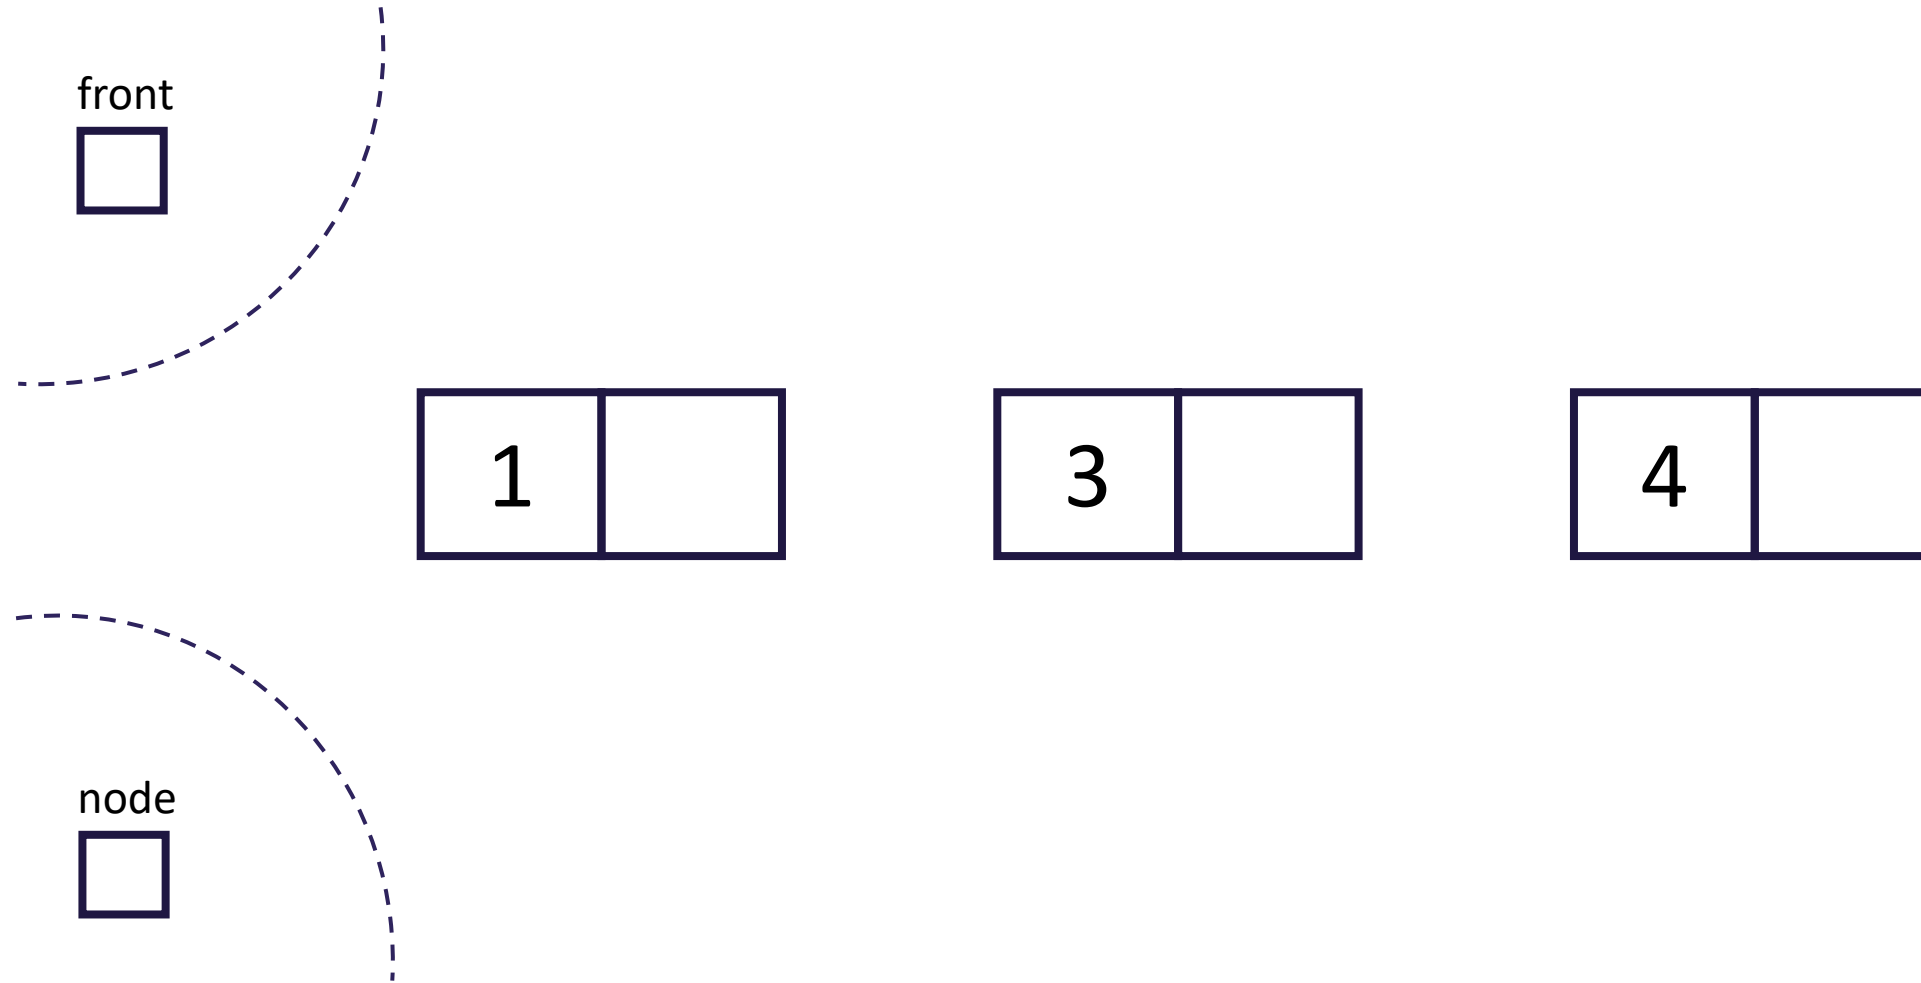

Lecture Outline: LinkedList

- Announcements
- Revisiting the PCM (Modifying Links)
- **LinkedList** ◀

Reminder: Implementing Data Structures


- No different from designing any other class!
 - Specified behavior (Recall the `IntList` interface):

Method	Description
<code>add(int value)</code>	Adds the given value to the end of the list
<code>add(int index, int value)</code>	Adds the given value at the given index
<code>remove(int value)</code>	Removes the given value if it exists
<code>remove(int index)</code>	Removes the value at the given index
<code>get(int index)</code>	Returns the value at the given index
<code>set(int index, int value)</code>	Updates the value at the given index to the one given
<code>size()</code>	Returns the number of elements in the list

- Choose appropriate fields based on behavior
- Just requires some thinking outside the box

LinkedList (1)

- Goal: leverage non-contiguous memory usage
 - How? `LinkedNodes`!
- What field(s) do we need to keep track of?
 - `ListNode front;` `// First node in the chain`

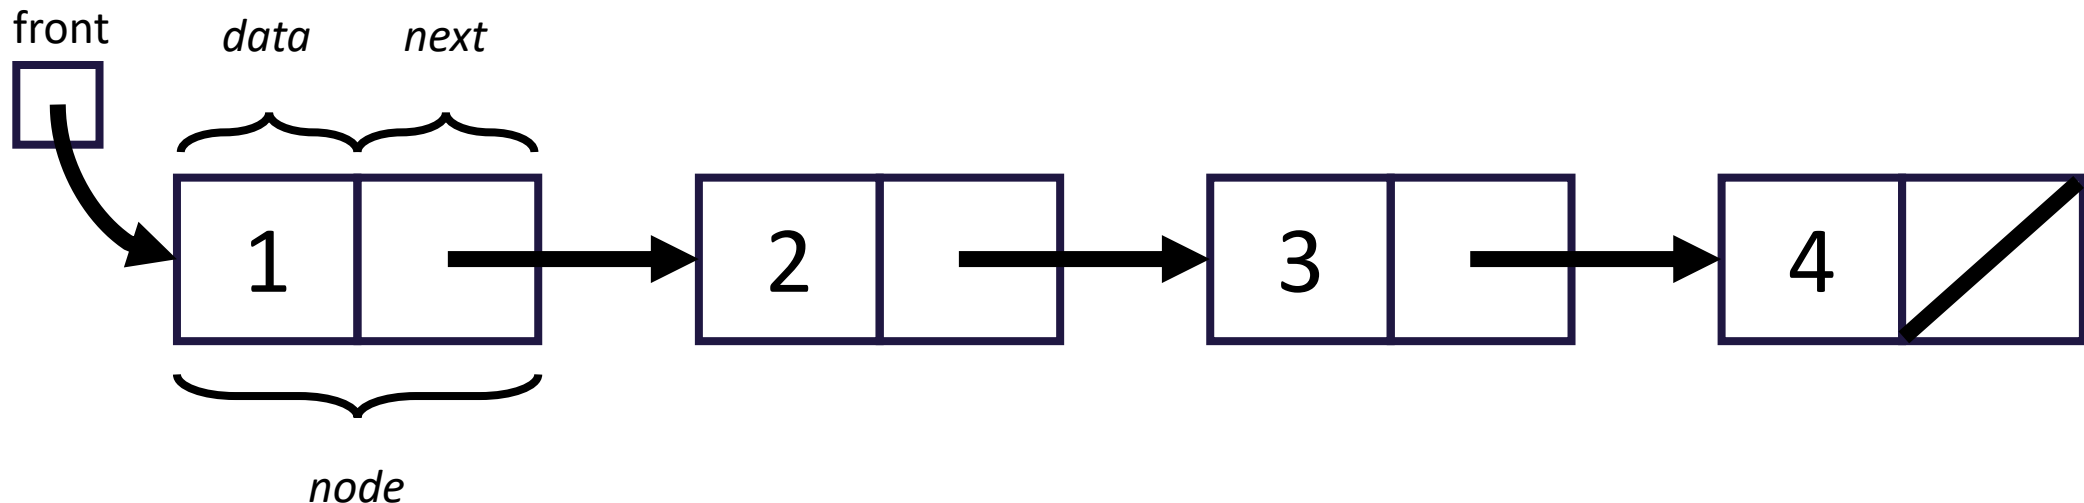

LinkedList (2)

- Now that we have a `LinkedList` class, will a client ever need to interact with a `ListNode`?
 - No! Not something they should have to worry about
- How can we abstract `ListNode`s away from them?
 - Leaving them in a public file is pretty obvious...
- We can make `ListNode` a private inner class inside `LinkedList`!
 - We can still access it (just like private fields)
 - Clients don't need to worry about its existence!

Common Cases to Consider for LinkedListNodes

- Front of list
- Middle (general)
- Empty list
- End of list

Reminder: Iterating over ListNodes

- General pattern iteration code will follow:

```
ListNode curr = front;
while (curr != null) {
    // Do something


    curr = curr.next;
}
```

Why do we need a ListNode curr?

Why curr? printList(front) (1)

```
public static void main(String[] args) {  
    ListNode front = new ListNode(1, new ListNode(2, new ListNode(3)));  
}
```


```
public static void printList(ListNode front) {  
    while (front != null) {  
        System.out.print(front.data + " ");  
        front = front.next;  
    }  
    System.out.println();  
}
```

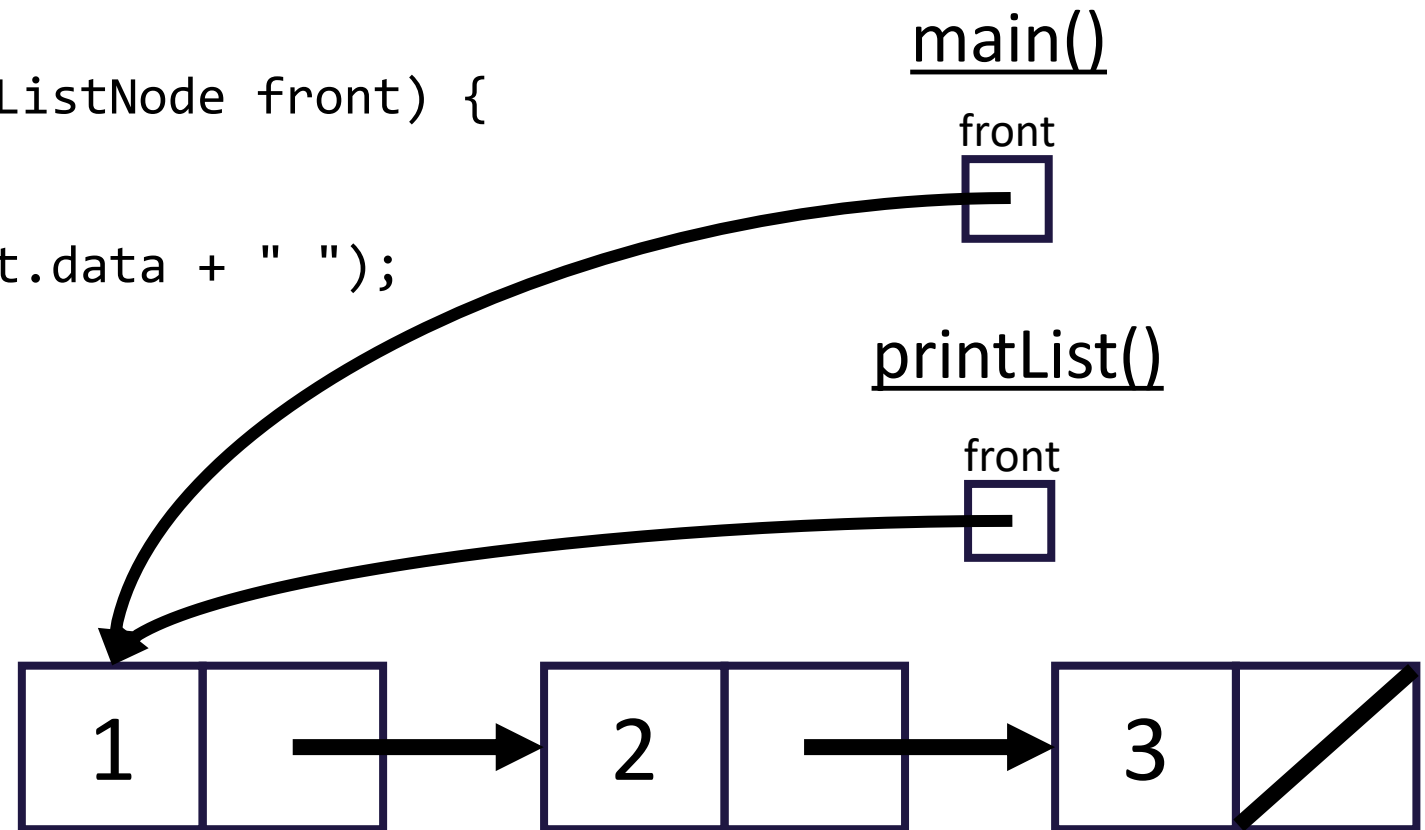

Why curr? printList(front) (2)

```
public static void main(String[] args) {  
    ListNode front = new ListNode(1, new ListNode(2, new ListNode(3)));  
}
```


```
public static void printList(ListNode front) {  
    while (front != null) {  
        System.out.print(front.data + " ");  
        front = front.next;  
    }  
    System.out.println();  
}
```

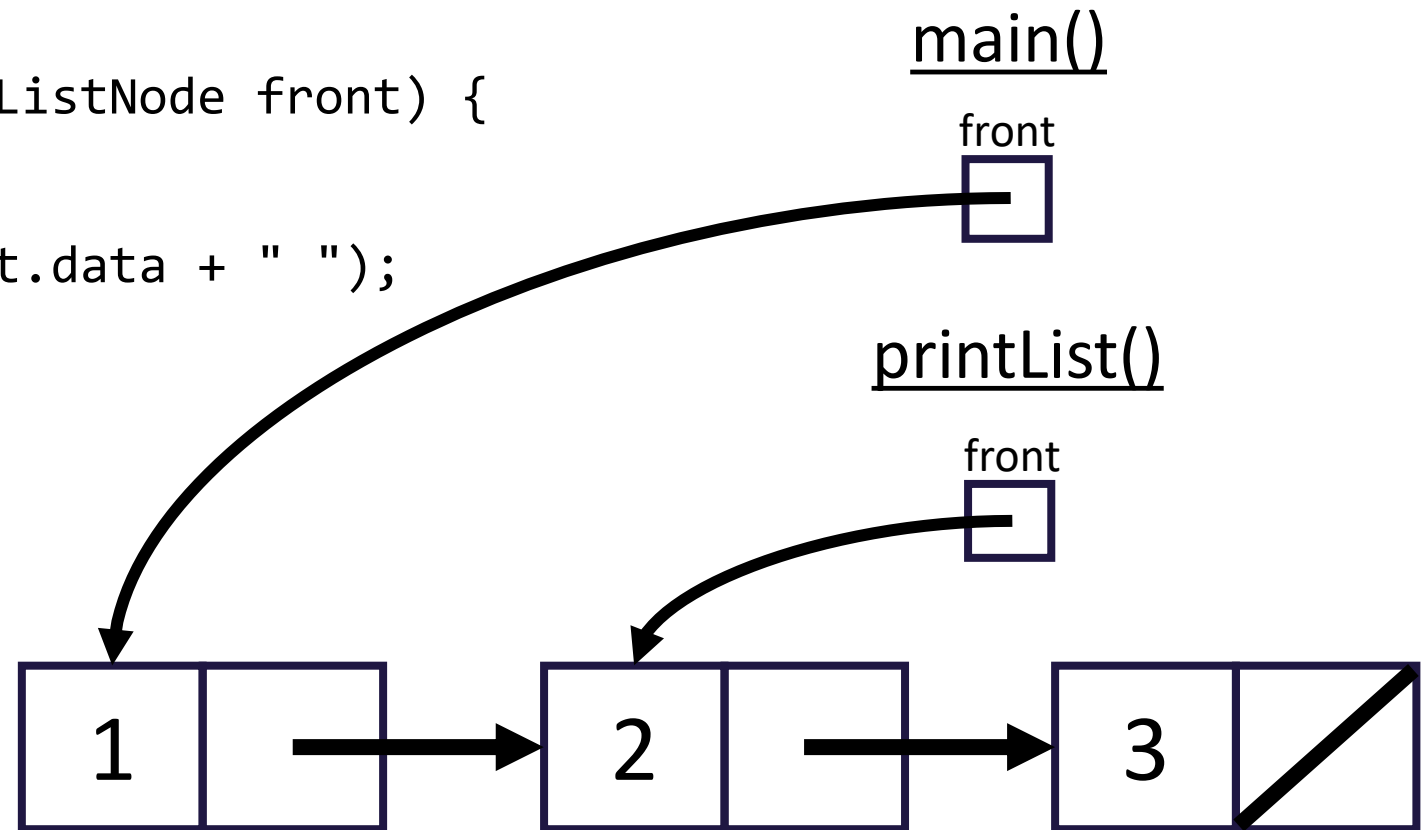

Why curr? printList(front) (3)

```
public static void main(String[] args) {  
    ListNode front = new ListNode(1, new ListNode(2, new ListNode(3)));  
}
```


```
public static void printList(ListNode front) {  
    while (front != null) {  
        System.out.print(front.data + " ");  
        front = front.next;  
    }  
    System.out.println();  
}
```

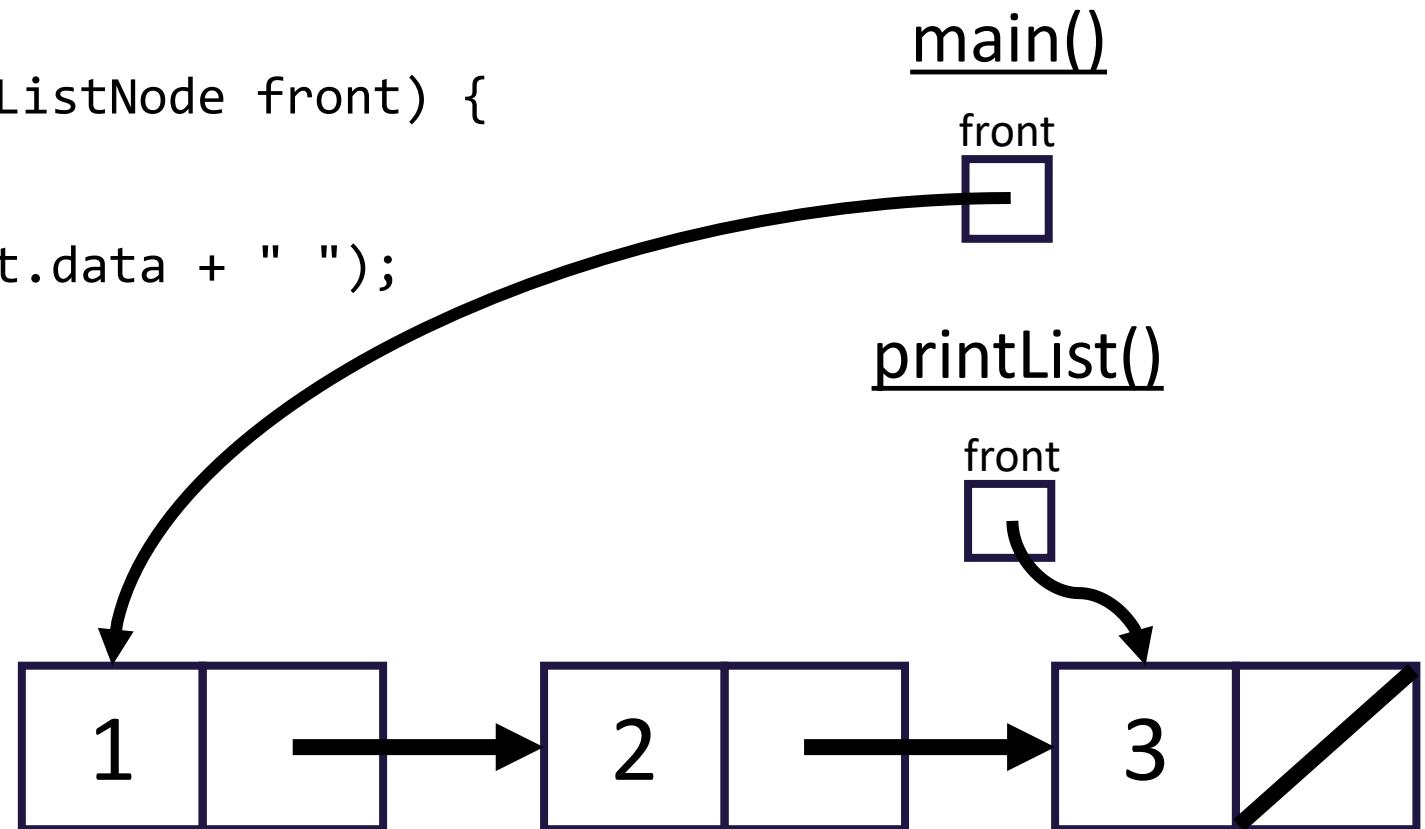

Why curr? printList(front) (4)


```
public static void main(String[] args) {  
    ListNode front = new ListNode(1, new ListNode(2, new ListNode(3)));  
}
```

```
public static void printList(ListNode front) {  
    while (front != null) {  
        System.out.print(front.data + " ");  
        front = front.next;  
    }  
    System.out.println();  
}
```

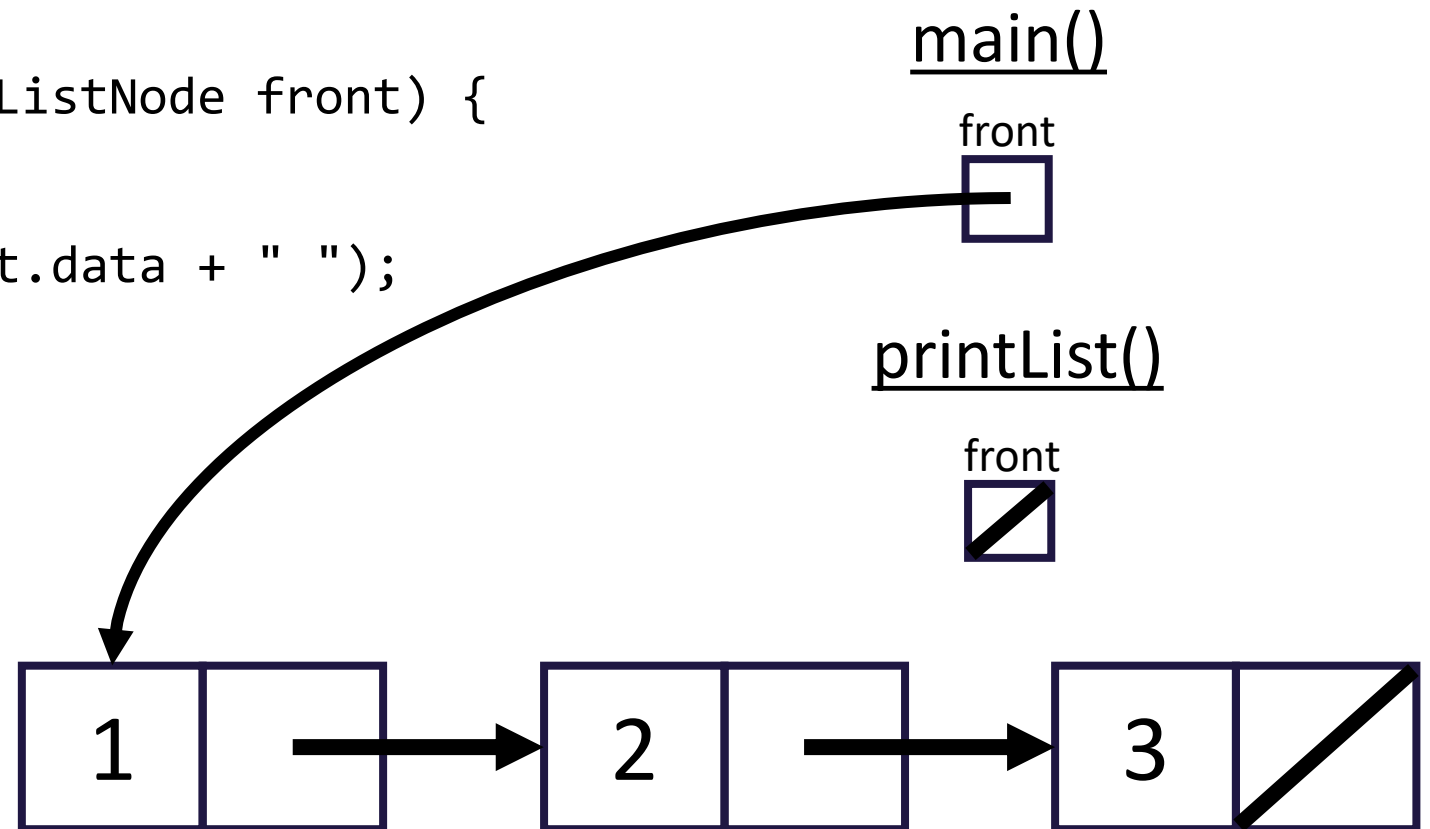


Why curr? **LinkedList** (1)

```
public class LinkedList {  
    private ListNode front;  
  
    public void printList() {  
        while (front != null) {  
            System.out.print(front.data + " ");  
            front = front.next;  
        }  
    }  
}
```

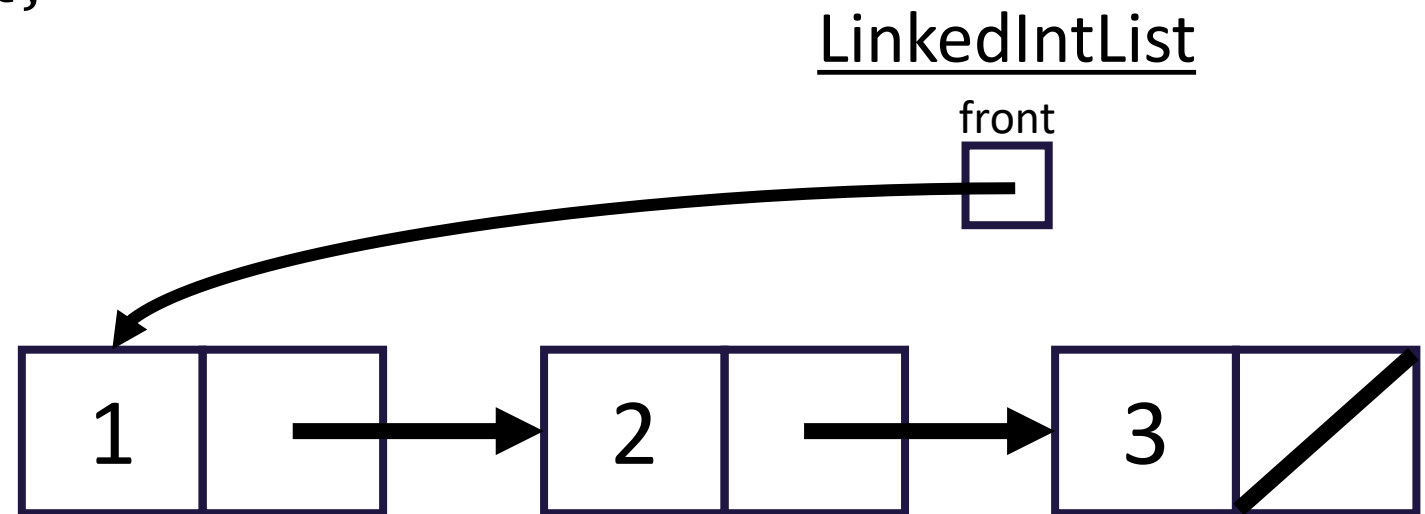


Why curr? **LinkedList** (2)

```
public class LinkedList {  
    private ListNode front;  
  
    public void printList() {  
        while (front != null) {  
            System.out.print(front.data + " ");  
            front = front.next;  
        }  
    }  
}
```

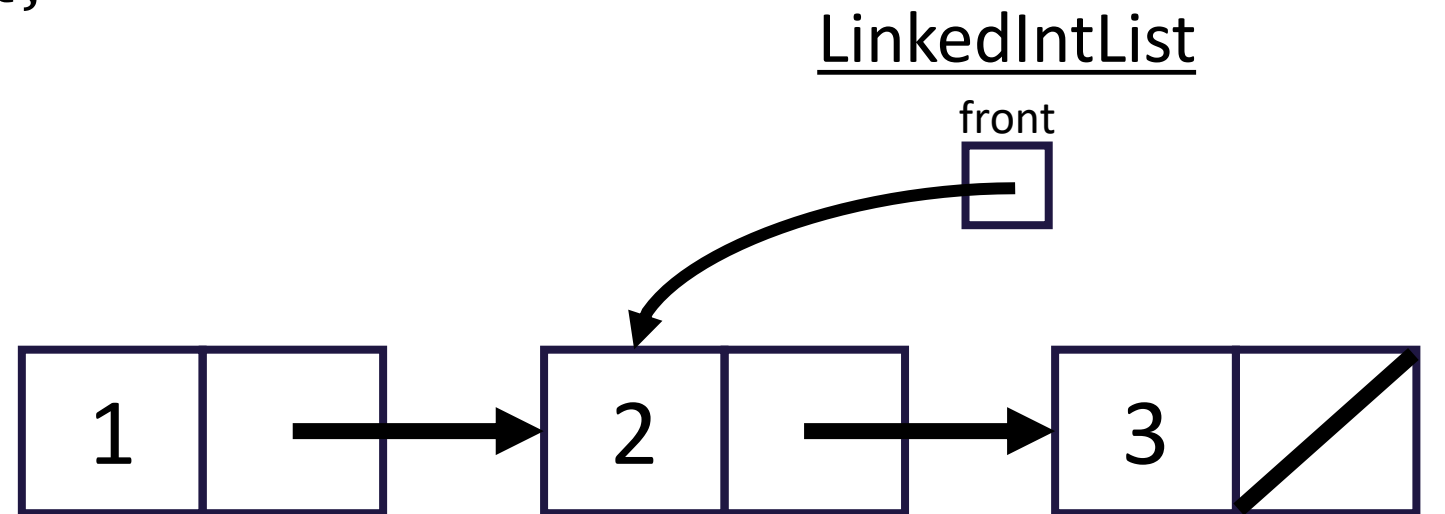

Why curr? **LinkedList** (3)

```
public class LinkedList {  
    private ListNode front;  
  
    public void printList() {  
        while (front != null) {  
            System.out.print(front.data + " ");  
            front = front.next;  
        }  
    }  
}
```

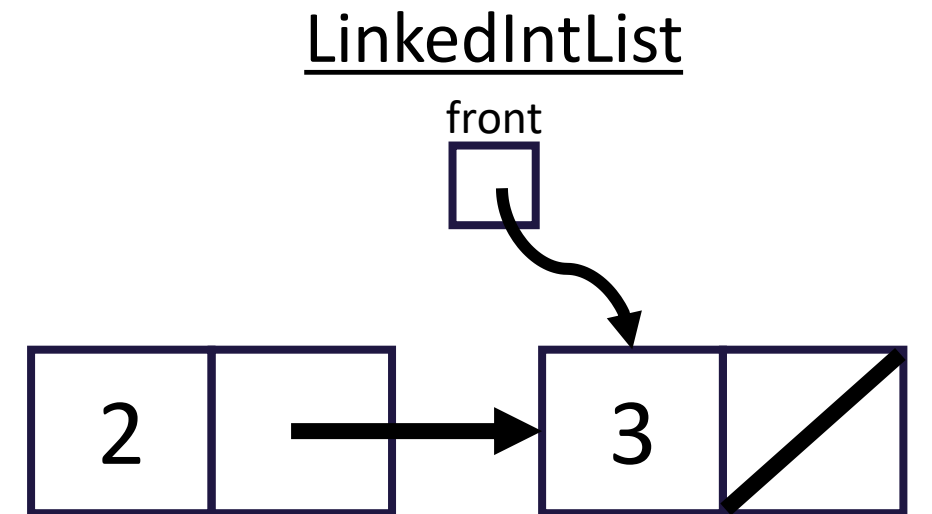


Why curr? **LinkedList** (4)

```
public class LinkedList {  
    private ListNode front;  
  
    public void printList() {  
        while (front != null) {  
            System.out.print(front.data + " ");  
            front = front.next;  
        }  
    }  
}
```


LinkedList




Modifying front now modifies the list!

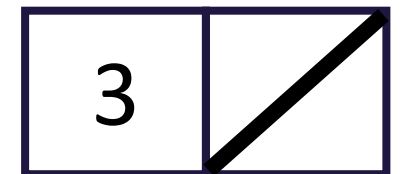

Considering **LinkedList** printList()

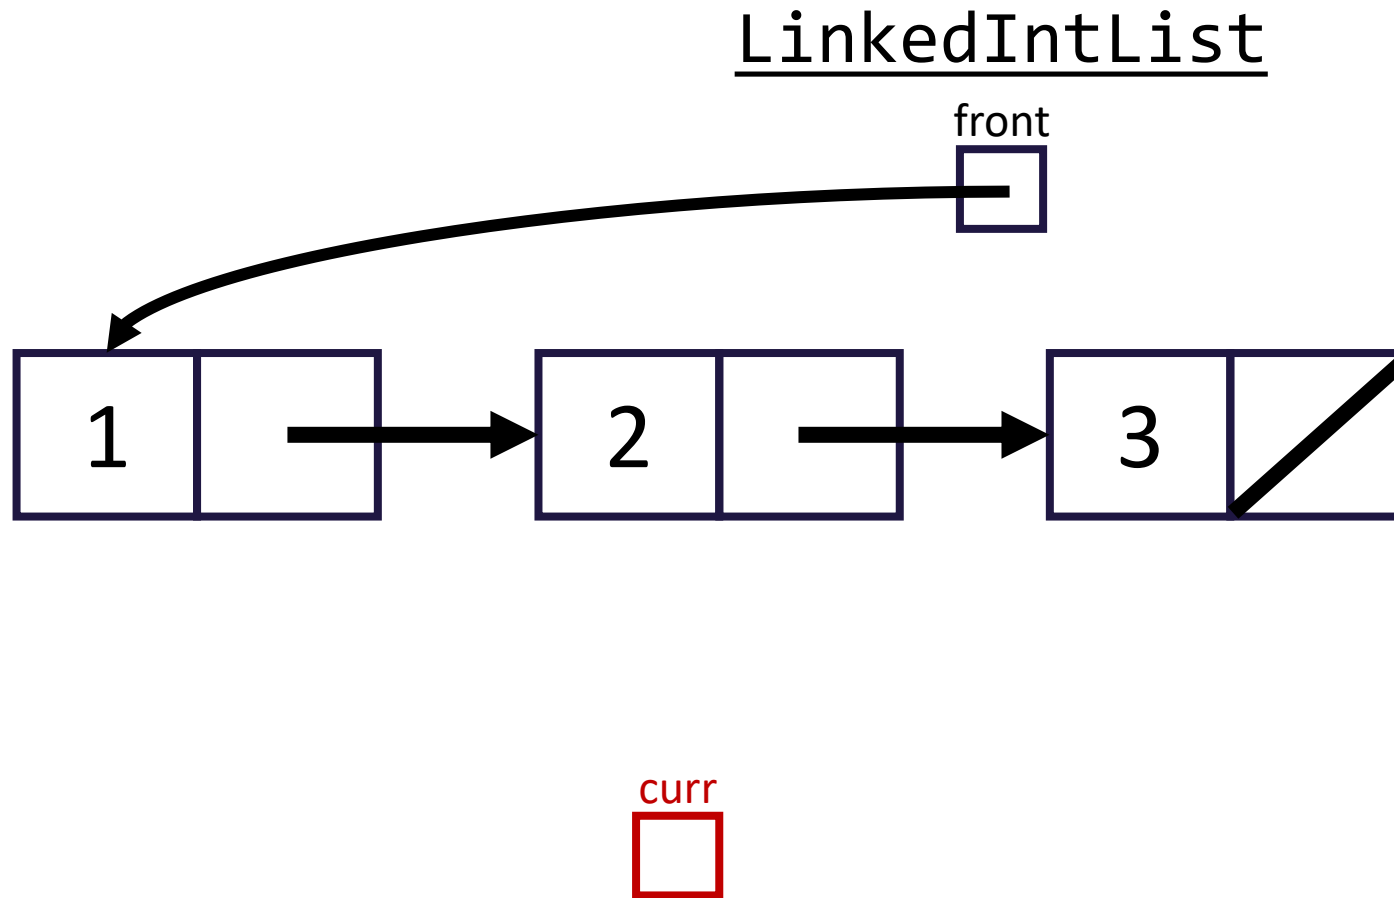


remove(value) v1

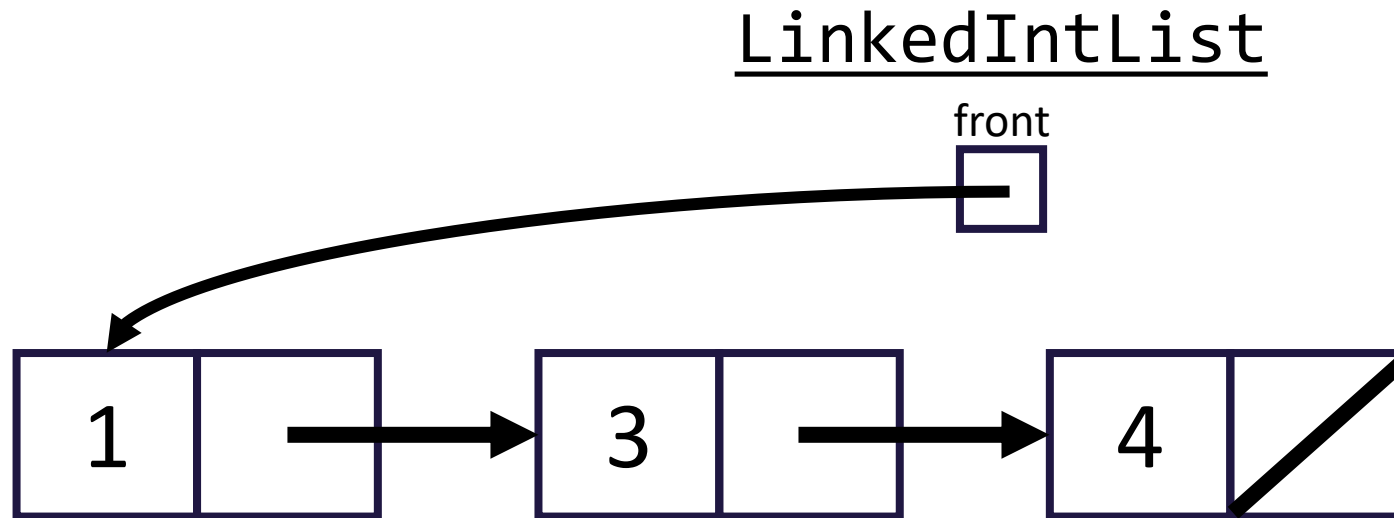

curr

```
if (curr.data == value) {  
    // remove curr from the list...  
}
```

remove(value) v2

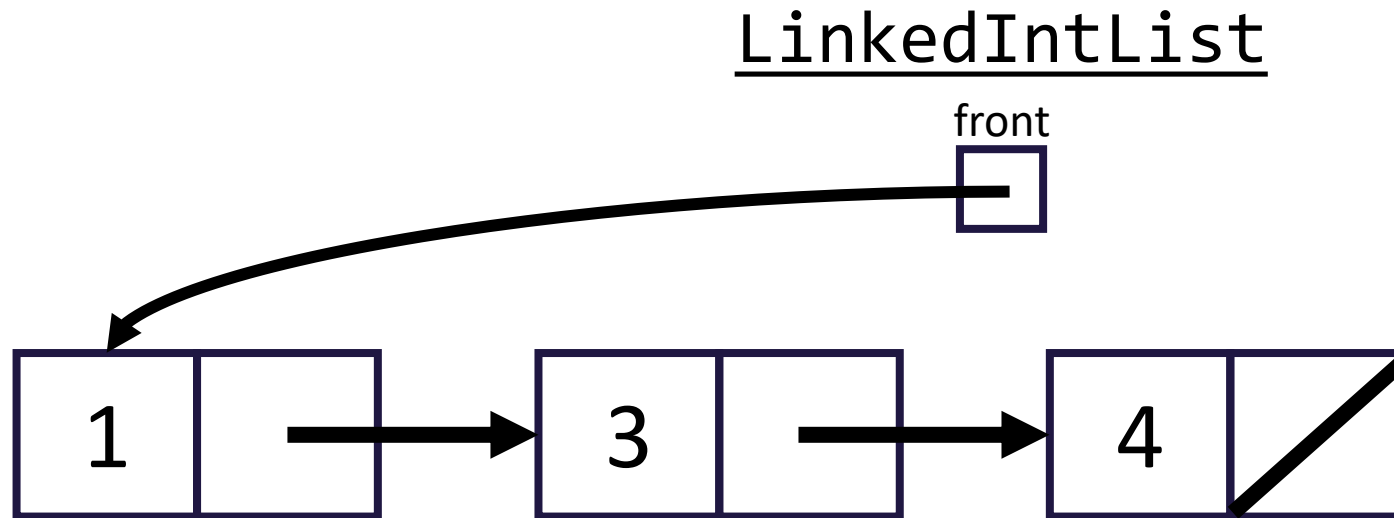

curr

```
if (curr.next.data == value) {  
    // remove curr from the list...  
}
```

Modifying LinkedLists

- Remember: using a curr variable to iterate over nodes
- Does changing curr actually update our chain?
 - What will? Changing curr.next, changing front
 - Need to **stop one early** to make changes
- Often a number of (edge) cases to watch out for:
 - M(iddle) – Modifying node in the middle of the list (general)
 - F(ront) – Modifying the first node
 - E(mpty) – What if the list is empty?
 - E(nd) – Rare, do we need to do something with the end of the list?