

CSE 143

Recursion

Chapter 2

Advanced Reading: Chapter 5

07/29/01 I-1

Insist without Iterating

```
char InsistOnYorN (void) {  
    char answer;  
    cout << "Please enter y or n: " << endl;  
    cin >> answer;  
    switch (answer) {  
        case 'y': return 'y';  
        case 'n': return 'n';  
        default:  
            return InsistOnYorN();  
    }  
}
```

07/29/01 I-2

Recursion

- A **recursive** definition is one which is defined in terms of itself
- Examples:
 - Compound interest: "The **value after 10 years** is equal to the interest rate times the **value after 9 years**."
 - A phrase is a "palindrome" if the 1st and last letters are the same, and what's inside is itself a palindrome (or is empty).

07/29/01 I-3

Computer Science Examples

- Recursive procedure: a procedure that invokes itself
- Recursive data structures: a data structure may contain a pointer to an instance of the same type

```
struct Node {  
    int data;  
    Node *next;  
};
```
- Recursive (inductive) definitions: if A and B are arithmetic expressions, then (A) + (B) is a valid expression

07/29/01 I-4

Factorial

$n!$ ("n factorial") can be defined in two ways:

- Non-recursive definition

$$n! = n * (n-1) * (n-2) * \dots * 2 * 1$$

- Recursive definition

$$n! = \begin{cases} 1 & , \text{ if } n = 1 \\ n * (n-1)! & , \text{ if } n > 1 \end{cases}$$

0! is usually defined to be 1

Undefined for negative numbers

07/29/01 I-5

Factorial (2)

- How do we write a function that reflects the recursive definition?

```
int factorial(int n) {  
    assert(n >= 1);  
    if ( n == 1 )  
        return 1;  
    else  
        return n * factorial(n-1);  
}
```

- The factorial function invokes itself.
- How can this work?

07/29/01 I-6

What Makes Recursion Work?

- Review: local variables and formal params are
 - allocated when { } block is entered,
 - deleted when block is exited.
- Here's how:
 - Whenever a function is called (or { } block is entered), a new "activation record" is created, containing:
 - a separate copy of all local variables and parameters
 - control info, such as where to return to
 - Activation record is alive until the function returns. Then it is destroyed.
 - This applies *whether or not* function is recursive!

07/29/01 1-7

Simplified Model

- Every time you call a function, you get a fresh copy of it.**
 - If you call recursively, you end up with more than one copy of the function active
- When you exit a function, only that copy of it goes away.**
- In reality...
 - there's only one copy of the code (instructions), but separate copies of the data (variables and parameters)


07/29/01 1-8

Tracing the Process

- To trace function calls
 - draw a box each time a function is called.
 - draw an arrow from caller to called function
 - label data (local vars, params) inside the box
 - indicate the returned value (if any)
 - cross out the box after return and don't reuse it!
- Question: how is this different from a "static call graph"?
- Note that *no* special handling is needed just because a function happens to be recursive!

07/29/01 1-9

Trace Example

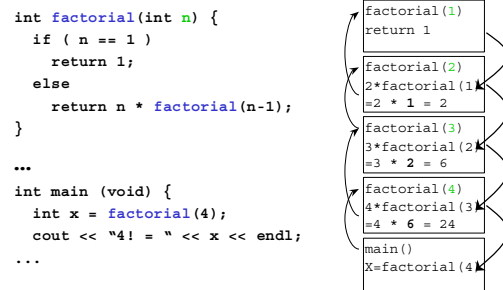

07/29/01 1-10

What is Recursion?

- A programming technique
 - a function calling itself
 - An approach to problem-solving
 - Look for smaller problems similar to the larger problem
 - A way of thinking about algorithms
 - Turns out to lead to good mathematical analyses
 - The natural algorithmic technique when recursive data structures are involved
- Recursion takes practice*
- Eventually it becomes a natural habit of thought

07/29/01 1-11

What About Efficiency??

- Is recursion faster/slower/smarter/more powerful etc. than iteration? We'll talk about that, too -- later
- Learning *how* to drive a car, vs learning *when and where* to drive a car.
 - Different kinds of knowledge
 - The first especially requires focused practice

07/29/01 1-12

Infinite Recursion

- Mathematically:
 - $n! = n * (n-1)! = (n-1)! * n$
 - Why not program it in that order?
- ```
int BadFactorial(n) {
 int x = BadFactorial(n-1);
 if (n == 1)
 return 1;
 else
 return n * x;
}
```
- What is the value of `BadFactorial(2)`?
  - The rule: Must always have some way to make recursion stop, otherwise it runs forever:

07/29/01 I-13

## Using Recursion Properly

- For correct recursion (recursion that does something useful and eventually stops), need two parts:
  - One or more **base cases** that are not recursive  
`if ( n == 1 ) return 1; // no recursion in this case`
  - One or more **recursive cases** that operate on *smaller* problems that get *closer* to a base case  
`return n * factorial(n-1);`  
`//factorial(n-1) is a smaller problem than factorial (n)`
- The base case(s) should **always** be checked before the recursive calls

07/29/01 I-14

## Linear Search

- Problem statement: Given an array A of N ints, search for an element with value x
- First, an iterative solution:

```
// Return index of x if found, or -1 if not
int Find (int A[], int N, int x)
{
 for (int i = 0; i < N; i++)
 if (A[i] == x)
 return i;
 return -1;
}
```
- How efficient is this?
  - Might find x on first step, or you might have to check all N values
  - On average, it takes about N/2 times through the loop

07/29/01 I-15

## Binary Search

- If array is *sorted*, we can search faster
  - Start search in middle of array  
`if x is right there in the middle, you're done`
  - If x is less than middle element, need to search only in lower half
  - If x is greater than middle element, need to search only in upper half
  - continue the search within the half chosen
- Why is this faster than linear search?
  - At each step, linear search throws out *one* element
  - Binary search throws out *half* of remaining elements
- Why is recursion natural here?

07/29/01 I-16

## Example

Find 26 in the following sorted array:

```
1 3 4 7 9 11 15 19 22 24 26 31 35 50 61
 ↑
 22 24 26 31 35 50 61
 ↑
 22 24 26
 ↑
 26
 ↑
```

07/29/01 I-17

## Binary Search (Recursive)

```
int find(int A[], int size, int x) {
 return findInRange(A, x, 0, size-1);
}

int findInRange(int A[], int x, int lo, int hi) {
 if (lo > hi) return -1;
 int mid = (lo+hi) / 2;
 if (x == A[mid])
 return mid;
 else if (x < A[mid])
 return findInRange(A, x, lo, mid-1);
 else
 return findInRange(A, x, mid+1, hi);
}
```

07/29/01 I-18

## Kick-off and Helper Functions

- Previous example illustrates a common pattern:
  - Top-level "kick-off" function
    - Not itself recursive
    - Starts the recursion going
    - Returns the ultimate answer
  - Helper function
    - Contains the actual recursion
    - May require additional parameters to keep track of the recursion
- Client programs only need call the kick-off function

07/29/01 I-19

## Recursion with Array Params

```
double sum (double iArray [], int from, int to) {
 //find the sum of all elements in the array between index "from" and index "to"
 if (from > to)
 return 0.0;
 return iArray[from] + sum (iArray, from+1, to);
}
//Client code:
double CashValues[200];
...
double total = sum (CashValues, 0, 199);
• Implemented without kick-off/helper structure
• but might benefit from having it
```

07/29/01 I-20

## Recursion vs. Iteration

- When to use recursion?
  - Processing recursive data structures
  - "Divide & Conquer" algorithms:
    1. Divide problem into subproblems
    2. Solve each subproblem recursively
    3. Combine subproblem solutions
- When to use iteration instead?
  - Nonrecursive data structures
  - Problems without obvious recursive structure
  - Problems with obvious iterative solution
  - Functions with a large "footprint"
    - especially when many iterations are needed

07/29/01 I-21

## In Theory...

- Any iteration can be rewritten using recursion, and vice-versa (at least in theory)
  - but the rewrite is not always simple!
- Iteration is generally more efficient
  - somewhat faster
  - takes less memory
- A compromise:
  - If the problem is naturally recursive, design the algorithm recursively first
  - Later convert to iteration if needed for efficiency
  - General principle: "Make it right, then make it efficient"

07/29/01 I-22

## So Should You Avoid the R-word?

- If a single recursive call is at the very end of the function:
  - Known as *tail recursion*
  - Easy for a smart compiler to automatically rewrite using iteration (but not commonly done by C/C++ compilers)
- Recursive problems that are not tail recursive are harder to automatically rewrite nonrecursively
  - Usually have to simulate recursion with a stack

07/29/01 I-23

## Summary

- Recursion is something defined in terms of itself
- Activation records make it work
- Elements of recursive functions
  - Base case(s)
  - Recursive case(s)
    - Base case always checked first
- When to use/when to avoid

*As the course unfolds, we'll see more and more cases where recursion is natural to use*

07/29/01 I-24