

CSE 143

Lecture 24

Inheritance and the `Object` class; Polymorphism

read 9.2 - 9.4

slides created by Marty Stepp, Hélène Martin, and Ethan Apter

<http://www.cs.washington.edu/143/>

Recall: Inheritance

- **inheritance**: Forming new classes based on existing ones.
 - **superclass**: Parent class being extended.
 - **subclass**: Child class that inherits behavior from superclass.
 - gets a copy of every field and method from superclass
- **override**: To replace a superclass's method by writing a new version of that method in a subclass.

```
public class Lawyer extends Employee {  
    // overrides getSalary in Employee; a raise!  
    public double getSalary() {  
        return 55000.00;  
    }  
}
```

The super keyword


```
super.method (parameters)  
super (parameters) ;
```

- Subclasses can call overridden methods/constructors with `super`

```
public class Lawyer extends Employee {  
    private boolean passedBarExam;  
  
    public Lawyer(int vacationDays, boolean bar) {  
        super(vacationDays * 2);  
        this.passedBarExam = bar;  
    }  
  
    public double getSalary() {  
        double baseSalary = super.getSalary();  
        return baseSalary + 5000.00;    // $5K raise  
    }  
    ...  
}
```

The class Object

- The class `Object` forms the root of the overall inheritance tree of all Java classes.
 - Every class is implicitly a subclass of `Object`
- The `Object` class defines several methods that become part of every class you write. For example:
 - `public String toString()`
Returns a text representation of the object, usually so that it can be printed.

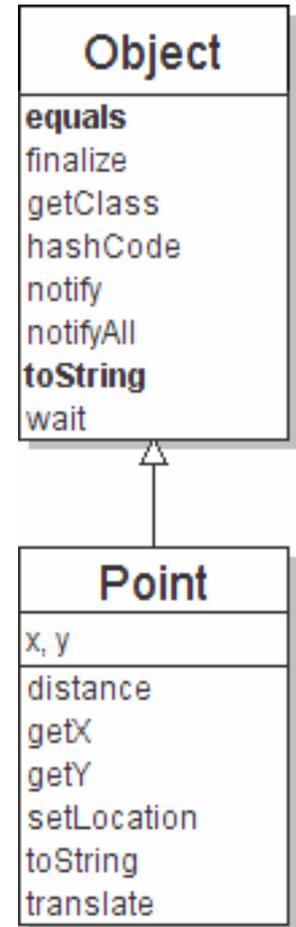

Object methods

method	description
<code>protected Object clone()</code>	creates a copy of the object
<code>public boolean equals(Object o)</code>	returns whether two objects have the same state
<code>protected void finalize()</code>	used for garbage collection
<code>public Class<?> getClass()</code>	info about the object's type
<code>public int hashCode()</code>	a code suitable for putting this object into a hash collection
<code>public String toString()</code>	text representation of object
<code>public void notify()</code> <code>public void notifyAll()</code> <code>public void wait()</code> <code>public void wait(...)</code>	methods related to concurrency and locking (seen later)

– What does this list of methods tell you about Java's design?

Using the Object class

- You can store any object in a variable of type `Object`.

```
Object o1 = new Point(5, -3);  
Object o2 = "hello there";
```

- You can write methods that accept an `Object` parameter.

```
public void checkNotNull(Object o) {  
    if (o != null) {  
        throw new IllegalArgumentException();  
    }  
}
```

- You can make arrays or collections of `Objects`.

```
Object[] a = new Object[5];  
a[0] = "hello";  
a[1] = new Random();  
List<Object> list = new ArrayList<Object>();
```


Recall: comparing objects

- The `==` operator does not work well with objects.
 - It compares references, not objects' state.
 - It produces `true` only when you compare an object to itself.

```
Point p1 = new Point(5, 3);  
Point p2 = new Point(5, 3);  
Point p3 = p2;
```

```
// p1 == p2 is false;  
// p1 == p3 is false;  
// p2 == p3 is true
```

```
// p1.equals(p2)?  
// p2.equals(p3)?
```

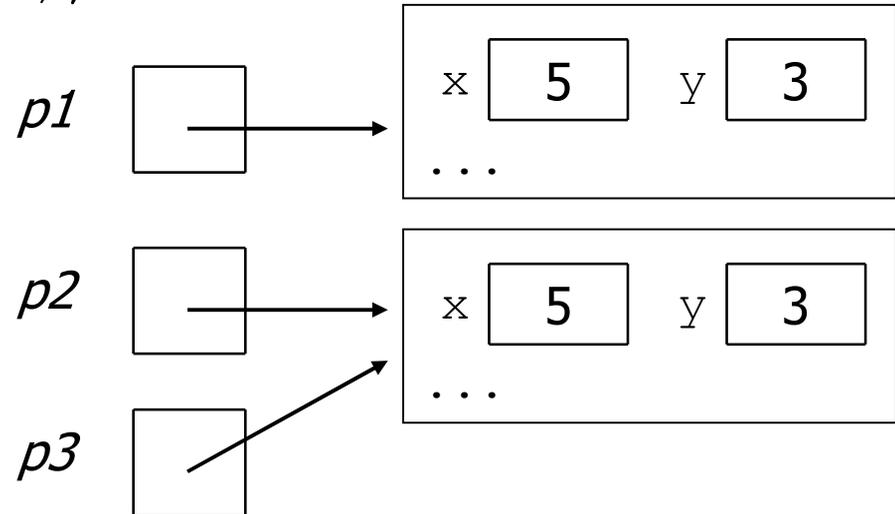

Default equals method

- The `Object` class's `equals` implementation is very simple:

```
public class Object {  
    ...  
    public boolean equals(Object o) {  
        return this == o;  
    }  
}
```

- However:
 - When we have used `equals` with various objects, it didn't behave like `==`. Why not? `if (str1.equals(str2)) { ...`
 - The [Java API documentation for equals](#) is elaborate. Why?

Implementing equals

```
public boolean equals(Object name) {  
    statement(s) that return a boolean value ;  
}
```

- The parameter to `equals` must be of type `Object`.
- Having an `Object` parameter means *any* object can be passed.
 - If we don't know what type it is, how can we compare it?

Casting references

```
Object o1 = new Point(5, -3);  
Object o2 = "hello there";
```

```
((Point) o1).translate(6, 2);           // ok  
int len = ((String) o2).length();     // ok  
Point p = (Point) o1;  
int x = p.getX();                     // ok
```

- Casting references is different than casting primitives.
 - Really casting an `Object` **reference** into a `Point` reference.
 - Doesn't actually change the object that is referred to.
 - Tells the compiler to *assume* that `o1` refers to a `Point` object.

The instanceof keyword

```
if (variable instanceof type) {  
    statement(s);  
}
```

- Asks if a variable refers to an object of a given type.
 - Used as a boolean test.

```
String s = "hello";  
Point p = new Point();
```

expression	result
s instanceof Point	false
s instanceof String	true
p instanceof Point	true
p instanceof String	false
p instanceof Object	true
s instanceof Object	true
null instanceof String	false
null instanceof Object	false

equals method for Points

```
// Returns whether o refers to a Point object with
// the same (x, y) coordinates as this Point.
public boolean equals(Object o) {
    if (o instanceof Point) {
        // o is a Point; cast and compare it
        Point other = (Point) o;
        return x == other.x && y == other.y;
    } else {
        // o is not a Point; cannot be equal
        return false;
    }
}
```

More about equals

- Equality is expected to be reflexive, symmetric, and transitive:

`a.equals(a)` is true for every object `a`

`a.equals(b) ↔ b.equals(a)`

`(a.equals(b) && b.equals(c)) ↔ a.equals(c)`

- No non-null object is equal to `null`:

`a.equals(null)` is false for every object `a`

- Two sets are equal if they contain the same elements:

```
Set<String> set1 = new HashSet<String>();
Set<String> set2 = new TreeSet<String>();
for (String s : "hi how are you".split(" ")) {
    set1.add(s);    set2.add(s);
}
System.out.println(set1.equals(set2));    // true
```

The hashCode method

```
public int hashCode()
```

Returns an integer hash code for this object, indicating its preferred to place it in a hash table / hash set.

- Allows us to store non-`int` values in a hash set/map:

```
public static int hashFunction(Object o) {  
    return Math.abs(o.hashCode()) % elements.length;  
}
```

- How is `hashCode` implemented?
 - Depends on the type of object and its state.
 - Example: a `String`'s `hashCode` adds the ASCII values of its letters.
 - You can write your own `hashCode` methods in classes you write.
 - All classes come with a default version based on memory address.

Polymorphism

Polymorphism

- **polymorphism**: Ability for the same code to be used with different types of objects and behave differently with each.
- A variable or parameter of type T can refer to any subclass of T .

```
Employee ed = new Lawyer();  
Object otto = new Secretary();
```

- When a method is called on `ed`, it behaves as a `Lawyer`.
- You can call any `Employee` methods on `ed`.
You can call any `Object` methods on `otto`.
 - You can *not* call any `Lawyer`-only methods on `ed` (e.g. `sue`).
You can *not* call any `Employee` methods on `otto` (e.g. `getHours`).

Polymorphism examples

- You can use the object's extra functionality by casting.

```
Employee ed = new Lawyer();  
ed.getVacationDays();           // ok  
ed.sue();                       // compiler error  
((Lawyer) ed).sue();           // ok
```

- You can't cast an object into something that it is not.

```
Object otto = new Secretary();  
System.out.println(otto.toString()); // ok  
otto.getVacationDays();             // compiler error  
((Employee) otto).getVacationDays(); // ok  
((Lawyer) otto).sue();             // runtime error
```

"Polymorphism mystery"

- Figure out the output from all methods of these classes:

```
public class Snow {  
    public void method2() {  
        System.out.println("Snow 2");  
    }  
    public void method3() {  
        System.out.println("Snow 3");  
    }  
}
```

```
public class Rain extends Snow {  
    public void method1() {  
        System.out.println("Rain 1");  
    }  
    public void method2() {  
        System.out.println("Rain 2");  
    }  
}
```


"Polymorphism mystery"

```
public class Sleet extends Snow {
    public void method2() {
        System.out.println("Sleet 2");
        super.method2();
        method3();
    }
    public void method3() {
        System.out.println("Sleet 3");
    }
}
```

```
public class Fog extends Sleet {
    public void method1() {
        System.out.println("Fog 1");
    }
    public void method3() {
        System.out.println("Fog 3");
    }
}
```

Technique 1: diagram

- Diagram the classes from top (superclass) to bottom.

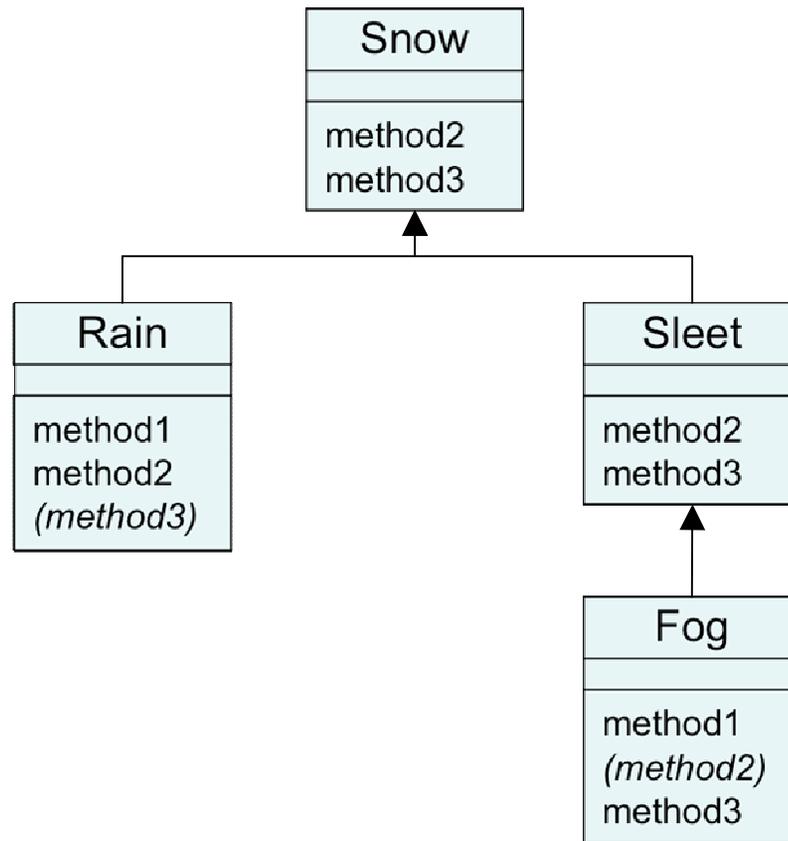

Technique 2: table

method	Snow	Rain	Sleet	Fog
method1		Rain 1		Fog 1
method2	Snow 2	Rain 2	Sleet 2 Snow 2 method3 ()	<i>Sleet 2</i> <i>Snow 2</i> <i>method3 ()</i>
method3	Snow 3	<i>Snow 3</i>	Sleet 3	Fog 3

Italic - inherited behavior

Bold - dynamic method call

Mystery problem, no cast

```
Snow var3 = new Rain();  
var3.method2();           // What's the output?
```

- If the problem does *not* have any casting, then:
 1. Look at the variable's type.
If that type does not have the method: ERROR.
 2. Execute the method, behaving like the object's type.
(The variable type no longer matters in this step.)


Example 1

- What is the output of the following call?

```
Snow var1 = new Sleet();  
var1.method2();
```

- Answer:

```
Sleet 2  
Snow 2  
Sleet 3
```

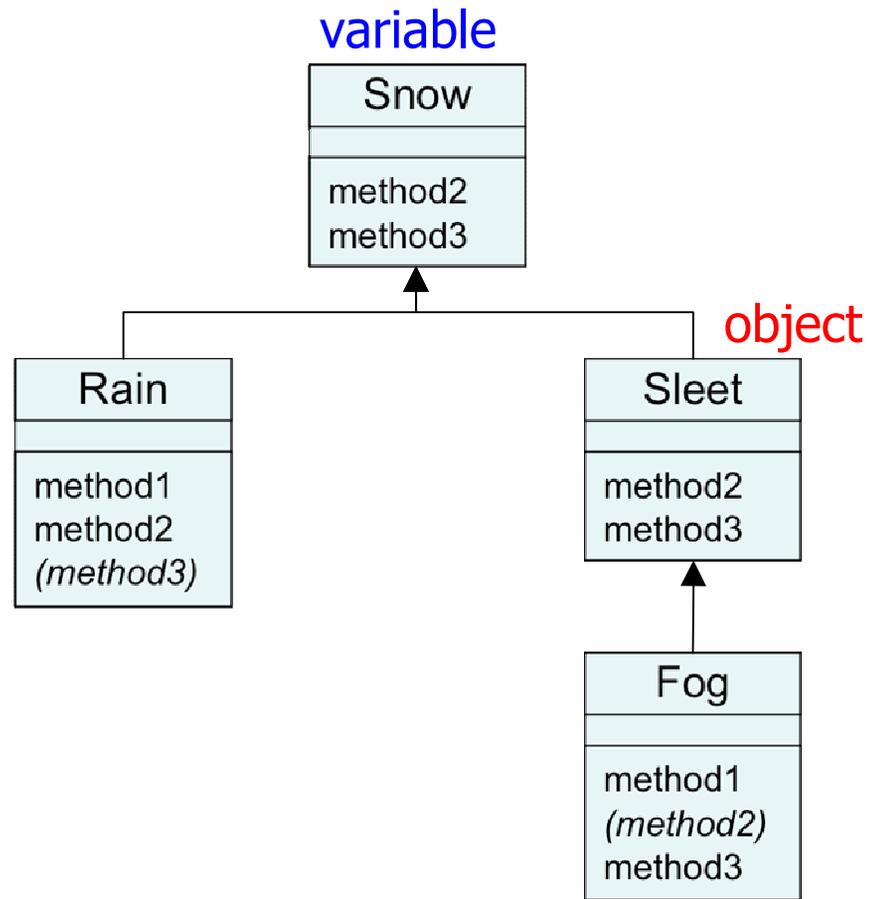


Example 2

- What is the output of the following call?

```
Snow var2 = new Rain();  
var2.method1();
```

- Answer:

ERROR
(because `Snow` does not
have a `method1`)

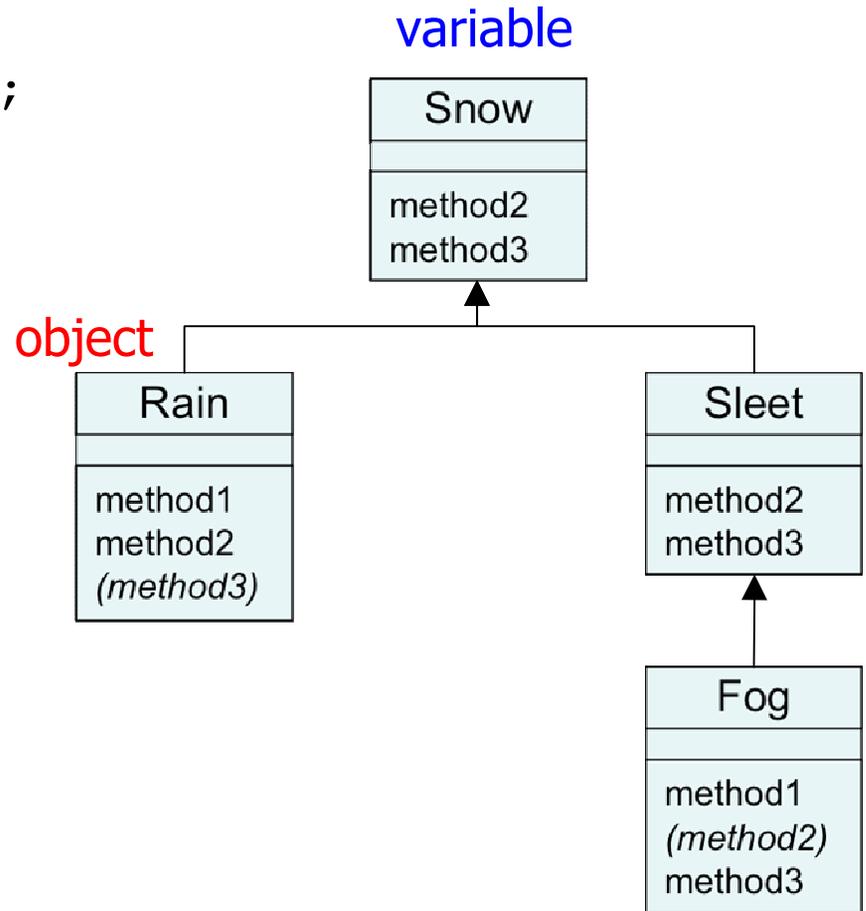

Mystery problem with cast

```
Snow var2 = new Rain();  
((Sleet) var2).method2();    // What's the output?
```

- If the problem *does* have a type cast, then:
 1. Look at the cast type.
If that type does not have the method: ERROR.
 2. Make sure the object's type is the cast type or is a subclass of the cast type. If not: ERROR. (No sideways casts!)
 3. Execute the method, behaving like the object's type.
(The variable / cast types no longer matter in this step.)


Example 3

- What is the output of the following call?

```
Snow var2 = new Rain();  
(Rain) var2.method1();
```

- Answer:

Rain 1

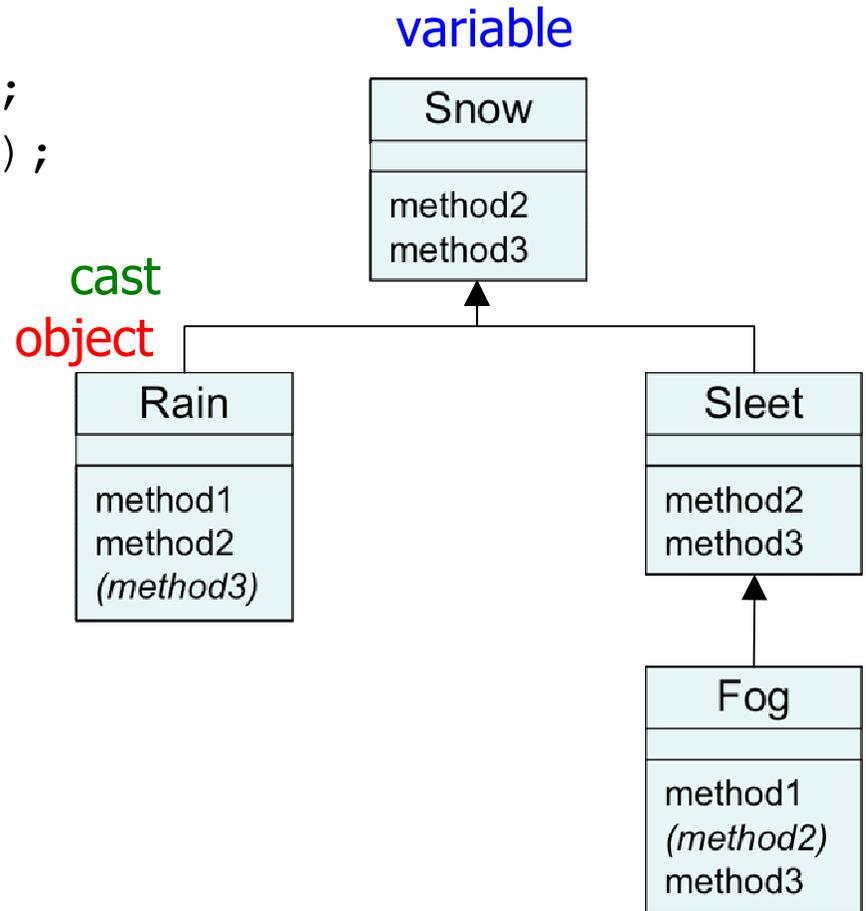

Example 4

- What is the output of the following call?

```
Snow var2 = new Rain();  
(Sleet) var2.method2();
```

- Answer:

ERROR

(because the object's type, `Rain`, cannot be cast into `Sleet`)

