CSE 143 Sample Final Exam #3 Key

1.

Statement	Output
var1.method1();	Raph 1
var1.method2();	error
var1.method3();	error
var2.method1();	Leo 1
var2.method2();	Mike 2/Leo 1/Don 2
var2.method3();	Leo 3/Leo 1
var3.method1();	error
var4.method1();	Leo 1
var4.method2();	Leo 1/Don 2
var4.method3();	error
((Don) var1).method2();	Raph 1/Don 2
((Mike) var2).method2();	Mike 2/Leo 1/Don 2
((Raph) var3).method1();	Raph 1
((Don) var3).method2();	error
((Leo) var4).method3();	Leo 3/Leo 1

2.

```
public class Playa extends Person implements Comparable<Playa> {
    private Set<Person> fiancees;

    public Playa(String name) {
        super(name);
        fiancees = new HashSet<Person>();
    }

    public void engageTo(Person other) {
        super.engageTo(other);
        if (other == null) {
            fiancees.clear();
        } else {
            // if this were a List, I would need to call contains to avoid duplicates
            fiancees.add(other);
        }
    }

    public boolean isSingle() {
        return countFiancees() == 0;
    }

    public int countFiancees() {
        return fiancees.size();
    }

    public int compareTo(Playa other) {
        if (countFiancees() != other.countFiancees()) {
            return countFiancees() - other.countFiancees();
        } else {
            return getName().compareTo(other.getName());
        }
    }
}
```

3.
```java
public void expand(int factor) {
    if (factor <= 0) {
        front = null;
    } else {
        ListNode current = front;
        while (current != null) {
            current.data /= factor;
            for (int i = 1; i < factor; i++) {
                current.next = new ListNode(current.data, current.next);
                current = current.next;
            }
            current = current.next;
        }
    }
}
```
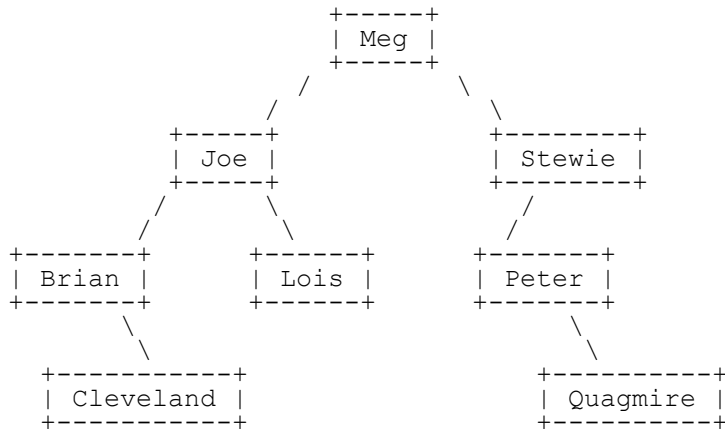
4.

(a) Indexes examined: 6, 2, 4, 3   Value returned: -4

(b) {**9**, **63**, 45, 72, 27, 18, 54, 36}
   {9, **18**, 45, 72, 27, **63**, 54, 36}
   {9, 18, **27**, 72, **45**, 63, 54, 36}

(c) {63,   9,   45,   72,   27,   18,   54,   36}
   {63,   9,   45,   72} {27,   18,   54,   36}   split
   {63,   9} {45,   72} {27,   18} {54,   36}   split
   {63} {9} {45} {72}   {27} {18} {54} {36}   split
   { 9,   63} {45,   72} {18,   27} {36,   54}   merge
   { 9,   45,   63,   72} {18,   27,   36,   54}   merge
   { 9,   18,   27,   36,   45,   54,   63,   72}   merge

5. (a)

```
                          +-----+
                          | Meg |
                          +-----+
                         /       \
                        /         \
                   +-----+       +--------+
                   | Joe |       | Stewie |
                   +-----+       +--------+
                  /       \         /
                 /         \       /
          +-------+     +------+  +-------+
          | Brian |     | Lois |  | Peter |
          +-------+     +------+  +-------+
                 \                      \
                  \                      \
            +-----------+          +----------+
            | Cleveland |          | Quagmire |
            +-----------+          +----------+
```

(b)

Pre-order: Meg, Joe, Brian, Cleveland, Lois, Stewie, Peter, Quagmire

In-order: Brian, Cleveland, Joe, Lois, Meg, Peter, Quagmire, Stewie

Post-order: Cleveland, Brian, Lois, Joe, Quagmire, Peter, Stewie, Meg

6. Two solutions are shown.

```java
public int nodesAtLevels(int min, int max) {
    if (min < 0 || min > max) {
        throw new IllegalArgumentException();
    }
    return nodesAtLevels(overallRoot, 1, min, max);
}

private int nodesAtLevels(IntTreeNode root, int level, int min, int max) {
    if (root == null || level > max) {
        return 0;
    } else if (level < min) {
        return nodesAtLevels(root.left, level + 1, min, max)
                + nodesAtLevels(root.right, level + 1, min, max);
    } else {
        return 1 + nodesAtLevels(root.left, level + 1, min, max)
                + nodesAtLevels(root.right, level + 1, min, max);
    }
}


public int nodesAtLevels(int min, int max) {
    if (min < 0 || min > max) {
        throw new IllegalArgumentException();
    }
    return nodesAtLevels(overallRoot, min, max);
}

private int nodesAtLevels(IntTreeNode root, int min, int max) {
    if (root == null) {
        return 0;
    } else if (min > 0) {
        return nodesAtLevels(root.left, min - 1, max - 1)
                + nodesAtLevels(root.right, min - 1, max - 1);
    } else if (max > 0) {
        return 1 + nodesAtLevels(root.left, min - 1, max - 1)
                + nodesAtLevels(root.right, min - 1, max - 1);
    }
}
```

7.

```java
public void trim(int min, int max) {
    overallRoot = trim(overallRoot, min, max);
}

private IntTreeNode trim(IntTreeNode root, int min, int max) {
    if (root != null) {
        if (root.data < min) {
            root = trim(root.right, min, max);
        } else if (root.data > max) {
            root = trim(root.left, min, max);
        } else {
            root.left  = trim(root.left,  min, max);
            root.right = trim(root.right, min, max);
        }
    }
    return root;
}
```