

# Building Java Programs

Chapter 5  
Lecture 5-1: `while` Loops,  
Fencepost Loops, and Sentinel Loops

**reading: 4.1, 5.1**

self-check: Ch. 4 #2; Ch. 5 # 1-10

exercises: Ch. 4 #2, 4, 5, 8; Ch. 5 # 1-2

# A deceptive problem...

- Write a method `printNumbers` that prints each number from 1 to a given maximum, separated by commas.

For example, the call:

```
printNumbers(5)
```

should print:

```
1, 2, 3, 4, 5
```

# Flawed solutions

- ```
public static void printNumbers(int max) {  
    for (int i = 1; i <= max; i++) {  
        System.out.print(i + ", ");  
    }  
    System.out.println(); // to end the line of output  
}
```


- Output from `printNumbers(5)`: 1, 2, 3, 4, 5,

- ```
public static void printNumbers(int max) {  
    for (int i = 1; i <= max; i++) {  
        System.out.print(", " + i);  
    }  
    System.out.println(); // to end the line of output  
}
```

- Output from `printNumbers(5)`: , 1, 2, 3, 4, 5

# Fence post analogy

- We print  $n$  numbers but need only  $n - 1$  commas.
- Similar to building a fence with wires separated by posts:
  - If we repeatedly place a post + wire, the last post will have an extra dangling wire.
  - A flawed algorithm:  
*for (length of fence) {*  
    *place a post.*  
    *place some wire.*  
*}*

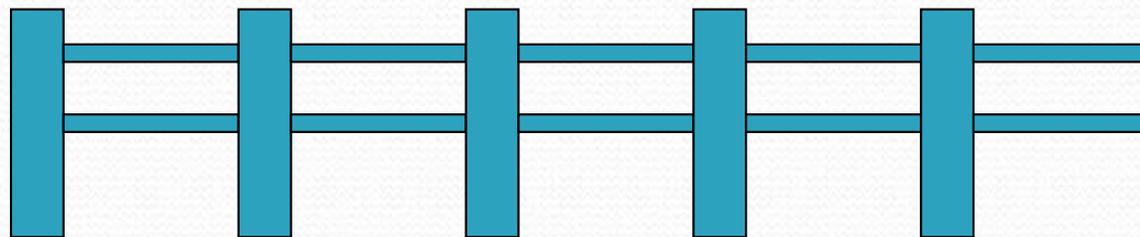

# Fencepost loop

- Add a statement outside the loop to place the initial "post."
  - Also called a *fencepost loop* or a "loop-and-a-half" solution.
- The revised algorithm:


***place a post.***

*for (length of fence - 1) {*

***place some wire.***

***place a post.***

*}*

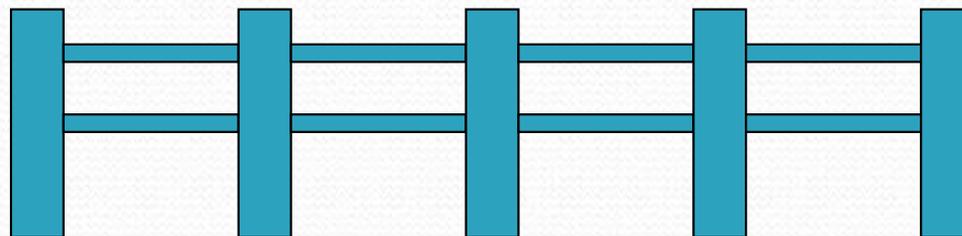

# Fencepost method solution

```
public static void printNumbers(int max) {  
    System.out.print(1);  
    for (int i = 2; i <= max; i++) {  
        System.out.print(", " + i);  
    }  
    System.out.println();    // to end the line  
}
```

- Alternate solution: Either first or last "post" can be taken out:

```
public static void printNumbers(int max) {  
    for (int i = 1; i <= max - 1; i++) {  
        System.out.print(i + ", ");  
    }  
    System.out.println(max);    // to end the line  
}
```

# Fencepost question

- Write a method `printPrimes` that prints all prime numbers up to a given maximum in the following format.
  - Example: `printPrimes(50)` prints  
`[2 3 5 7 11 13 17 19 23 29 31 37 41 43 47]`
- To find primes, write a method `countFactors` which returns the number of factors of an integer.
  - `countFactors(60)` returns 12 because  
1, 2, 3, 4, 5, 6, 10, 12, 15, 20, 30, and 60 are factors of 60.

# Fencepost answer

```
public class Primes {
    public static void main(String[] args) {
        printPrimes(50);
        printPrimes(1000);
    }

    // Prints all prime numbers up to the given max.
    public static void printPrimes(int max) {
        System.out.print("[2");
        for (int i = 3; i <= max; i++) {
            if (countFactors(i) == 2) {
                System.out.print(" " + i);
            }
        }
        System.out.println("]");
    }
}
```

# Fencepost answer, continued

```
// Returns how many factors the given number has.  
// Note: this is also in ch04-1 slides  
public static int countFactors(int number) {  
    int count = 0;  
    for (int i = 1; i <= number; i++) {  
        if (number % i == 0) {  
            count++; // i is a factor of number  
        }  
    }  
    return count;  
}  
}
```

# while loops

**reading: 5.1**

self-check: 1 - 10

exercises: 1 - 2

# Categories of loops

- **definite loop:** Executes a known number of times.
  - The `for` loops we have seen are definite loops.
  - Examples:
    - Print "hello" 10 times.
    - Find all the prime numbers up to an integer  $n$ .
    - Print each odd number between 5 and 127.
- **indefinite loop:** One where the number of times its body repeats is not known in advance.
  - Examples:
    - Prompt the user until they type a non-negative number.
    - Print random numbers until a prime number is printed.
    - Repeat until the user has types "q" to quit.

# The while loop

- **while loop:** Repeatedly executes its body as long as a logical test is true.


```
while (test) {  
    statement(s);  
}
```

- **Example:**

```
int num = 1;  
while (num <= 200) {  
    System.out.print(num + " ");  
    num = num * 2;  
}
```

- **OUTPUT:**

1 2 4 8 16 32 64 128

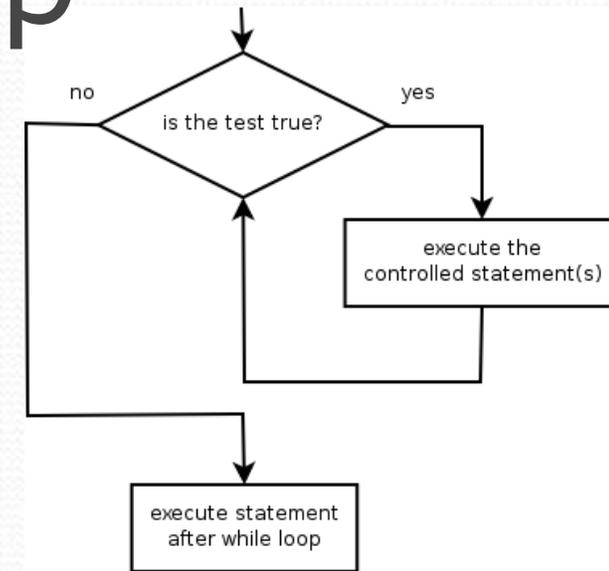

```
// initialization  
// test  
  
// update
```

# Example while loop

```
// finds a number's first factor other than 1
Scanner console = new Scanner(System.in);
System.out.print("Type a number: ");
int number = console.nextInt();
int factor = 2;
while (number % factor != 0) {
    factor++;
}
System.out.println("First factor: " + factor);
```

- Example log of execution:

```
Type a number: 91
First factor: 7
```

- while is better than for here because we don't know how many times we will need to increment to find the factor.

# for vs. while loops

- The `for` loop is just a specialized form of the `while` loop.
  - The following loops are equivalent:

```
for (int num = 1; num <= 200; num = num * 2) {  
    System.out.print(num + " ");  
}
```

```
// actually, not a very compelling use of a while loop  
// (a for loop is better because the # of reps is definite)  
int num = 1;  
while (num <= 200) {  
    System.out.print(num + " ");  
    num = num * 2;  
}
```

# while and Scanner

- while loops are often used with Scanner input.
  - You don't know many times you'll need to re-prompt the user if they type bad data. (an indefinite loop!)
- Write code that repeatedly prompts until the user types a non-negative number, then computes its square root.
  - Example log of execution:

```
Type a non-negative integer: -5
Invalid number, try again: -1
Invalid number, try again: -235
Invalid number, try again: -87
Invalid number, try again: 121
The square root of 121 is 11.0
```

# while loop answer

```
System.out.print("Type a non-negative integer: ");
int number = console.nextInt();

while (number < 0) {
    System.out.print("Invalid number, try again: ");
    number = console.nextInt();
}

System.out.println("The square root of " + number +
    " is " + Math.sqrt(number));
```

- Notice that `number` has to be declared outside the loop.

# Sentinel loops

**reading: 5.1**

self-check: 5

exercises: 1, 2

videos: Ch. 5 #4

# Sentinel values

- **sentinel:** A value that signals the end of user input.
  - **sentinel loop:** Repeats until a sentinel value is seen.
- **Example:** A program that repeatedly prompts the user for numbers until the user types -1, then outputs their sum.
  - (In this case, -1 is the sentinel value.)

```
Enter a number (-1 to quit): 10  
Enter a number (-1 to quit): 25  
Enter a number (-1 to quit): 35  
Enter a number (-1 to quit): -1  
The sum is 70
```

# A second sentinel problem

- Exercise: Write a program that repeatedly prompts the user for words until the user types "goodbye", then outputs the longest word that was typed.
  - (In this case, "goodbye" is the sentinel value.)

Type a word (or "goodbye" to quit): Obama

Type a word (or "goodbye" to quit): McCain

Type a word (or "goodbye" to quit): Biden

Type a word (or "goodbye" to quit): Palin

Type a word (or "goodbye" to quit): goodbye

The longest word you typed was "McCain" (6 letters)

# Flawed sentinel solution

- What's wrong with this solution?

```
Scanner console = new Scanner(System.in);
String longest = "";
String word = ""; // "dummy value"; anything but "goodbye"
while (!word.equals("goodbye")) {
    System.out.print("Type a word (or \"goodbye\" to quit): ");
    word = console.next();
    if (word.length() > longest.length()) {
        longest = word;
    }
}
System.out.println("The longest word you typed was \"" +
    longest + "\" (" + longest.length() + " letters)");
```

- The solution produces the wrong output!

The longest word you typed was "goodbye" (7 letters)

# The problem

- Our code uses a pattern like this:  
*longest = empty string.*  
*while (input is not the sentinel) {*  
    *prompt for input; read input.*  
    *check if input is longest; if so, store it.*  
*}*
- On the last pass, the sentinel is added to the sum:  
*prompt for input; read input ("goodbye").*  
*check if input is longest; if so, store it.*
- This is a fencepost problem.
  - We must read  $N$  words, but only process the first  $N-1$  of them.

# A fencepost solution

- We need to use a pattern like this:

*longest = empty string.*

*prompt for input; read input.*

*// place 1st "post"*

*while (input is not the sentinel) {*

*check if input is longest; if so, store it.*

*// place a "wire"*

*prompt for input; read input.*

*// place a "post"*

*}*

- Sentinel loops often utilize a fencepost "loop-and-a-half" solution by pulling some code out of the loop.

# Correct code

- This solution produces the correct output:

```
Scanner console = new Scanner(System.in);
String longest = "";

// moved one "post" out of loop
System.out.print("Type a word (or \"goodbye\" to quit): ");
String word = console.next();

while (!word.equals("goodbye")) {
    if (word.length() > longest.length()) {
        longest = word;        // moved to top of loop
    }
    System.out.print("Type a word (or \"goodbye\" to quit): ");
    word = console.next();
}

System.out.println("The longest word you typed was \"" +
    longest + "\" (" + longest.length() + " letters)");
```

# Constant with sentinel

- A better solution uses a constant for the sentinel:

```
public static final String SENTINEL = "goodbye";
```

- This solution uses the constant:

```
Scanner console = new Scanner(System.in);  
System.out.print("Type a word (or \" + SENTINEL + "\" to quit): ");  
String word = console.next();  
String longest = "";
```

```
while (!word.equals(SENTINEL)) {  
    if (word.length() > longest.length()) {  
        longest = word;        // moved to top of loop  
    }  
    System.out.print("Type a word (or \" + SENTINEL + "\" to quit): ");  
    word = console.next();  
}
```

```
System.out.println("The longest word you typed was \" +  
    longest + "\" (" + longest.length() + " letters)");
```

# Sentinel number problem

- Solution to the "sum numbers until -1 is typed" problem:

```
Scanner console = new Scanner(System.in);
int sum = 0;
System.out.print("Enter a number (-1 to quit): ");
int number = console.nextInt();

while (number != -1) {
    sum = sum + number;    // moved to top of loop
    System.out.print("Enter a number (-1 to quit): ");
    number = console.nextInt();
}

System.out.println("The sum is " + sum);
```