

# List comprehensions

Ruth Anderson  
UW CSE 160  
Autumn 2021

# Three Ways to Define a List

- Explicitly write out the whole thing:

```
squares = [0, 1, 4, 9, 16, 25, 36, 49, 64, 81, 100]
```

- Write a loop to create it:

```
squares = []  
for i in range(11):  
    squares.append(i * i)
```

- Write a list comprehension:

```
squares = [i * i for i in range(11)]
```

- A list comprehension is a concise description of a list
- A list comprehension is shorthand for a loop

# List Comprehensions

Simplest Form:

```
result = [<expression> for <item> in <sequence>]
```

Examples:

```
squares = [i * i for i in range(11)]
```

```
tens = [x * 10 for x in range(1, 11)]
```

```
hundreds = [i * 10 for i in tens]
```

```
letters = [x for x in "snow"]
```

# Convert Centigrade to Fahrenheit

```
ctemps = [17.1, 22.3, 18.4, 19.1]
```

## With a loop:

```
ftemps = []  
for c in ctemps:  
    f = celsius_to_fahrenheit(c)  
    ftemps.append(f)
```

## With a list comprehension:

```
ftemps = [celsius_to_fahrenheit(c) for c in ctemps]
```

The comprehension is usually shorter, more readable, and more efficient

# Cubes of the first 10 natural numbers

## Goal:

Produce: [0, 1, 8, 27, 64, 125, 216, 343, 512, 729]

## With a loop:

```
cubes = []  
for x in range(10):  
    cubes.append(x ** 3)
```

## With a list comprehension:

```
cubes = [x ** 3 for x in range(10)]
```

# Powers of 2: ( $2^0$ through $2^{10}$ )

**Goal:** [1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1024]

```
powers = [2 ** i for i in range(11)]
```

# Lengths of elements of a list

**Goal:** Write a list comprehension that computes the length of each string in the list colors.

```
colors = ["red", "blue", "purple", "gold", "orange"]  
lengths = [**your expression goes here**]
```

⇒ [3, 4, 6, 4, 6]

# Lengths of elements of a list

**Goal:** Write a list comprehension that computes the length of each string in the list colors.

```
colors = ["red", "blue", "purple", "gold", "orange"]  
lengths = [**your expression goes here**]
```

⇒ [3, 4, 6, 4, 6]

```
lengths = [len(x) for x in colors]
```



# List Comprehensions with Conditionals

Can add conditionals:

```
result = [<expression> for <item> in <sequence> if <condition>]
```

Example:

```
squares = [i * i for i in range(11)]  
sq_over_ten = [x for x in squares if x > 10]
```

# Extract values greater than 10

**Goal:** Given a list, create a list containing ONLY the values from the original list that are greater than 10

## With a loop:

```
big_vals = []
for x in input_list:
    if x > 10:
        big_vals.append(x)
```

## With a list comprehension:

```
big_vals = [x for x in input_list if x > 10]
```

# Even elements of a list

**Goal:** Given an input list `nums`,  
produce a list of the even numbers in `nums`

```
nums = [3, 1, 4, 1, 5, 9, 2, 6, 5]
```

```
evens = [**your expression goes here**]
```

⇒ [4, 2, 6]

# Even elements of a list


**Goal:** Given an input list `nums`,  
produce a list of the even numbers in `nums`

`nums = [3, 1, 4, 1, 5, 9, 2, 6, 5]`  
 $\Rightarrow$  `[4, 2, 6]`

```
evens = [x for x in nums if x % 2 == 0]
```

# Syntax of a comprehension

```
[ (x, y) for x in seq1 for y in seq2 if sim(x, y) > threshold ]
```

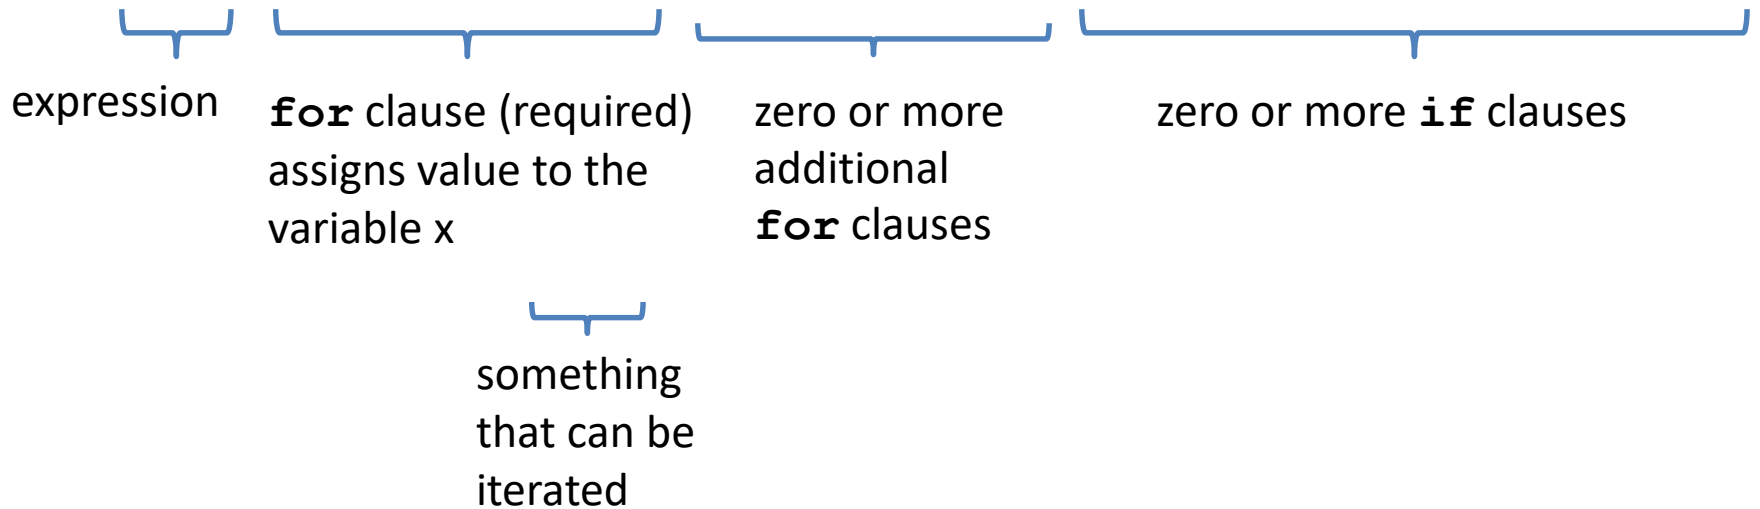

# Semantics of a comprehension

```
result =
```

```
[(x, y) for x in seq1 for y in seq2 if sim(x, y) > threshold]
```

```
result = []
```

```
for x in seq1:
```

```
    for y in seq2:
```

```
        if sim(x, y) > threshold:
```

```
            result.append((x, y))
```

```
... use result ...
```

# Types of comprehensions

## List

```
[i * 2 for i in range(3)]
```

## Set

```
{i * 2 for i in range(3)}
```

## Dictionary

```
{key: value for item in sequence ...}  
{i: i * 2 for i in range(3)}
```

# Dictionary of squares

**Goal:** Given an input list `nums`, produce a dictionary that maps each number to the square of that number.

```
nums = [3, 1, 4, 5, 9, 2, 6, 7]
square_dict = {**your expression goes here**}
```



# Dictionary of squares

**Goal:** Given an input list `nums`, produce a dictionary that maps each number to the square of that number.

```
nums = [3, 1, 4, 5, 9, 2, 6, 7]  
square_dict = {**your expression goes here**}
```

```
square_dict = {x: x ** 2 for x in nums}
```

# Normalize a list

```
num_list = [6, 4, 2, 8, 9, 10, 3, 2, 1, 3]  
total = sum(num_list)
```

## With a loop:

```
for i in range(len(num_list)):  
    num_list[i] = num_list[i] / total
```

## With a list comprehension:

```
num_list = [num / total for num in num_list]
```

# Dice Rolls

**Goal:** A list of all possible dice rolls.

**With a loop:**

```
rolls = []  
for r1 in range(1, 7):  
    for r2 in range(1, 7):  
        rolls.append((r1, r2))
```

**With a list comprehension:**

```
rolls = [(r1, r2) for r1 in range(1, 7)  
          for r2 in range(1, 7)]
```

# All above-average 2-die rolls

**Goal:** Result list should be a list of 2-tuples:

```
[(2, 6), (3, 5), (3, 6), (4, 4), (4, 5), (4, 6), (5, 3), (5, 4), (5, 5), (5, 6),  
(6, 2), (6, 3), (6, 4), (6, 5), (6, 6)]
```

```
[(r1, r2) for r1 in range(1, 7)  
           for r2 in range(1, 7)  
           if r1 + r2 > 7]
```

**OR**

```
[(r1, r2) for r1 in range(1, 7)  
           for r2 in range(8 - r1, 7)]
```

# Sum of above-average 2-die rolls

**Goal:** Result list should be a list of integers:

```
[r1 + r2 for r1 in range(1, 7)
          for r2 in range(1, 7)
          if r1 + r2 > 7]
```

⇒ [8, 8, 9, 8, 9, 10, 8, 9, 10, 11, 8, 9, 10, 11, 12]

**Remove Duplicates: Use Set Comprehensions**

```
{r1 + r2 for r1 in range(1, 7)
          for r2 in range(1, 7)
          if r1 + r2 > 7}
```

⇒ {8, 9, 10, 11, 12}

# Making a Grid

**Goal:** A grid where each element is the sum of its row # and column #.  
(e.g. `[[0, 1, 2], [1, 2, 3]]`)

**With a loop:**

```
grid = []
for i in range(2):
    row = []
    for j in range(3):
        row.append(i + j)
    grid.append(row)
```

**With a list comprehension:**

```
grid = [[i + j for j in range(3)] for i in range(2)]
```

# A word of caution

List comprehensions are great, but they can get confusing. Err on the side of readability.

```
nums = [n for n in range(100) if
        sum([int(j) for j in str(n)]) % 7 == 0]
```

or

```
nums = []
for n in range(100):
    digit_sum = sum([int(j) for j in str(n)])
    if digit_sum % 7 == 0:
        nums.append(n)
```

# A word of caution

List comprehensions are great, but they can get confusing. Err on the side of readability.

```
nums = [n for n in range(100) if
        sum([int(j) for j in str(n)]) % 7 == 0]
```

or

```
def sum_digits(n):
    digit_list = [int(i) for i in str(n)]
    return sum(digit_list)
```

```
nums = [n for n in range(100) if
        sum_digits(n) % 7 == 0]
```