

Full Name: \_\_\_\_\_

Email Address (UW Net ID): \_\_\_\_\_@uw.edu

Section: \_\_\_\_\_

## CSE 160 Autumn 2024 - Midterm Exam

### Instructions:

- You have **40 minutes** to complete this exam.
- The exam is **closed book**, including no calculators, computers, phones, watches or other electronics.
- You are allowed a single sheet of notes for yourself.
- We also provide a syntax reference sheet.
- Turn in *all sheets* of this exam, together and in the same order when you are finished.
- When time has been called, you must put down your pencil and stop writing.
  - **Points will be deducted if you are still writing after time has been called.**
- You may only use parts and features of Python that have been covered in class up to this point.
- You may ask questions by raising your hand, and a TA will come over to you.

**Good luck!**

Question	Topic
Question 1	Expressions
Question 2	File I/O
Question 3	Nested Loops
Question 4	Dictionaries
Question 5	Nested Lists

1. Given the table below, fill in the correct values and type for the matching expression. If there is an error, write "Error" in the value column. (You may leave the type column blank, and you do *not* have to explain the error.)

Expression	Value	Type
<code>{"a": 10, "b": 20}["c"]</code>		
<code>[1, 2, 3][1] + (4, 5)[0]</code>		
<code>"10" + 6 / 2</code>		
<code>len([1, 2, 3, 4]) / 2</code>		
<code>x = set([5, 6, 7, 8]) x.add([9, 10, 11, 12])</code>		

2. For this problem, you are given a file named `list_of_points.txt`. The contents of this file are shown below:

`list_of_points.txt`

```
Point1: 1 2 3 4
Point2: 5 6 7 8
Point3: 0 0 0 0
```

Predict the output of the following lines of code if it is given this file as input.

```
my_file = open("list_of_points.txt")
for line in my_file:
    words = line.split()
    point = []
    for coordinate in words[1:]:
        point.append(int(coordinate))
    print(words[0], point)
my_file.close()
```



4. The sub-question (a) on the next page uses the following code.

```
1     def category_grade(earned, possible):
2         earned_points = 0
3         total_possible = 0
4         for i in range(len(earned)):
5             earned_points += earned[i]
6             total_possible += possible[i]
7         return earned_points / total_possible
8
9     def calculate_total_grade(earned, possible, weights):
10        total = 0
11        for i in range(len(weights)):
12            category_grade = category_grade(earned[i], possible[i])
13            total += category_grade * (weights[i] / 100)
14        return total * 100
```

These functions are designed to calculate the total grade for a student based on earned points, possible points, and weights for different categories of assignments.

This code was initially written assuming `weights` was a list and that `earned_points` and `possible_points` were nested lists. Now, they have been converted to dictionaries with keys "homework", "participation", and "exams", but the code has **not** yet been updated to reflect this change. Below are examples of how these structures looked as lists and then after the change to use dictionaries.

BEFORE (as lists)	AFTER (as dictionaries)
<pre>earned = [     [8, 9, 7],     [4, 3],     [25] ]  possible = [     [10, 10, 10],     [5, 5],     [30] ]  weights = [50, 20, 30]</pre>	<pre>earned = {     "homework": [8, 9, 7],     "participation": [4, 3],     "exams": [25] }  possible = {     "homework": [10, 10, 10],     "participation": [5, 5],     "exams": [30] }  weights = {     "homework": 50,     "participation": 20,     "exams": 30 }</pre>

- a) Identify which line(s) in the `category_grade` and `calculate_total_grade` functions need to be changed in order to make it work with `earned` and `possible` as dictionaries. Then, describe the necessary change, written as the code to replace the identified line(s).

Line number(s): \_\_\_\_\_

Change(s) required:

5. Doctors can use MRI (Magnetic Resonance Imaging) scans of parts of your body to diagnose certain diseases without having to perform surgery. Because our organs are 3-dimensional, these images are also 3D (unlike the 2D images that you were working with in Homework 3). If we wanted to represent this in Python, we would have to use 3D *voxels* rather than 2D pixels as shown below.

An example 2 x 2 pixel\_grid:


```
pixel_grid = [[1, 15],  
              [20, 5]]
```

Rendered as a grid like so:

1	15
20	5


An example 2 x 2 x 2 voxel\_grid:

```
voxel_grid = [  
    [[3, 2],  
     [2, 3]],  
  
    [[2, 4],  
     [4, 2]]  
]
```

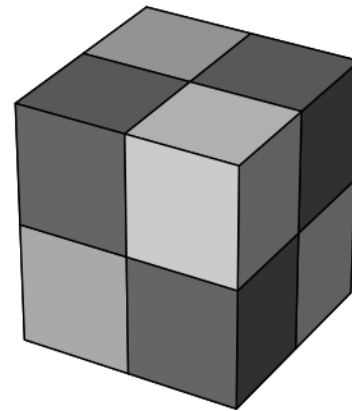

You can view these voxel grids as a series of 2D grids stacked together. For example, below is a 3 x 3 x 2 voxel grid and its rendering. (Each value in the grid for these renderings represents the color of an individual block, just as it might for a pixel in the 2D grids.)

```
voxel_grid = [  
    [[3, 4, 2],  
     [4, 2, 3],  
     [2, 3, 4]],  
  
    [[3, 2, 4],  
     [2, 3, 2],  
     [3, 4, 3]]  
]
```

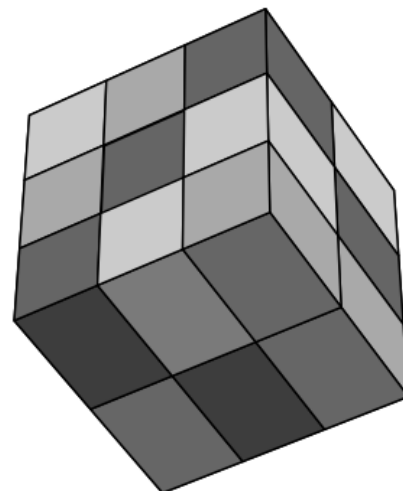

- a) Implement a function called `remove_noise` which when given a `voxel_grid` returns a \*new\* `voxel_grid` that has 0s in place of all voxels with values  $< 10$ , with all other voxels being the same as the original. Altering the parameter `voxel_grid` will not give you full credit for this question.

```
def remove_noise(voxel_grid):  
    # Write code here
```



*Extra Credit (one point):* Write a one-liner joke about programming, computers, python, or a similar topic of your choice. For example:

What do you call a snake that's good at math *and* programming? A Pi-thon!

(You may not use this one. 🐍😎)