

Induction

CSE 311 Autumn 20
Lecture 14

How do we know recursion works?

```
//Assume i is a nonnegative integer
//returns 2^i.
public int CalculatesTwoToTheI(int i) {
    if (i == 0)
        return 1;
    else
        return 2 * CalculatesTwoToTheI(i-1);
}
```

Fill out the poll everywhere for
Activity Credit!

Go to pollev.com/cse311 and
login with your UW identity
Or text cse311 to 22333

Why does CalculatesTwoToTheI(4) calculate 2^4 ?

Convince the other people in your room

"the function returns 2^0 when n is 0, This allows it to return 2^1 correctly, 2^2 correctly, and soon"
"We show that for each case this method works (base and recursive)"

How do we know recursion works?

Something like this:

Well, as long as CalculatesTwoToTheI(3) = 8, we get 16...

Which happens as long as CalculatesTwoToTheI(2) = 4

Which happens as long as CalculatesTwoToTheI(1) = 2

Which happens as long as CalculatesTwoToTheI(0) = 1

And it is! Because that's what the base case says.

How do we know recursion works?

There's really only two cases.

The Base Case is Correct

`CalculatesTwoToTheI(0) = 1` (which it should!)

And that means `CalculatesTwoToTheI(1) = 2`, (like it should)

And that means `CalculatesTwoToTheI(2) = 4`, (like it should)

And that means `CalculatesTwoToTheI(3) = 8`, (like it should)

And that means `CalculatesTwoToTheI(4) = 16`, (like it should)

IF the recursive call we make is correct
THEN our value is correct.

How do we know recursion works?

The code has two big cases,
So our proof had two big cases

“The base case of the code produces the correct output”

“IF the calls we rely on produce the correct output THEN the current call produces the right output”

A bit more formally...

"The base case of the code produces the correct output"

"IF the calls we rely on produce the correct output THEN the current call produces the right output"

Let $P(i)$ be "CalculatesTwoToTheI(i)" returns 2^i .

How do we know $P(4)$?

$P(0)$ is true.

And $P(0) \rightarrow P(1)$, so $P(1)$.

And $P(1) \rightarrow P(2)$, so $P(2)$.

And $P(2) \rightarrow P(3)$, so $P(3)$.

And $P(3) \rightarrow P(4)$, so $P(4)$.

A bit more formally...

This works alright for $P(4)$.

What about $P(1000)$? $P(1000000000)$?

At this point, we'd need to show that implication $P(k) \rightarrow P(k + 1)$ for A BUNCH of values of k .

But the code is the same each time.

And so was the argument!

We should instead show $\forall k [P(k) \rightarrow P(k + 1)]$.

Induction

Your new favorite proof technique!

How do we show $\forall n, P(n)$?

Show $P(0)$

Show $\forall k(P(k) \rightarrow P(k + 1))$
 \downarrow k is the last k in the $P(k)$

Induction

```
//Assume i is a nonnegative integer
public int CalculatesTwoToTheI(int i){
    if(i == 0)
        return 1;
    else
        return 2*CaclulatesTwoToTheI(i-1);
}
```

$P(0)$

Let $P(i)$ be "CalculatesTwoToTheI(i)" returns 2^i .

Note that if the input i is 0, then the if-statement evaluates to true, and $1 = 2^0$ is returned, so $P(0)$ is true.

Suppose $P(k)$ holds for an arbitrary $k \geq 0$.

$k+1 \geq 1$ (b/c $k \geq 0$) \rightarrow on input $k+1$, we're in the else branch.

\rightarrow return $2 * \text{Ca} \dots (k)$

By $P(k) = 2 * 2^k = 2^{k+1}$

So $P(k+1)$ holds.

Therefore $P(n)$ holds for all $n \geq 0$ by the principle of induction.

Making Induction Proofs Pretty

Let $P(i)$ be "CalculatesTwoToTheI(i) returns 2^i ".

Base Case ($i = 0$) Note that if the input i is 0, then the if-statement evaluates to true, and $1 = 2^0$ is returned, so $P(0)$ is true.

Inductive Hypothesis: Suppose $P(k)$ holds for an arbitrary $k \geq 0$.

Inductive Step: Since $k \geq 0$, $k + 1 \geq 1$, so the code goes to the recursive case. We will return $2 \cdot \text{CalculatesTwoToTheI}(k)$. By Inductive Hypothesis, $\text{CalculatesTwoToTheI}(k) = 2^k$. Thus we return $2 \cdot 2^k = 2^{k+1}$.

So $P(k + 1)$ holds.

Therefore $P(n)$ holds for all $n \geq 0$ by the principle of induction.

Making Induction Proofs Pretty

All of our induction proofs will come in 5 easy(?) steps!

1. Define $P(n)$. State that your proof is by induction on n .
2. Show $P(0)$ i.e. show the base case
3. Suppose $P(k)$ for an arbitrary k .
4. Show $P(k + 1)$ (i.e. get $P(k) \rightarrow P(k + 1)$)
5. Conclude by saying $P(n)$ is true for all n by induction.


Some Other Notes

Always state where you use the inductive hypothesis when you're using it in the inductive step.

It's usually the key step, and the reader really needs to focus on it.

Be careful about what values you're assuming the Inductive Hypothesis for – the smallest possible value of k should assume the base case but nothing more.

The Principle of Induction (formally)

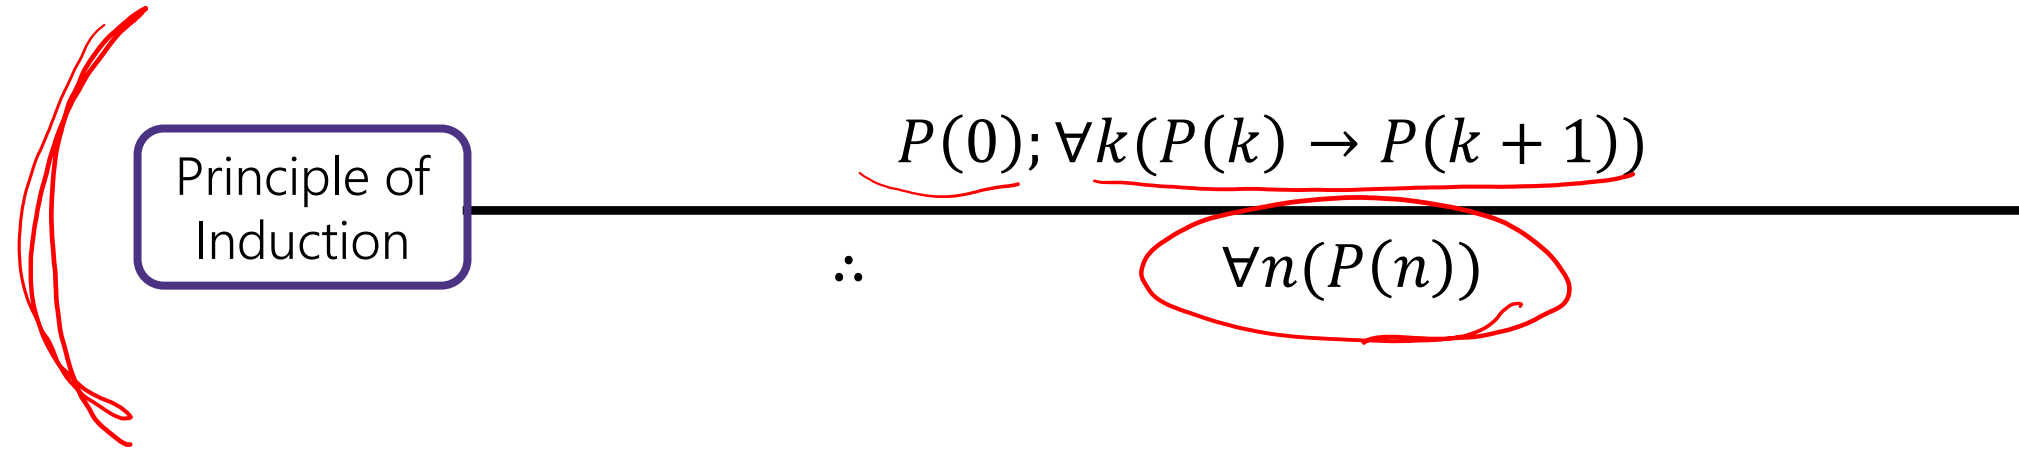

Informally: if you knock over one domino, and every domino knocks over the next one, then all your dominoes fell over.

More Induction

Induction doesn't **only** work for code!

Show that $\sum_{i=0}^n 2^i = 1 + 2 + 4 + \dots + 2^n = 2^{n+1} - 1$.

More Induction

Induction doesn't **only** work for code!

Show that $\sum_{i=0}^n 2^i = 1 + 2 + 4 + \dots + 2^n = 2^{n+1} - 1$.

Let $P(n) = \text{"}\sum_{i=0}^n 2^i = 2^{n+1} - 1\text{"}$

We show $P(n)$ holds for all n by induction on n .

Base Case ()

Inductive Hypothesis:

Inductive Step:

$P(n)$ holds for all $n \geq 0$ by the principle of induction.

More Induction

Induction doesn't **only** work for code!

Show that $\sum_{i=0}^n 2^i = 1 + 2 + 4 + \dots + 2^n = 2^{n+1} - 1$.

Let $P(n) = \text{"}\sum_{i=0}^n 2^i = 2^{n+1} - 1\text{"}$.

We show $P(n)$ holds for all n by induction on n .

Base Case ($n = 0$) $\sum_{i=0}^0 2^i = 1 = 2 - 1 = 2^{0+1} - 1$.

Inductive Hypothesis: Suppose $P(k)$ holds for an arbitrary $k \geq 0$.

Inductive Step: We show $P(k + 1)$. Consider the summation $\sum_{i=0}^{k+1} 2^i = 2^{k+1} + \sum_{i=0}^k 2^i = 2^{k+1} + 2^{k+1} - 1$, where the last step is by IH.

Simplifying, we get: $\sum_{i=0}^{k+1} 2^i = 2^{k+1} + 2^{k+1} - 1 = 2 \cdot 2^{k+1} - 1 = 2^{(k+1)+1} - 1$.

$P(n)$ holds for all $n \geq 0$ by the principle of induction.