

CSE 322: Midterm Review

◆ Basic Concepts (Chapter 0)

⇒ Sets

◆ Notation and Definitions

- $A = \{x \mid \text{rule about } x\}$, $x \in A$, $A \subseteq B$, $A = B$
- \exists (“there exists”), \forall (“for all”)

◆ Finite and Infinite Sets

- Set of natural numbers \mathbb{N} , integers \mathbb{Z} , reals \mathbb{R} etc.
- Empty set \emptyset

◆ Set operations: Know the definitions for proofs

- Union: $A \cup B = \{x \mid x \in A \text{ or } x \in B\}$
- Intersection $A \cap B = \{x \mid x \in A \text{ and } x \in B\}$
- Complement $\bar{A} = \{x \mid x \notin A\}$

Basic Concepts (cont.)

◆ Set operations (cont.)

- ⇒ Power set of $A = \text{Pow}(A)$ or $2^A = \text{set of all subsets of } A$
 - ◆ E.g. $A = \{0,1\} \Rightarrow 2^A = \{\emptyset, \{0\}, \{1\}, \{0,1\}\}$
- ⇒ Cartesian Product $A \times B = \{(a,b) \mid a \in A \text{ and } b \in B\}$

◆ Functions:

- ⇒ $f: \text{Domain} \rightarrow \text{Range}$
 - ◆ $\text{Add}(x,y) = x + y \Rightarrow \text{Add}: \mathbb{Z} \times \mathbb{Z} \rightarrow \mathbb{Z}$
- ⇒ Definitions of 1-1 and onto (bijection if both)


Strings

- ◆ Alphabet Σ = finite set of symbols, e.g. $\Sigma = \{0,1\}$
- ◆ String w = finite sequence of symbols $\in \Sigma$
 - ⇒ $w = w_1w_2\dots w_n$
- ◆ String properties: Know the definitions
 - ⇒ Length of $w = |w|$ ($|w| = n$ if $w = w_1w_2\dots w_n$)
 - ⇒ Empty string = ϵ (length of $\epsilon = 0$)
 - ⇒ Substring of w
 - ⇒ Reverse of $w = w^R = w_nw_{n-1}\dots w_1$
 - ⇒ Concatenation of strings x and y (append y to x)
 - ⇒ y^k = concatenate y to itself to get string of k y 's
 - ⇒ Lexicographical order = order based on length and dictionary order within equal length

Languages and Proof Techniques

- ◆ Language L = set of strings over an alphabet (i.e. $L \subseteq \Sigma^*$)
 - ⇒ E.g. $L = \{0^n1^n \mid n \geq 0\}$ over $\Sigma = \{0,1\}$
 - ⇒ E.g. $L = \{p \mid p \text{ is a syntactically correct C++ program}\}$ over $\Sigma =$ ASCII characters
- ◆ Proof Techniques: Look at lecture slides, handouts, and notes
 1. Proof by counterexample
 2. Proof by contradiction
 3. Proof of set equalities ($A = B$)
 4. Proof of “iff” ($X \Leftrightarrow Y$) statements (prove both $X \Rightarrow Y$ and $X \Leftarrow Y$)
 5. Proof by construction
 6. Proof by induction
 7. Pigeonhole principle
 8. Dovetailing to prove a set is countably infinite E.g. \mathbb{Z} or $\mathbb{N} \times \mathbb{N}$
 9. Diagonalization to prove a set is uncountable E.g. $2^{\mathbb{N}}$ or Reals

Chapter 1 Review: Languages and Machines

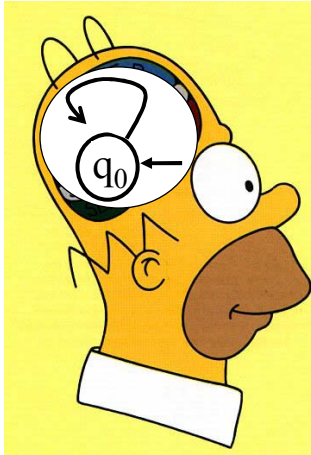

Languages and Machines (Chapter 1)

- ◆ Language = set of strings over an alphabet
 - ⇒ Empty language = language with no strings = \emptyset
 - ⇒ Language containing only empty string = $\{\epsilon\}$
- ◆ DFAs
 - ⇒ Formal definition $M = (Q, \Sigma, \delta, q_0, F)$
 - ⇒ Set of states Q , alphabet Σ , start state q_0 , accept (“final”) states F , transition function $\delta: Q \times \Sigma \rightarrow Q$
 - ⇒ M recognizes language $L(M) = \{w \mid M \text{ accepts } w\}$
 - ⇒ In class examples:
 - E.g. DFA for $L(M) = \{w \mid w \text{ ends in } 0\}$
 - E.g. DFA for $L(M) = \{w \mid w \text{ does not contain } 00\}$
 - E.g. DFA for $L(M) = \{w \mid w \text{ contains an even \# of } 0\text{'s}\}$
 - Try: DFA for $L(M) = \{w \mid w \text{ contains an even \# of } 0\text{'s and an odd number of } 1\text{'s}\}$

Languages and Machines (cont.)

- ◆ Regular Language = language recognized by a DFA
- ◆ Regular operations: Union \cup , Concatenation \circ and star $*$
 - ◇ Know the definitions of $A \cup B$, $A \circ B$ and A^*
 - ◇ $\Sigma = \{0,1\} \Rightarrow \Sigma^* = \{\epsilon, 0, 1, 00, 01, \dots\}$
- ◆ Regular languages are closed under the regular operations
 - ◇ Means: If A and B are regular languages, we can show $A \cup B$, $A \circ B$ and A^* (and also B^*) are regular languages
 - ◇ Cartesian product construction for showing $A \cup B$ is regular by simulating DFAs for A and B in parallel
- ◆ Other related operations: $A \cap B$ and complement \bar{A}
 - ◇ Are regular languages closed under these operations?

NFAs, Regular expressions, and GNFA's

- ◆ NFAs vs DFAs
 - ◇ DFA: $\delta(\text{state}, \text{symbol}) = \text{next state}$
 - ◇ NFA: $\delta(\text{state}, \text{symbol or } \epsilon) = \text{set of next states}$
 - ◆ Features: Missing outgoing edges for one or more symbols, multiple outgoing edges for same symbol, ϵ -edges
 - ◇ Definition of: NFA N accepts a string $w \in \Sigma^*$
 - ◇ Definition of: NFA N recognizes a language $L(N) \subseteq \Sigma^*$
 - ◇ E.g. NFA for $L = \{w \mid w = x1a, x \in \Sigma^* \text{ and } a \in \Sigma\}$
- ◆ Regular expressions: Base cases ϵ , \emptyset , $a \in \Sigma$, and $R1 \cup R2$, $R1 \circ R2$ or $R1^*$
- ◆ GNFA's = NFAs with edges labeled by regular expressions
 - ◇ Used for converting NFAs/DFAs to regular expressions

Main Results and Proofs

- ◆ L is a Regular Language iff
 - ⇒ L is recognized by a DFA iff
 - ⇒ L is recognized by an NFA iff
 - ⇒ L is recognized by a GNFA iff
 - ⇒ L is described by a Regular Expression

- ◆ Proofs:
 - ⇒ NFA→DFA: subset construction (1 DFA state=subset of NFA states)
 - ⇒ DFA→GNFA→Reg Exp: Repeat two steps:
 1. Collapse two parallel edges to one edge labeled $(a \cup b)$, and
 2. Replace edges through a state with a loop with one edge labeled (ab^*c)
 - ⇒ Reg Exp→NFA: combine NFAs for base cases with ϵ -transitions

Other Results

- ◆ Using NFAs to show that Regular Languages are closed under:
 - ⇒ Regular operations \cup , \circ and $*$


- ◆ Are Regular Languages closed under:
 - ⇒ intersection?
 - ⇒ complement?

- ◆ Are there other operations that regular languages are closed under?

What about the reversal operation?

What about the idon'tcare operation?

What about the subset operation?



R. Rao, CSE 322

11

Other Results

- ◆ Are Regular languages closed under:
 - ⇒ reversal?
 - ⇒ subset (\subseteq) ?
 - ⇒ superset (\supseteq) ?
 - ⇒ Prefix?
 $\text{Prefix}(L) = \{w \mid w \in \Sigma^* \text{ and } wx \in L \text{ for some } x \in \Sigma^*\}$
 - ⇒ NoExtend?
 $\text{NoExtend}(L) = \{w \mid w \in L \text{ but } wx \notin L \text{ for all } x \in \Sigma^* - \{\epsilon\}\}$

Pumping Lemma

- ◆ *Pumping lemma in plain English (sort of):* If L is regular, then there is a p (= number of states of a DFA accepting L) such that any string s in L of length $\geq p$ can be expressed as $s = xyz$ where y is not null (y is the loop in the DFA), $|xy| \leq p$ (loop occurs within p state transitions), and any “pumped” string xy^iz is in L for all $i \geq 0$ (go through the loop 0 or more times).
- ◆ *Pumping lemma in plain Logic:*
 L regular $\Rightarrow \exists p$ s.t. ($\forall s \in L$ s.t. $|s| \geq p$ ($\exists x, y, z \in \Sigma^*$ s.t. ($s = xyz$ and ($|y| \geq 1$) and ($|xy| \leq p$) and ($\forall i \geq 0, xy^iz \in L$)))
- ◆ Is the other direction \Leftarrow also true?
[No! See Problem 1.54 \(1.37 in 1st ed\) for a counterexample](#)

Proving Non-Regularity using the Pumping Lemma

- ◆ Proof by contradiction to show L is not regular
 1. Assume L is regular. Then L must satisfy the P. Lemma.
 2. Let p be the “pumping length”
 3. [Choose a long enough string \$s \in L\$ such that \$|s| \geq p\$](#)
 4. Let x, y, z be strings such that $s = xyz$, $|y| \geq 1$, and $|xy| \leq p$
 5. [Pick an \$i \geq 0\$ such that \$xy^iz \notin L\$ \(for all possible \$x, y, z\$ as in 4\)](#)This contradicts the P. lemma. Therefore, L is not regular
- ◆ Examples: $\{0^n 1^n | n \geq 0\}$, $\{ww | w \in \Sigma^*\}$, $\{0^m | m = n^2\}$, ADD = $\{x = y + z | x, y, z \text{ are binary numbers and } x \text{ is sum of } y \text{ and } z\}$
- ◆ Can sometimes also use closure under \cap (and/or complement)
 - ⇒ E.g. If $L \cap B = L_1$, and B is regular while L_1 is not regular, then L is also not regular (if L was regular, L_1 would be regular)

Some Applications of Regular Languages

- ◆ Pattern matching and searching:
 - ⇒ E.g. In Unix:
 - ◆ `ls *.c`
 - ◆ `cp /myfriends/games/*. * /mydir/`
 - ◆ `grep 'Spock' *trek.txt`
- ◆ Compilers:
 - ⇒ `id ::= letter (letter | digit)*`
 - ⇒ `int ::= digit digit*`
 - ⇒ `float ::= d d*.d*(ε|E d d*)`
 - ⇒ The symbol `|` stands for “or” (= union)

Good luck on the midterm!

- ◆ You can bring one 8 1/2" x 11" review sheet (double-sided ok)
- ◆ The questions sheet will have space for answers. We will also bring extra blank sheets for those of you who don't believe in brevity.

Don't sweat it!



- Go through the homeworks, lecture slides, and examples in the text (Chapters 0 and 1 only)
- Do the practice midterm on the website and avoid being surprised!

