

Disjoint Union / Find

CSE 326
Data Structures
Lecture 13

Reading

- Reading
 - › Chapter 8

2/24/05

Disjoint Union/Find - Lecture 13

2

Disjoint Union - Find

- Maintain a set of pairwise disjoint sets.
 - › {3,5,7} , {4,2,8}, {9}, {1,6}
- Each set has a unique name, one of its members
 - › {3,5,7} , {4,2,8}, {9}, {1,6}

2/24/05

Disjoint Union/Find - Lecture 13

3

Union

- Union(x,y) – take the union of two sets named x and y
 - › {3,5,7} , {4,2,8}, {9}, {1,6}
 - › Union(5,1)
 - {3,5,7,1,6}, {4,2,8}, {9},

2/24/05

Disjoint Union/Find - Lecture 13

4

Find

- Find(x) – return the name of the set containing x.
 - › {3,5,7,1,6}, {4,2,8}, {9},
 - › Find(1) = 5
 - › Find(4) = 8


2/24/05

Disjoint Union/Find - Lecture 13

5

Cute Application

- Build a random maze by erasing edges.




2/24/05

Disjoint Union/Find - Lecture 13

6

Cute Application

- Pick Start and End




2/24/05

Disjoint Union/Find - Lecture 13

7

Cute Application

- Repeatedly pick random edges to delete.



2/24/05

Disjoint Union/Find - Lecture 13

8

Desired Properties


- None of the boundary is deleted
- Every cell is reachable from every other cell.
- There are no cycles – no cell can reach itself by a path unless it retraces some part of the path.

2/24/05

Disjoint Union/Find - Lecture 13

9

A Cycle




2/24/05

Disjoint Union/Find - Lecture 13

10

A Good Solution




2/24/05

Disjoint Union/Find - Lecture 13

11

A Hidden Tree



2/24/05

Disjoint Union/Find - Lecture 13

12

Number the Cells

We have disjoint sets $S = \{ \{1\}, \{2\}, \{3\}, \{4\}, \dots, \{36\} \}$ each cell is unto itself.
We have all possible edges $E = \{ (1,2), (1,7), (2,8), (2,3), \dots \}$ 60 edges total.

Start	1	2	3	4	5	6
	7	8	9	10	11	12
	13	14	15	16	17	18
	19	20	21	22	23	24
	25	26	27	28	29	30
	31	32	33	34	35	36
						End

2/24/05

Disjoint Union/Find - Lecture 13

13

Basic Algorithm

- S = set of sets of connected cells
- E = set of edges
- Maze = set of maze edges initially empty

```

While there is more than one set in S
  pick a random edge (x,y) and remove from E
  u := Find(x);
  v := Find(y);
  if u ≠ v then
    Union(u,v)
  else
    add (x,y) to Maze
All remaining members of E together with Maze form the maze
    
```

2/24/05

Disjoint Union/Find - Lecture 13

14

Example Step

Pick (8,14)

Start	1	2	3	4	5	6
	7	8	9	10	11	12
	13	14	15	16	17	18
	19	20	21	22	23	24
	25	26	27	28	29	30
	31	32	33	34	35	36
						End

S
 $\{1,2,7,8,9,13,19\}$
 $\{3\}$
 $\{4\}$
 $\{5\}$
 $\{6\}$
 $\{10\}$
 $\{11,17\}$
 $\{12\}$
 $\{14,20,26,27\}$
 $\{15,16,21\}$
 $\{22,23,24,29,30,32\}$
 $\{33,34,35,36\}$

2/24/05

Disjoint Union/Find - Lecture 13

15

Example

S $\{1,2,7,8,9,13,19\}$ $\{3\}$ $\{4\}$ $\{5\}$ $\{6\}$ $\{10\}$ $\{11,17\}$ $\{12\}$ $\{14,20,26,27\}$ $\{15,16,21\}$ $\{22,23,24,29,30,32\}$ $\{33,34,35,36\}$	<p>Find(8) = 7 Find(14) = 20</p> <p>Union(7,20)</p>	S $\{1,2,7,8,9,13,19,14,20,26,27\}$ $\{3\}$ $\{4\}$ $\{5\}$ $\{6\}$ $\{10\}$ $\{11,17\}$ $\{12\}$ $\{15,16,21\}$ $\{22,23,24,29,30,32\}$ $\{33,34,35,36\}$
--	---	---

2/24/05

Disjoint Union/Find - Lecture 13

16

Example

Pick (19,20)

Start	1	2	3	4	5	6
	7	8	9	10	11	12
	13	14	15	16	17	18
	19	20	21	22	23	24
	25	26	27	28	29	30
	31	32	33	34	35	36
						End

S
 $\{1,2,7,8,9,13,19,14,20,26,27\}$
 $\{3\}$
 $\{4\}$
 $\{5\}$
 $\{6\}$
 $\{10\}$
 $\{11,17\}$
 $\{12\}$
 $\{15,16,21\}$
 $\{22,23,24,29,30,32\}$
 $\{33,34,35,36\}$

2/24/05

Disjoint Union/Find - Lecture 13

17

Example at the End

Start	1	2	3	4	5	6
	7	8	9	10	11	12
	13	14	15	16	17	18
	19	20	21	22	23	24
	25	26	27	28	29	30
	31	32	33	34	35	36
						End

S
 $\{1,2,3,4,5,6,7,\dots,36\}$

— E
 — Maze


2/24/05

Disjoint Union/Find - Lecture 13

18

Up-Tree for DU/F

Initial state 1 2 3 4 5 6 7

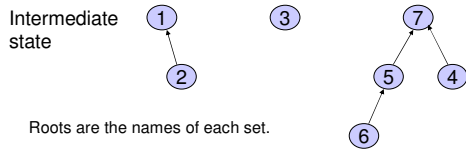


2/24/05

Disjoint Union/Find - Lecture 13

19

Find Operation

- Find(x) follow x to the root and return the root




2/24/05

Disjoint Union/Find - Lecture 13

20

Union Operation

- Union(i,j) - assuming i and j roots, point i to j.

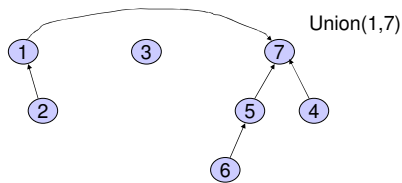

2/24/05

Disjoint Union/Find - Lecture 13


21

Simple Implementation

- Array of indices

	1	2	3	4	5	6	7
up	0	1	0	7	7	5	0

Up[x] = 0 means x is a root.



2/24/05

Disjoint Union/Find - Lecture 13

22

Union

```
Union(up[] : integer array, x,y : integer) : {
  //precondition: x and y are roots//
  Up[x] := y
}
```

Constant Time!

2/24/05

Disjoint Union/Find - Lecture 13

23

Exercise

- Design Find operator
 - Recursive version
 - Iterative version


```
Find(up[] : integer array, x : integer) : integer {
  //precondition: x is in the range 1 to size//
  ???
}
```

2/24/05

Disjoint Union/Find - Lecture 13

24

A Bad Case

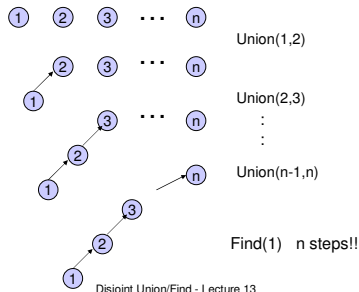

2/24/05


Disjoint Union/Find - Lecture 13

25

Weighted Union

Weighted Union

- Always point the smaller tree to the root of the larger tree

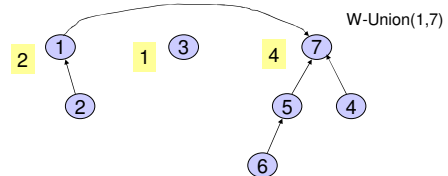


2/24/05

Disjoint Union/Find - Lecture 13

26

Example Again

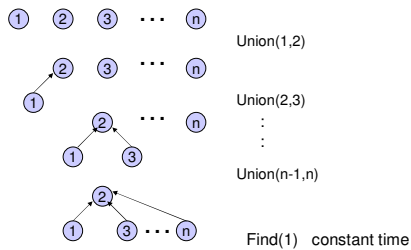


2/24/05

Disjoint Union/Find - Lecture 13

27

Analysis of Weighted Union

- With weighted union an up-tree of height h has weight at least 2^h .
- Proof by induction
 - Basis: $h = 0$. The up-tree has one node, $2^0 = 1$
 - Inductive step: Assume true for all $h' < h$.



2/24/05

Disjoint Union/Find - Lecture 13

28

Analysis of Weighted Union

- Let T be an up-tree of weight n formed by weighted union. Let h be its height.
- $n \geq 2^h$
- $\log_2 n \geq h$
- Find(x) in tree T takes $O(\log n)$ time.
- Can we do better?


2/24/05

Disjoint Union/Find - Lecture 13


29

Worst Case for Weighted Union

$n/2$ Weighted Unions



$n/4$ Weighted Unions




2/24/05

Disjoint Union/Find - Lecture 13

30

Example of Worst Cast (cont')

After $n-1 = n/2 + n/4 + \dots + 1$ Weighted Unions

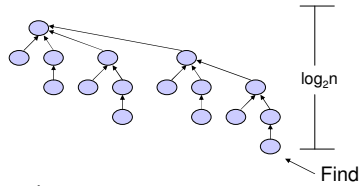


If there are $n = 2^k$ nodes then the longest path from leaf to root has length k .

2/24/05

Disjoint Union/Find - Lecture 13

31

Elegant Array Implementation

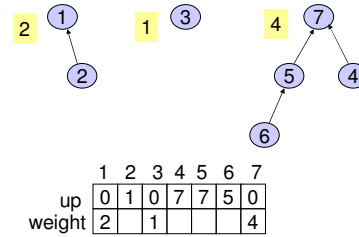

2/24/05

Disjoint Union/Find - Lecture 13

32

Weighted Union

```

W-Union(i, j : index) {
  // i and j are roots //
  wi := weight[i];
  wj := weight[j];
  if wi < wj then
    up[i] := j;
    weight[j] := wi + wj;
  else
    up[j] := i;
    weight[i] := wi + wj;
}
    
```


2/24/05

Disjoint Union/Find - Lecture 13

33

Path Compression

- On a Find operation point all the nodes on the search path directly to the root.

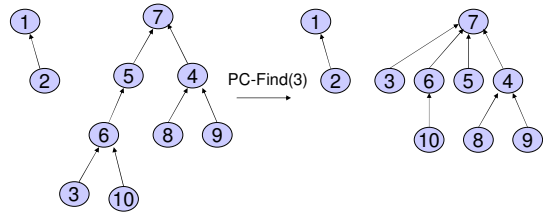


2/24/05

Disjoint Union/Find - Lecture 13

34

Self-Adjustment Works

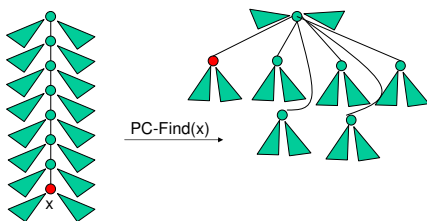

2/24/05

Disjoint Union/Find - Lecture 13

35

Path Compression Find

```


PC-Find(i : index) {
  r := i;
  while up[r] != 0 do //find root//
    r := up[r];
  if i != r then //compress path//
    k := up[i];
    while k != r do
      up[i] := r;
      i := k;
      k := up[k];
    return(r);
}
    
```

2/24/05

Disjoint Union/Find - Lecture 13

36

Example



2/24/05

Disjoint Union/Find - Lecture 13

37

Disjoint Union / Find with Weighted Union and PC

- Worst case time complexity for a W-Union is $O(1)$ and for a PC-Find is $O(\log n)$.
- Time complexity for $m \geq n$ operations on n elements is $O(m \log^* n)$ where $\log^* n$ is a very slow growing function.
 - › $\log^* n < 7$ for all reasonable n . Essentially constant time per operation!
- Using “ranked union” gives an even better bound theoretically.

2/24/05

Disjoint Union/Find - Lecture 13

38

Amortized Complexity

- For disjoint union / find with weighted union and path compression.
 - › average time per operation is essentially a constant.
 - › worst case time for a PC-Find is $O(\log n)$.
- An individual operation can be costly, but over time the average cost per operation is not.

2/24/05

Disjoint Union/Find - Lecture 13

39

Find Solutions

Recursive

```
Find(up[] : integer array, x : integer) : integer {
  //precondition: x is in the range 1 to size//
  if up[x] = 0 then return x
  else return Find(up, up[x]);
}
```

Iterative

```
Find(up[] : integer array, x : integer) : integer {
  //precondition: x is in the range 1 to size//
  while up[x] ≠ 0 do
    x := up[x];
  return x;
}
```

2/24/05

Disjoint Union/Find - Lecture 13

40