


CSE 332


Data Abstractions

Graphs 2: Representing Graphs Topological Sort



A **Directed** Graph is a Thingy...

1

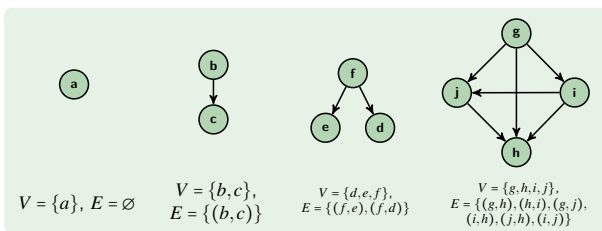


Let's extend our terminology for **directed graphs**!


More Graphs

2

A Lonely Graph



Complete Directed Graph



Some Questions

- How many edges can a **directed** graph with $|V| = n$ have?


$$|E| = n(n-1)$$

- How many edges can a **directed** graph with $|V| = n$ and possible loops have?

$$|E| = n^2$$

New Terminology: Degree

3

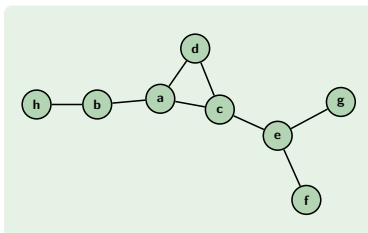


Definition (Degree)

The **degree** of a vertex in a graph is the number of vertices adjacent to it. In the above graph, we have:

a	b	c	d	e	f	g	h
3	2	3	2	3	1	1	1

Burgers? Now?

4

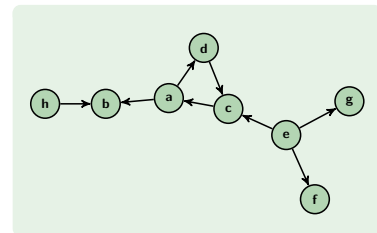

Definition (In & Out Degree)



The **in-degree** of a vertex, v , in a graph is $|\{(x, v) \mid (x, v) \in E, x \in V\}|$.
The **out-degree** of a vertex, v , in a graph is $|\{(v, x) \mid (v, x) \in E, x \in V\}|$.

	a	b	c	d	e	f	g	h
In-Degree	1	2	2	1	0	1	1	0
Out-Degree	2	0	1	1	3	0	0	1



Re-examining Paths and Cycles on Directed Graphs

5

Paths?



Cycle




Making A Connection!


6

Definition (Strongly Connected Directed Graph)

We say a directed graph is **strongly connected** iff for every pair of vertices, $u, v \in V$, there is a path from u to v .



Strongly Connected!



Not Strongly Connected!


Definition (Weakly Connected Directed Graph)

We say a directed graph is **weakly connected** iff the underlying undirected graph is connected.

That is, if we "undirected the edges", if the graph is connected, then the digraph is weakly connected.

Graph Data Structures


7



Adjacency Matrix

	a	b	c	d
a	0	1	1	0
b	1	0	1	0
c	1	1	0	1
d	0	0	1	0

Adjacency List




Adjacency Matrix Analysis

8

Adjacency Matrix

	a	b	c	d
a	0	1	1	0
b	1	0	1	0
c	1	1	0	1
d	0	0	1	0

Adjacency List



Adjacency Matrix Properties

How long to...

- Get a vertex's out-edges? $\mathcal{O}(|V|)$
- Get a vertex's in-edges? $\mathcal{O}(|V|)$
- Check if an edge exists? $\mathcal{O}(1)$
- Insert an edge? $\mathcal{O}(1)$
- Delete an edge? $\mathcal{O}(1)$

Space Requirements: $\mathcal{O}(|V|^2)$

Adjacency Matrices are reasonable for dense graphs, but not otherwise.


Adjacency List Analysis

9

Adjacency Matrix

	a	b	c	d
a	0	1	1	0
b	1	0	1	0
c	1	1	0	1
d	0	0	1	0

Adjacency List



Adjacency List Properties

How long to...

- Get a vertex's out-edges? $\mathcal{O}(d)$
- Get a vertex's in-edges? $\mathcal{O}(|E|)$
 - To fix this, keep a **second** adjacency list going the other way
- Check if an edge exists? $\mathcal{O}(d)$
- Insert an edge? $\mathcal{O}(1)$
- Delete an edge? $\mathcal{O}(d)$

Space Requirements: $\mathcal{O}(|V| + |E|)$


Adjacency Lists should be your goto choice.

Directed Acyclic Graphs: DAGs

10

Definition (DAG)

A **DAG** is a **directed, acyclic** graph.

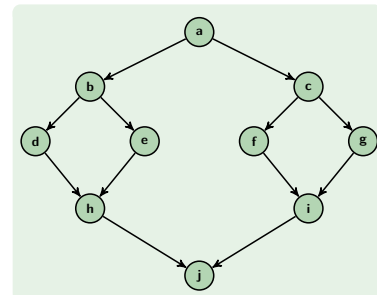

By "acyclic", we mean in the **directed** sense.

DAGs vs. Trees?

Is there a tree that isn't a DAG?

Is there a DAG that isn't a tree?

Directed Acyclic Graphs: DAGs

11

DAGs vs. Trees?

All trees are DAGs (remember, trees must be acyclic and connected!).

Not all DAGs are trees. See previous slide. Also, DAGs don't have to be connected!

Why DAGs?

They come up a lot in practice. Cycles can be icky. Examples:

- Any sort of scheduling problem (scheduling your courses, scheduling fork-join threads, ...)
- Causal Structures (Bayesian Networks)
- Genealogy
- ...

Topological Sort


12

Topological Sort

Given a DAG ($G = (V, E)$), output all the vertices in an order such that no vertex appears before any vertex that has an edge to it.

"Output an order to process the graph that meets all dependencies"


This is how we can allocate work in the ForkJoin model!



Topological Sort

13

How Many Valid Topological Sorts?



- $T_1, T_2, T_3, T_4, T_5, T_6, T_7, T_8, T_9, T_{10}$
- $T_1, T_2, T_4, T_3, T_5, T_6, T_7, T_8, T_9, T_{10}$
- $T_1, T_2, T_5, T_4, T_3, T_6, T_7, T_8, T_9, T_{10}$
- $T_1, T_3, T_6, T_7, T_9, T_2, T_5, T_4, T_8, T_{10}$
- ...

An Idea

14

Implementing Topological Sort

Throw all the **in-degrees** in a priority queue. `removeMin()` repeatedly.

- This works, but it's **too slow**.
- Insight: PriorityQueues must deal with negative numbers; indegree will never be negative!
- Instead: Split ready vs. not ready (0 vs. non-zero) sets
- The "ready set" is a worklist!

Setup



```
1 output = []
2 deps = {}
3 worklist = []
4 for (v : vertices) {
5   deps[v] = in-degree(v);
6   if (deps[v] == 0) {
7     worklist.add(v);
8   }
9 }
```

Do Work

```
1 while (worklist.hasWork()) {
2   v = worklist.next();
3   output.add(v);
4   for (w : neighbors(v)) {
5     deps[w] -= 1;
6     if (deps[w] == 0) {
7       worklist.add(w);
8     }
9   }
10 }
```

Topologically Sorting A DAG (with a Queue)

15

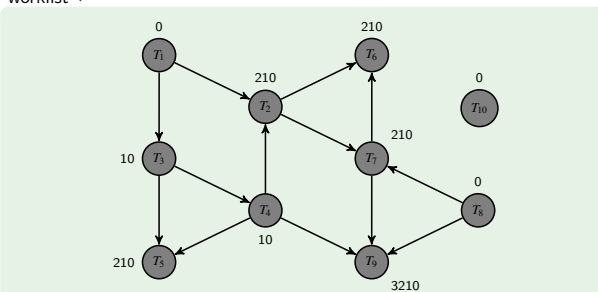

output: [] [] [] [] [] [] [] [] [] []
output: [] [] [] [] [] [] [] [] [] []
output: [] [] [] [] [] [] [] [] [] []

Analyzing Topological Sort

16

What happens if there is a cycle?

Our worklist will be empty before we've processed all of the vertices. (e.g., "there are no nodes ready to print next, but we haven't gone through all of them")

In this case: our algorithm should throw a "not a DAG exception".

Runtime?

- Setup: We follow every edge for every vertex: $\mathcal{O}(|V| + |E|)$
- We add/remove each vertex from the work list once: $\mathcal{O}(|V|)$
- We decrement each indegree until zero (once for each edge): $\mathcal{O}(|E|)$
- So, overall, it's graph linear!