


# CSE 332

## Data Abstractions

## B-Trees

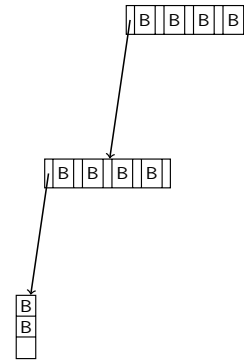


### Outline

- 1 A New Model For Time Complexity
- 2  $M$ -ary Search Trees
- 3 B-Trees

### A New Model?

1

We've been assuming that **all memory accesses** are the same. In practice, this isn't true. The memory hierarchy looks something like this:

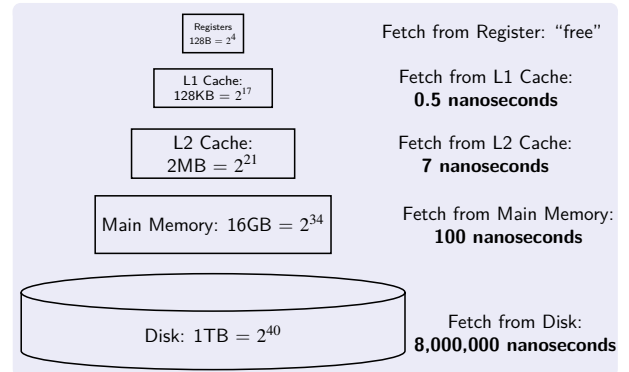

The take-away is that **disk accesses** are very expensive.

### A New Model?

2

Why do we care how the machine works?

Big-Oh is just an abstraction that says "all memory fetches are equal"... but in practice, some memory fetches are more equal than others. (**The disk is prohibitively slow.**)

AVL Trees: Big-Oh vs. Practice

We've seen that AVL Trees are  $\mathcal{O}(\lg n)$  which is great, but what if we account for disk accesses?

Consider an AVL Tree of height **40** where each node is  $b$  bytes.

- How many nodes in the tree?  $\lg n = 40 \rightarrow n = 2^{40}$ . So, we need about  $b$  terabytes for the tree. This means **an overwhelming majority is on the disk.**
- How many disk accesses does a `find` take? It could take none (**3 nanoseconds**) or it could take 40 (**0.3 seconds**). That's a difference of: 100,000,000

If the data structure is mostly on disk, yes, we still need a data structure that is  $\mathcal{O}(\lg n)$ , but **it's not enough anymore!**

### Okay...:(

3

#### Problem


A dictionary with so much data most of it is on disk

#### Goal


A balanced tree (logarithmic height) that is even shallower than AVL trees so that we can minimize disk accesses and exploit disk-block size

#### The Idea

Increase the branching factor of our tree



M-ary Search Tree




Like a binary tree, but with  $M$  branches instead of two.

M-ary Search Tree Properties

- Height (if balanced)?  $\mathcal{O}(\log_M(n))$
- Ordering Property?
  - Binary Tree: smaller on the left, larger on the right
  - M-ary Tree: split the range into  $M$  equal sized groups
- Runtime of find (if balanced)?  $\mathcal{O}(h \lg M) = \mathcal{O}(\log_M(n) \lg M)$ 
  - $h$  possible nodes to visit:  $\log_M(n)$
  - **Binary Search** on each node:  $\lg M$

M-ary Search Tree Example?



Some Questions


- What should the order property be?
- How would re-balancing work? **We DON'T want to do more disk accesses!**

Some Thoughts

- We will have to load the **values** (e.g., fruits) for all the internal nodes. This is very wasteful!
- Usually we are just "passing through" a node on the way to the value we are actually looking for.

Two Types of Nodes

**Internal Nodes**  
("sign posts")




An internal node has  $M-1$  **sorted** keys and  $M$  pointers to children

**Leaf Nodes**  
("real data")



A leaf node has  $L$  **sorted** key/value pairs

B-Tree Order Property

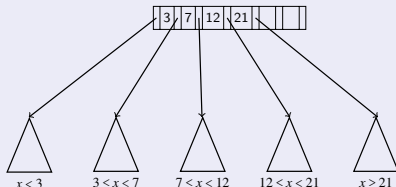

Subtree between  $a$  and  $b$  contains all data  $x$  where  $a \leq x < b$

First, choose  $M > 2$  and any  $L$ . (Here  $M = 4, L = 5$ .)


Very Few Nodes

If  $n \leq L$ , the ROOT is a LEAF:



Otherwise, the root must have between 2 and  $M$  children


B-Tree Example

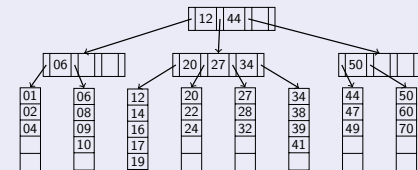

**Internal Nodes** must have between  $\lceil \frac{M}{2} \rceil$  and  $M$  children (i.e., half full).

**Leaf Nodes** must have between  $\lceil \frac{L}{2} \rceil$  and  $L$  children (i.e., half full).

Find

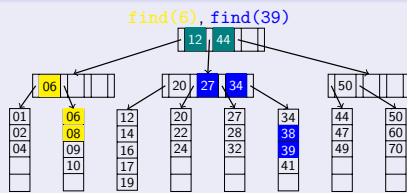


Balanced Enough!

Let  $M > 2$ . Since all nodes are at least half full (ignoring the root), we have:


$$2 \left\lceil \frac{M}{2} \right\rceil^{h-1} \text{ leaves, and each leaf has at least } \left\lceil \frac{L}{2} \right\rceil \text{ data items}$$

So,  $n \geq 2 \left\lceil \frac{M}{2} \right\rceil^{h-1} \times \left\lceil \frac{L}{2} \right\rceil$ . So, the height  $h$  is logarithmic in the number of data items  $n$ .

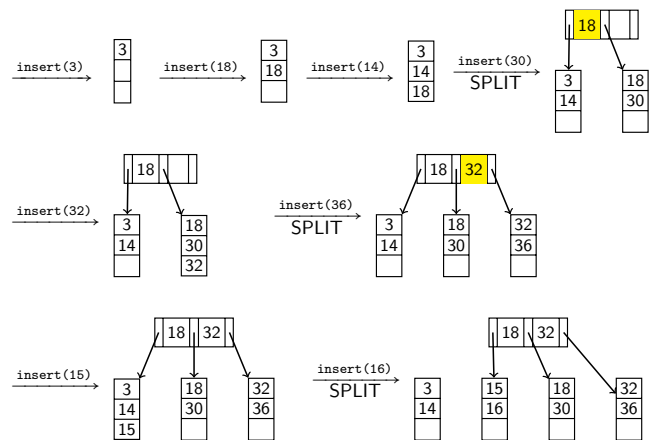

## B-Tree Insertion (Continued)


10

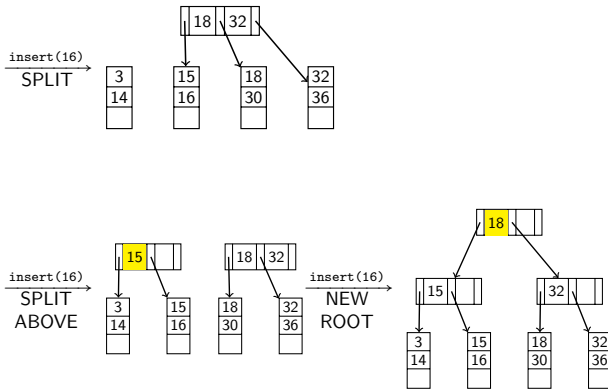

## B-Tree Insertion (Continued)

11

insert(12), insert(40), insert(45), insert(38)



Always fill the "signpost" with the smallest value to my right!

## Insertion Algorithm

12

- Insert the data in the correct leaf **in sorted order**.
- If the leaf has  $L + 1$  items, overflow:
  - Split the leaf into two new nodes:
    - Original leaf with  $\lceil \frac{L+1}{2} \rceil$  smaller items
    - New leaf with  $\lfloor \frac{L}{2} \rfloor$  larger items
  - Attach the new child to the parent
  - Add the new key to the parent in sorted order
- Recursively continue overflowing if necessary. Noting that on the internal nodes we split using  $M$  instead of  $L$ .
- In the case where the **root** overflows, make a new root.

## Efficiency of Insert

13

How Efficient is Insert?


- Find the correct leaf:  $\mathcal{O}(\lg(M) \log_M(n))$
  - Insert in the leaf:  $\mathcal{O}(L)$
  - Split leaf:  $\mathcal{O}(L)$
  - Split parents all the way up to the root:  $\mathcal{O}(M \log_M(n))$
- In total, this gives us  $\mathcal{O}(L + M \log_M(n))$ .

But It's Actually Pretty Good!

- Splits are very uncommon (think amortized analysis)
- Splitting the root almost never happens
- We're significantly more concerned about disk accesses than anything else:  $\mathcal{O}(\log_M(n))$


## B-Tree Deletion

14

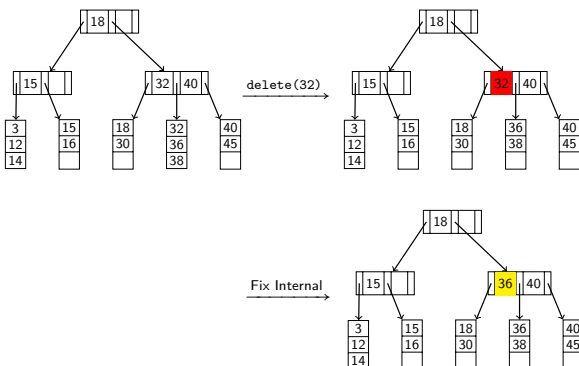

## B-Tree Deletion (Continued)


15

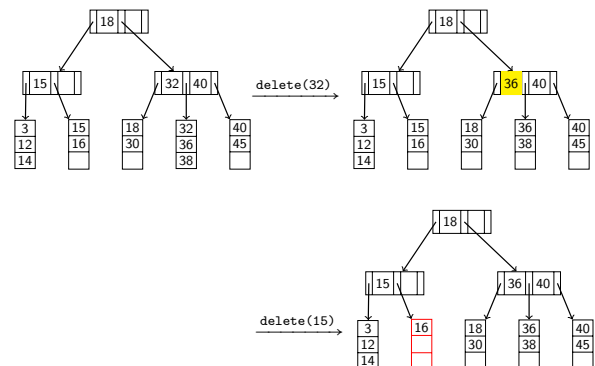

This breaks our invariant. Leaves must have more than one node!


## B-Tree Deletion (Continued)

16

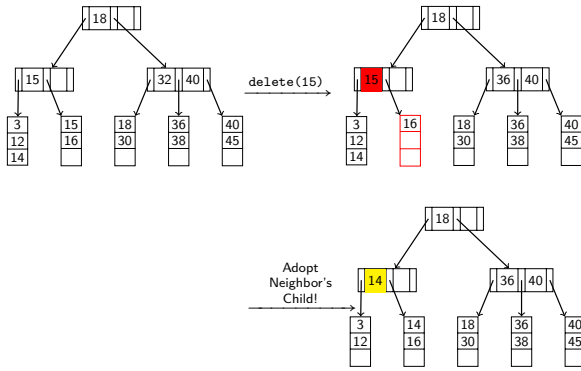


## B-Tree Deletion (Continued)

17

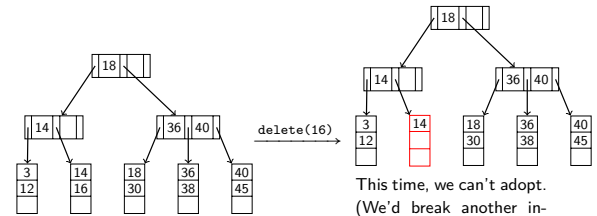


This time, we can't adopt. (We'd break another invariant.) The solution is to adopt **recursively**.

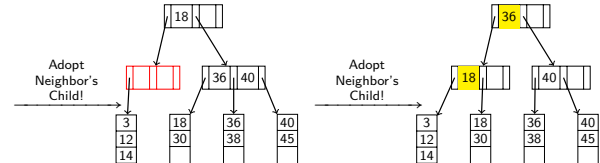


## B-Tree Deletion (Continued)

18

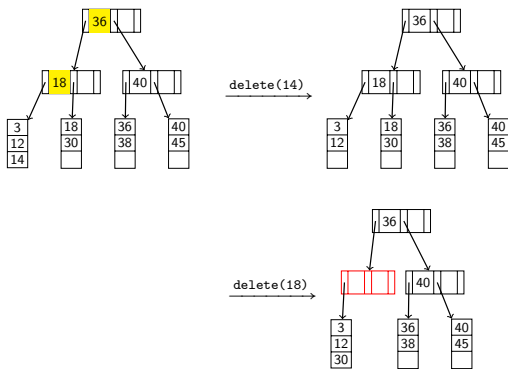

## B-Tree Deletion (Continued)

19

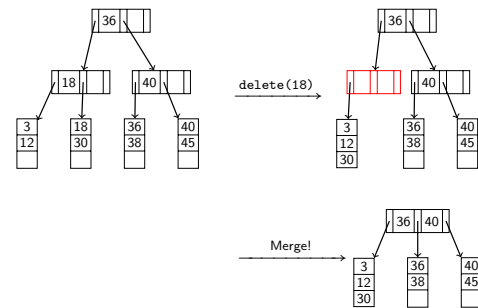

## Deletion Algorithm

20

- Remove the data from correct leaf.
- If the leaf has  $\left\lceil \frac{L}{2} \right\rceil - 1$  items, underflow:
  - If a neighbor has more than  $\left\lceil \frac{L}{2} \right\rceil$ , adopt one!
  - Otherwise, **merge** with a neighbor (parent will now have one fewer node)
- Recursively continue underflowing if necessary. Noting that on the internal nodes we split using  $M$  instead of  $L$ .
- If we merge all the way up to the root and the root went from  $2 \rightarrow 1$  children, then delete the root and make the child the root.

## Efficiency of Delete

21

### How Efficient is Delete?

- Find the correct leaf:  $\mathcal{O}(\lg(M) \log_M(n))$
- Remove from the leaf:  $\mathcal{O}(L)$
- Adopt/Merge with neighbor:  $\mathcal{O}(L)$
- Merge parents all the way up to the root:  $\mathcal{O}(M \log_M(n))$

In total, this gives us  $\mathcal{O}(L + M \log_M(n))$ .

### But It's Actually Pretty Good!

- Merges are very uncommon (think amortized analysis)
- We're significantly more concerned about disk accesses than anything else:  $\mathcal{O}(\log_M(n))$

## What makes B-Trees so disk friendly?

- Many keys stored in one internal node: all brought into memory in one disk access
- Makes the binary search over  $M - 1$  keys totally worth it (insignificant compared to disk access times)
- Internal nodes contain only keys (it's a waste to load all the values)

We take advantage of the choice of  $M$  and  $L$  to ensure good behavior!

We want each of  $M$  and  $L$  to fit as best as possible in the **page size**.

Say we know the following:

- 1 page on disk is  $p$  bytes
- Keys are  $k$  bytes
- Pointers are  $t$  bytes
- Key/Value pairs are  $v$  bytes

Then, we should choose the following:

- $p \geq M \times (\text{size of a pointer}) + (M - 1) \times (\text{size of a key}) = Mt + (M - 1)k$ .  
So,  $M = \left\lfloor \frac{p+k}{t+k} \right\rfloor$ .
- $p \geq L \times v$ . So,  $L = \left\lfloor \frac{p}{v} \right\rfloor$ .

Balanced trees make good dictionaries because they guarantee logarithmic-time `find`, `insert`, and `delete`

- Essential and beautiful computer science
- But only if you can maintain balance within the time bound
- **AVL Trees** maintain balance by tracking height and allowing all children to differ in height by at most 1
- **B-Trees** maintain balance by keeping nodes at least half full and all leaves at same height
- Other great balanced trees (see text; worth knowing they exist)
  - Red-black trees: all leaves have depth within a factor of 2
  - Splay trees: self-adjusting; amortized guarantee; no extra space for height information